
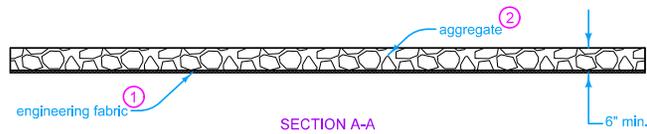


Obtain the Engineer's approval for location and length of stabilized entrances prior to constructing.

Method of Measurement for Stabilized Construction Entrance will be in linear feet measured along the length of the entrance at the entrance centerline.

Basis of Payment for Stabilized Construction Entrance will be at the contract unit price per linear foot. Payment is full compensation for furnishing all materials and work necessary for installation, maintenance, and removal of stabilized construction entrance. Maintenance includes installing additional material or cleaning required to maintain the entrance in a functional condition.

- ① Place engineering fabric prior to placing aggregate. Use fabric for Embankment Erosion Control complying with Section 4196 of the Standard Specifications.
- ② Use aggregate meeting Gradation No. 13 of Section 4109 of the Standard Specifications.

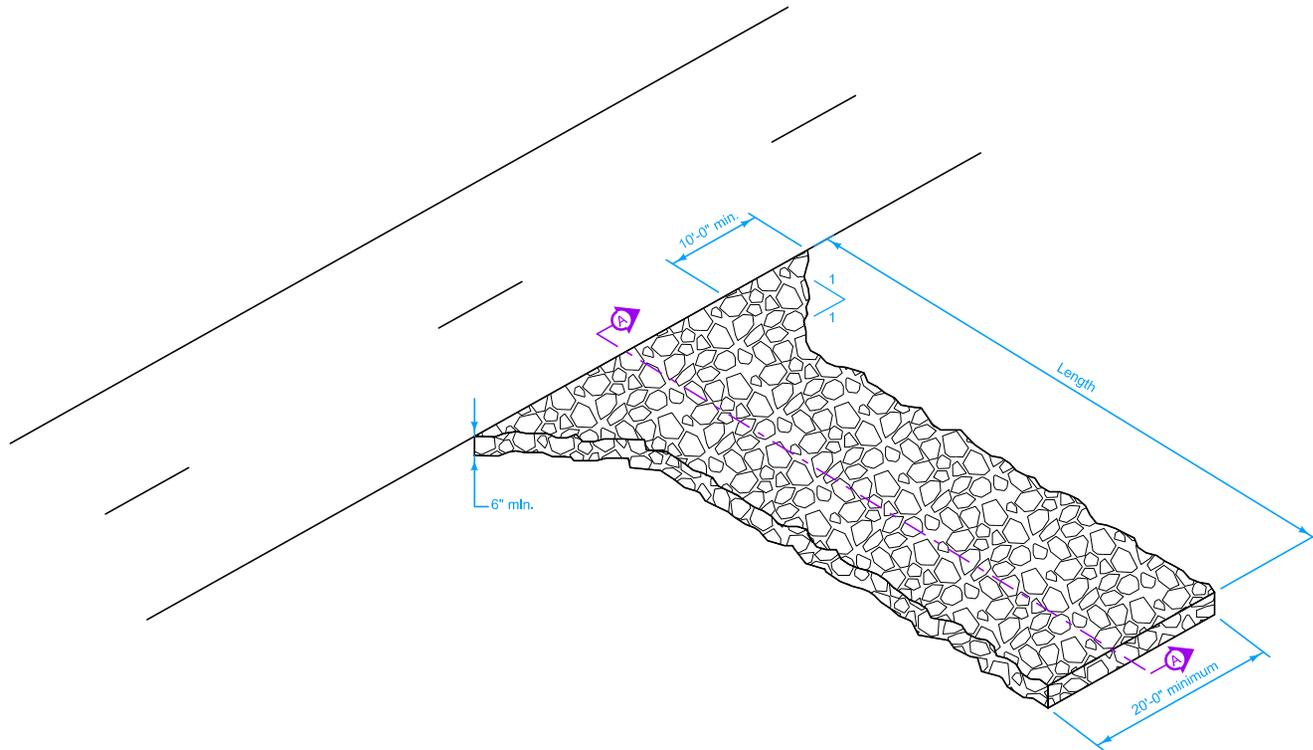

Possible Contract Item:  
Stabilized Construction Entrance

<b>IOWA DOT</b>	REVISION	
	NEW	04-18-17
<b>ROAD DESIGN DETAIL</b>		<b>570-10</b>
		SHEET 1 of 1

REVISIONS: NEW

**STABILIZED CONSTRUCTION ENTRANCE**