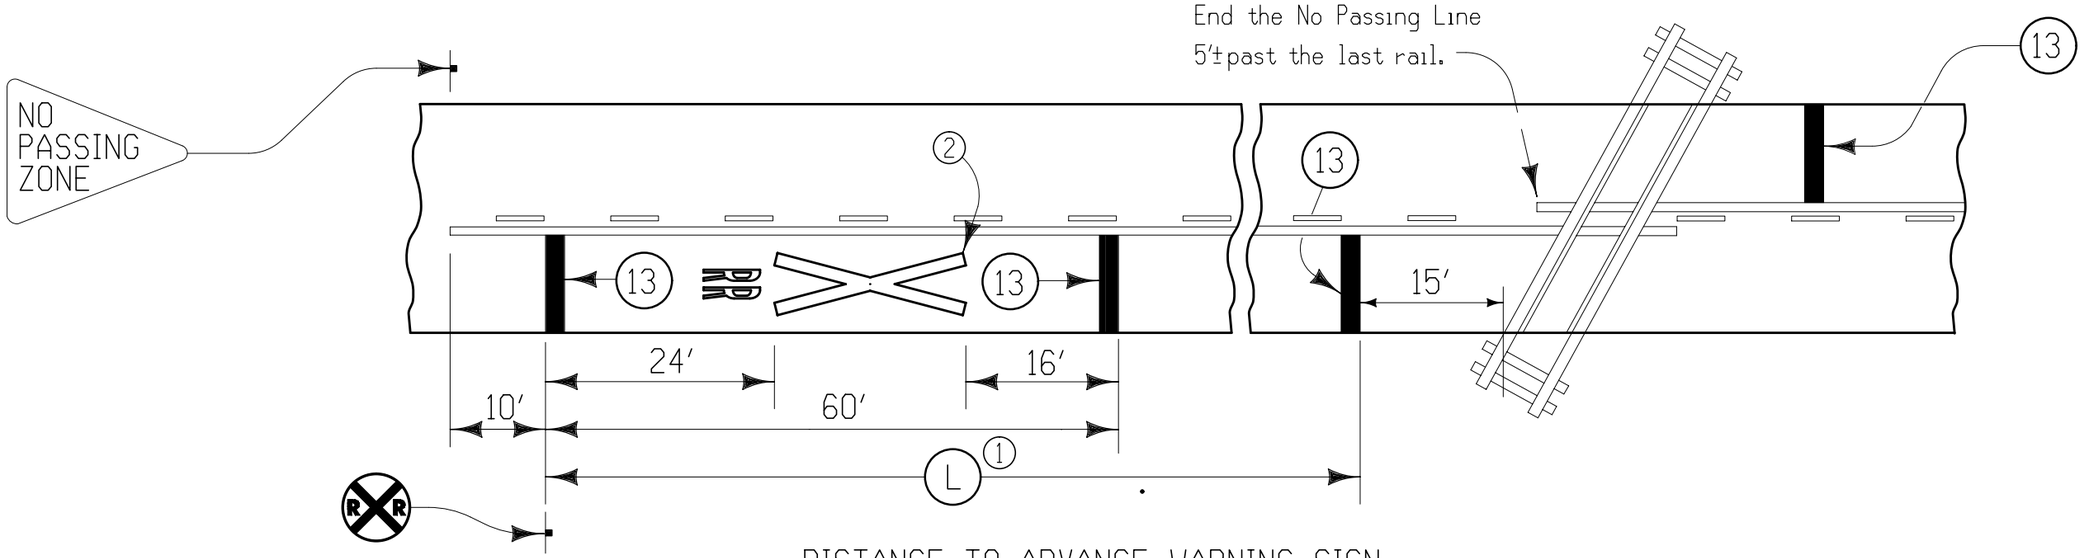

DISTANCE TO ADVANCE WARNING SIGN

POSTED SPEED LIMIT	(L)(1)
30 MPH	325'
35 MPH	400'
40 MPH	475'
45 MPH	550'
50 MPH	625'
55 MPH	700'

On multi-lane roads the transverse bands shall extend across all approach lanes, and individual RRX symbols shall be used in each approach lane.

(1) Minimum Distance - may be increased to fit conditions at individual crossings.

(2) Refer to Typical Detail 9005 for symbol layout.

(13) Refer to Typical Detail 9001

STANDARD PAVEMENT MARKING AT RAILROAD AND HIGHWAY GRADE CROSSING WITHOUT GATES