


PART LONGITUDINAL SECTION NEAR GUTTER

PART END VIEW AT ABUTMENT


SECTION A-A


NOTE:  
PLUG 3" PVC PIPE WITH  
EXPANDING FOAM PRIOR  
TO BACKFILLING BEHIND  
ABUTMENTS.

NOTE:  
FOR ELEVATION A, ELEVATION B, ELEVATION C AND  
DIMENSION C SEE "MISCELLANEOUS DETAILS"  
FOR THE APPROPRIATE LENGTH BRIDGE.

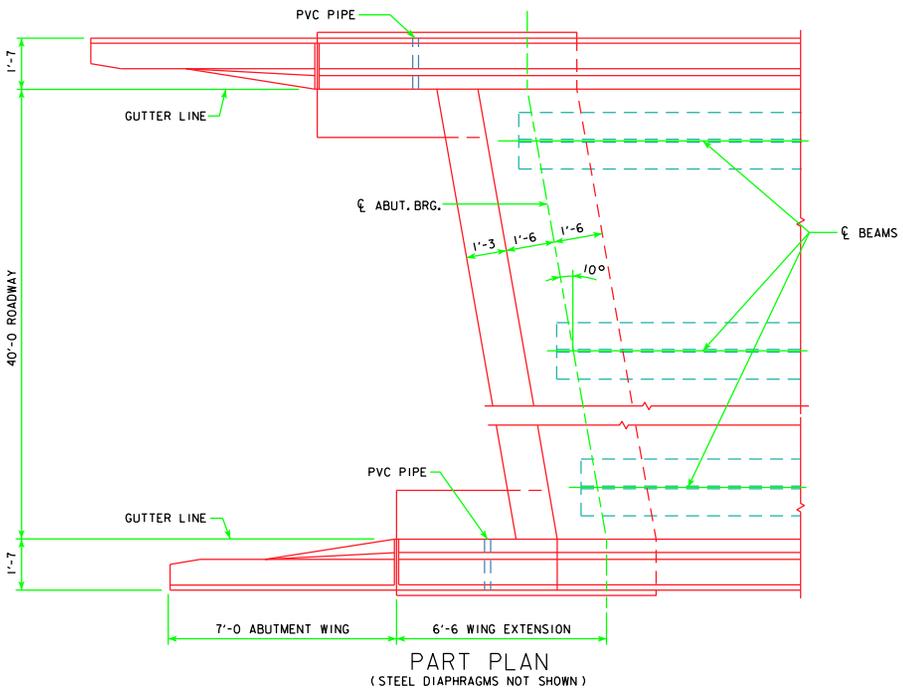

PART PLAN  
(STEEL DIAPHRAGMS NOT SHOWN)



LATEST REVISION DATE	 APPROVED BY BRIDGE ENGINEER	 <b>Iowa Department of Transportation</b> Highway Division	
		STANDARD DESIGN - 40' ROADWAY, 3 SPAN BRIDGES <b>ROLLED STEEL BEAM BRIDGES</b> JUNE, 2010	
		LONGITUDINAL SECTION 10° SKEW	RS40-022-10