


PART LONGITUDINAL SECTION NEAR GUTTER

PART END VIEW AT ABUTMENT


SECTION A-A

NOTE:
 PLUG 3" PVC PIPE WITH
 EXPANDING FOAM PRIOR
 TO BACKFILLING BEHIND
 ABUTMENTS.

NOTE:
 FOR ELEVATION A, ELEVATION B, ELEVATION C AND
 DIMENSION C SEE "MISCELLANEOUS DETAILS"
 FOR THE APPROPRIATE LENGTH BRIDGE.

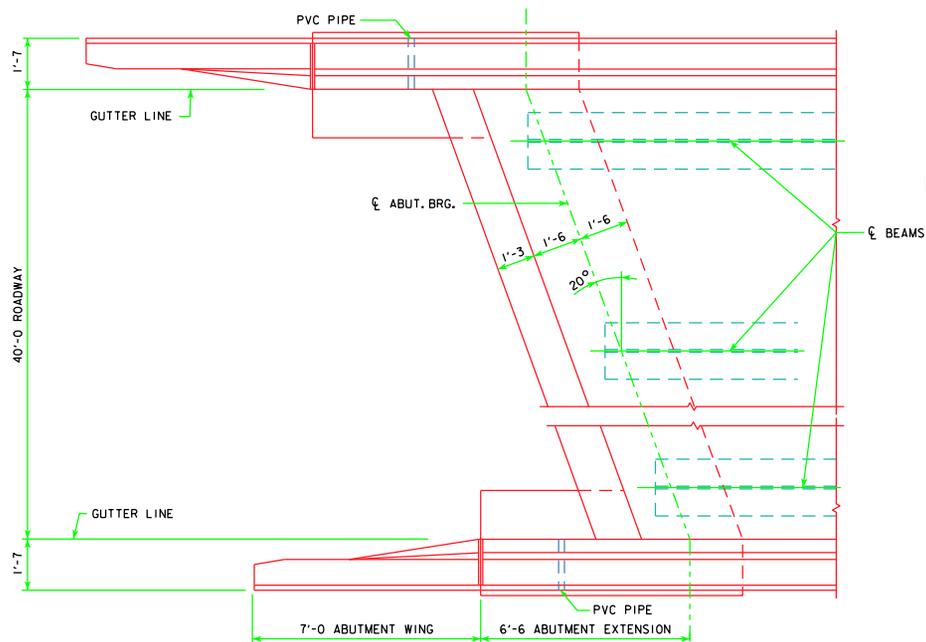

PART PLAN
 (STEEL DIAPHRAGMS NOT SHOWN)

LATEST REVISION DATE	 APPROVED BY BRIDGE ENGINEER	 Iowa Department of Transportation Highway Division	
		STANDARD DESIGN - 40' ROADWAY, 3 SPAN BRIDGES ROLLED STEEL BEAM BRIDGES JUNE, 2010	
		LONGITUDINAL SECTION 20° SKEW	RS40-024-10