


PART LONGITUDINAL SECTION NEAR GUTTER

PART END VIEW AT ABUTMENT


SECTION A-A

NOTE:  
 PLUG 3" PVC PIPE WITH  
 EXPANDING FOAM PRIOR  
 TO BACKFILLING BEHIND  
 ABUTMENTS.

NOTE:  
 FOR ELEVATION A, ELEVATION B, ELEVATION C AND  
 DIMENSION C SEE "MISCELLANEOUS DETAILS"  
 FOR THE APPROPRIATE LENGTH BRIDGE.

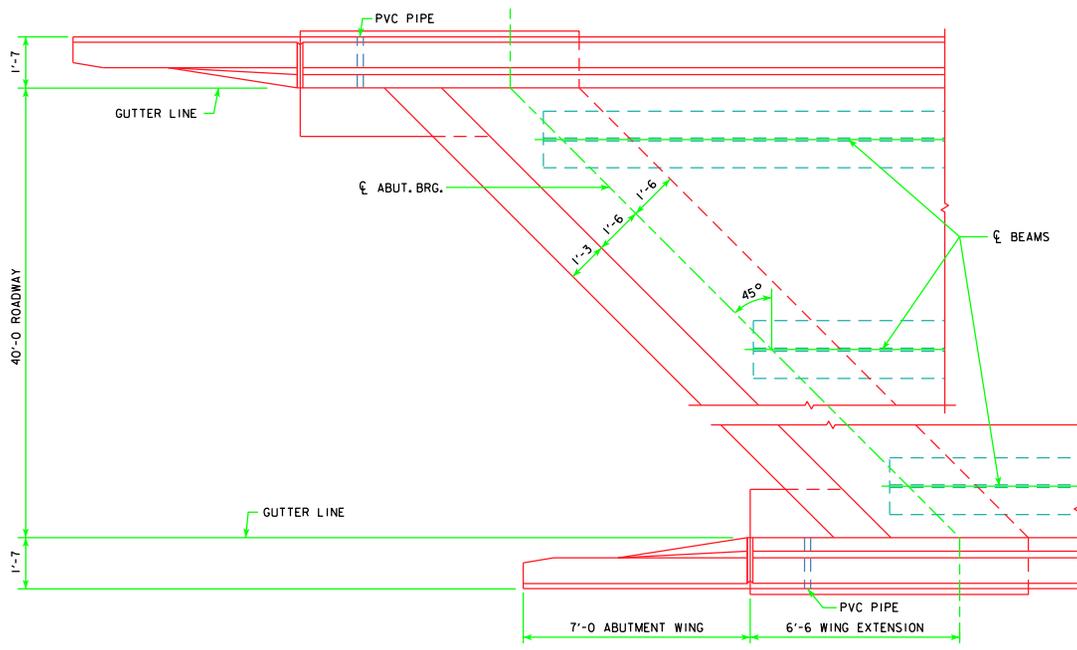

PART PLAN  
 (STEEL DIAPHRAGMS NOT SHOWN)



LATEST REVISION DATE	 APPROVED BY BRIDGE ENGINEER	 STANDARD DESIGN - 40' ROADWAY, 3 SPAN BRIDGES <b>ROLLED STEEL BEAM BRIDGES</b> JUNE, 2010	
		LONGITUDINAL SECTION 45° SKEW	RS40-028-10