


Pay limits for contract item include the following areas:

-  Double Reinforced Section
-  Single Reinforced Section
-  Non-Reinforced Section

- ① Build 4 inch Sloped Curb, unless noted otherwise in the plans.
- ② See RK-20, RK-25, or RK-26.
- ③ Longitudinal joint: (PV-101)
Single Pour - Saw cut joint per detail B.
Two Pours - Use 'KS-2' Joint (Double Reinforced Section).
Use 'KS-1' Joint (Single Reinforced Section).
- ④ Polymer grid and excavation limits of Modified Subbase 2' outside of pavement edge. See RK-20, RK-25, or RK-26.
- ⑤ Slope subdrain to drain.
- ⑥ An "X" shall be placed in the plastic concrete near the 'EF' joint at the outside edge of pavement.
- ⑦ 4 inch perforated subdrain (polyethylene, corrugated tubing).
- ⑧ See RF-19C or RF-19E for outlet details.
- ⑨ 'DW' or 'RT' Joint.

For joint details, see PV-101.

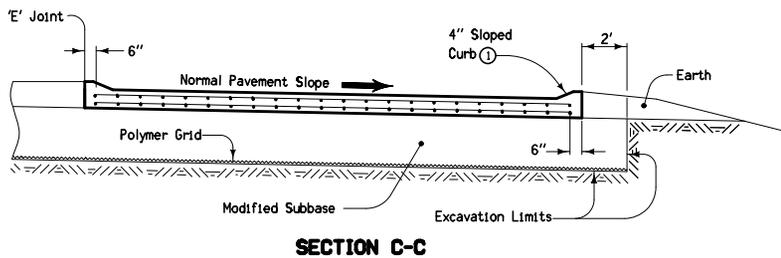

 Iowa Department of Transportation STANDARD ROAD PLAN <small>REVISIONS: Updated references to renamed standards.</small>	<small>REVISION</small> 7 04-19-11
	RK-23 <small>SHEET 1 of 1</small>
<i>Deanna Macfield</i> <small>APPROVED BY DESIGN METHODS ENGINEER</small>	
BRIDGE APPROACH (MULTI-LANE, CURBED ROADWAY)	