



**RECTANGULAR**

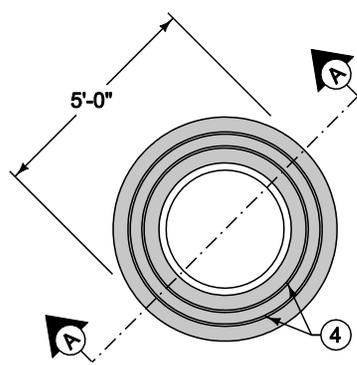


**CIRCULAR**

Construct boxout with Class C concrete. Minimum 2 inches clear on reinforcement. Center casting within boxout area.

- ① 4 foot 8 inch (typ.) #4 bar. Place at mid-slab.
- ② If boxout is constructed prior to placement of HMA overlay or final lift of HMA pavement, boxout may be constructed low and then final lift or overlay placed.
- ③ Apply tack coat.
- ④ #4 hoops (variable length). Place at mid-slab.

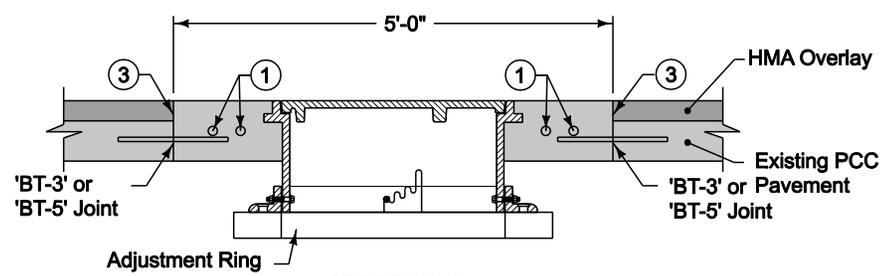

**SECTION A-A**  
(For three-piece floating casting)

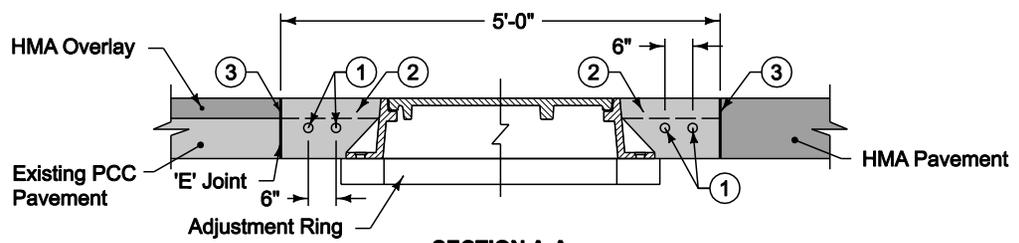

**SECTION A-A**  
(For two-piece fixed casting)

FIGURE 7020.201 SHEET 1 OF 1

	<b>SUDAS</b>	<small>REVISION</small> New 10-19-10
	<b>7020.201</b>	<small>SHEET 1 of 1</small>
<b>SUDAS Standard Specifications</b>		
<b>MANHOLE BOXOUTS IN HMA PAVEMENT AND HMA OVERLAYS</b>		