8303
10-22-93

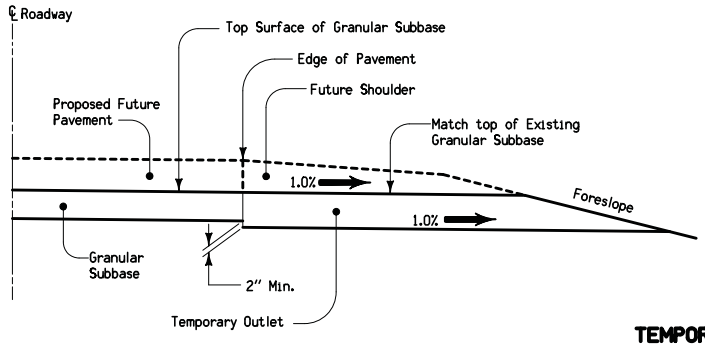

NOTES:

When granular subbase is placed under conditions where positive drainage is not present, a temporary outlet shall be constructed by placing a granular subbase 'French' drain a minimum 18" wide at the location tabulated for a future longitudinal subdrain outlet. This work shall be considered incidental to "Granular Subbase".

TEMPORARY OUTLET FOR GRANULAR SUBBASE DRAINAGE