


8207

10-28-97

Dimensions in mm
unless noted.

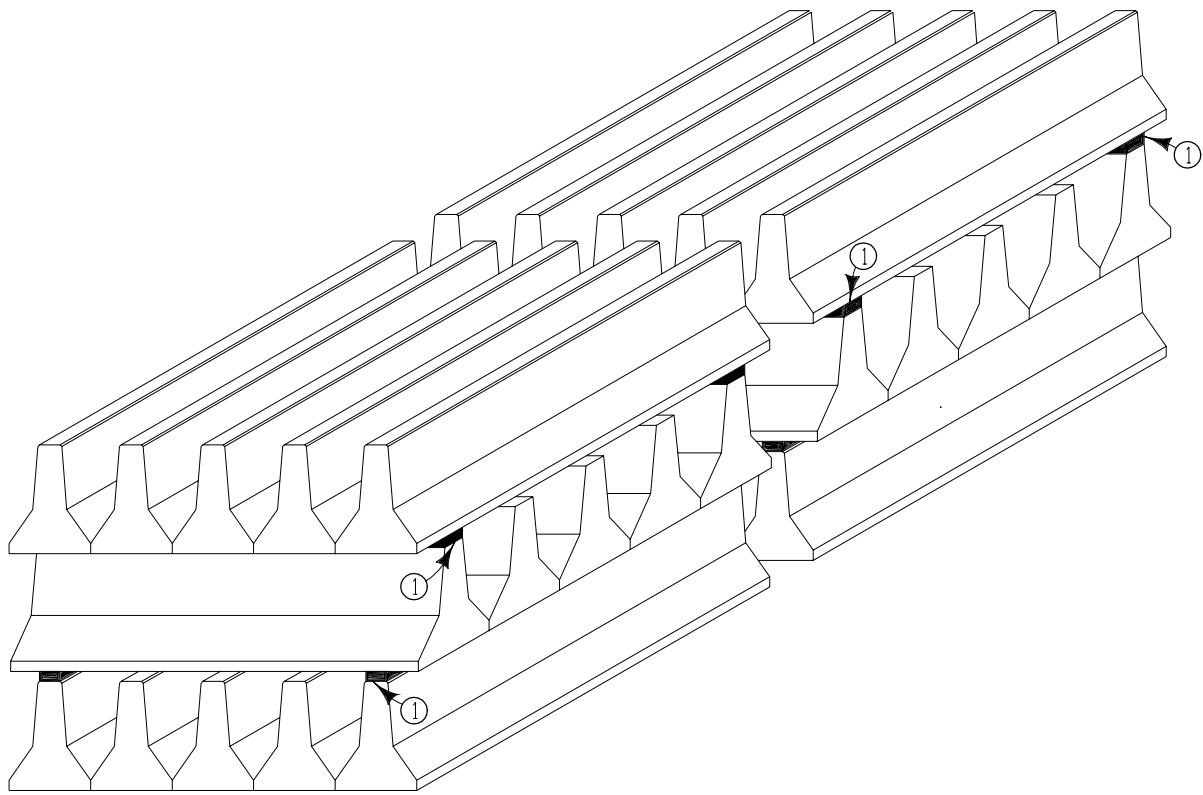

Notes:

At the completion of the project, the Contractor shall stack the temporary barrier rail at locations designated in the plans.

Barrier sections shall be stacked 3 high in alternating layers or as modified by the Engineer.

The cost of hauling and stacking the temporary barrier rail shall be incidental to the item "Temporary Barrier Rail."

① 50 mm x 100 mm or scrap lumber.

STORAGE PLAN FOR BARRIER RAIL