
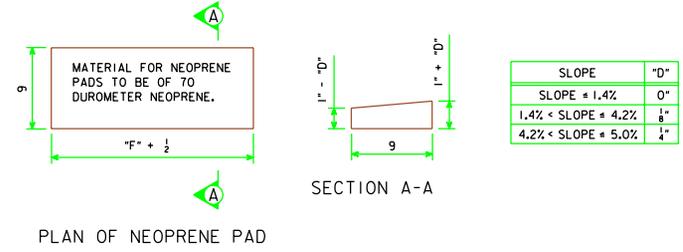
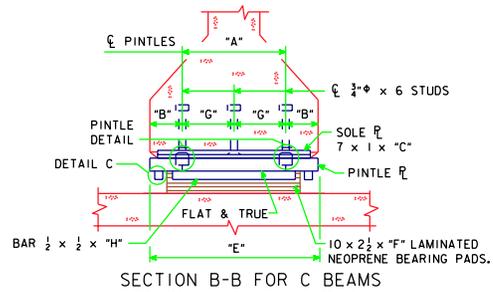
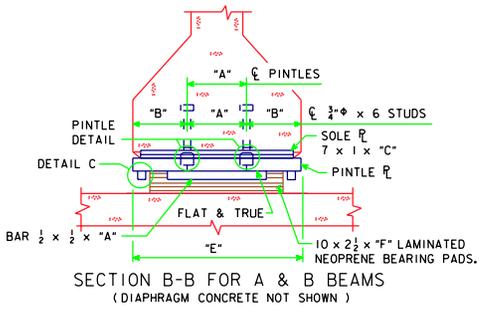
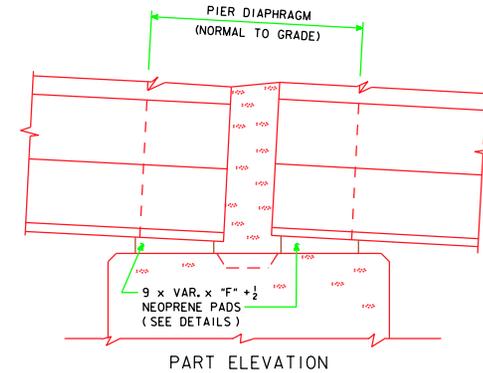





REVISED 01-10 - EXPANSION PIER DETAILS WERE UPDATED TO AGREE WITH CURRENT STANDARDS.

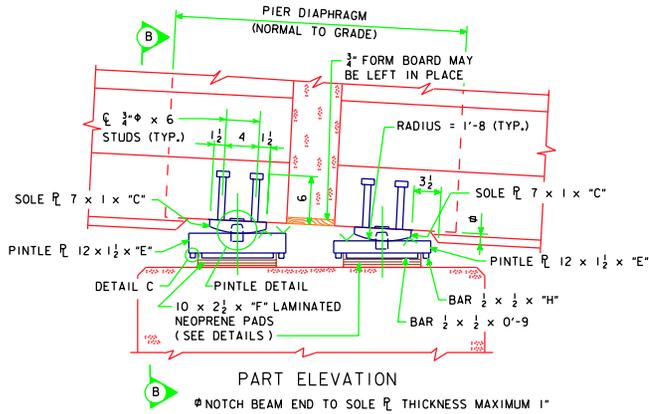

SLOPE CALCULATION FORMULA

SLOPE <sub>SPAN 1</sub> = 100%	P/G ELEV. @ NEAR ABUT. - P/G ELEV. @ PIER 1 SPAN 1 LENGTH
SLOPE <sub>SPAN 2</sub> = 100%	P/G ELEV. @ PIER 1 - P/G ELEV. @ PIER 2 SPAN 2 LENGTH
SLOPE <sub>SPAN 3</sub> = 100%	P/G ELEV. @ PIER 2 - P/G ELEV. @ FAR ABUT. SPAN 3 LENGTH

**FIXED PIER BEARING NOTES:**  
 IF CALCULATED SLOPE FOR A GIVEN SPAN EXCEEDS 1.4%, THE NEOPRENE BEARING PADS AT THE FIXED PIER FOR THAT SPAN SHALL BE TAPERED. REFER TO TABLE FOR DIMENSIONS OF TAPERED PADS.  
 COST OF NEOPRENE PADS SHALL BE INCLUDED IN THE PRICE BID FOR "PRETENSIONED PRESTRESSED CONCRETE BEAMS".

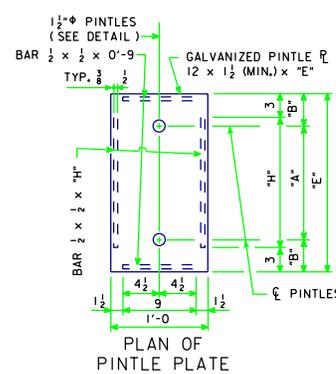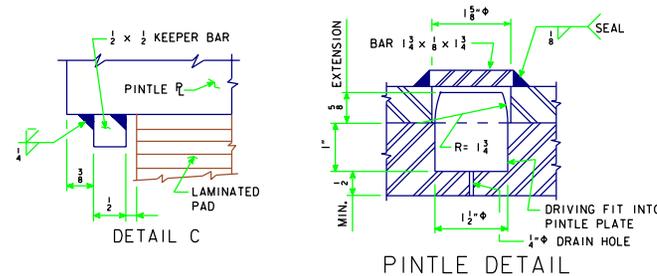

**EXPANSION PIER BEARING NOTES:**  
 SURFACES MARKED "V" SHALL BE FINISHED ANSI 250.  
 PINTLE PLATES ARE A PART OF THE SUPERSTRUCTURE "STRUCTURAL STEEL QUANTITY". COSTS OF ANCHORED CURVED SOLE PLATES AND NEOPRENE PADS ARE TO BE INCLUDED IN THE PRICE BID FOR "PRETENSIONED PRESTRESSED CONCRETE BEAMS".  
 THE SOLE PLATES AND PINTLE PLATES SHALL BE GALVANIZED. ALL WELDING SHALL BE COMPLETED PRIOR TO GALVANIZING. THE SURFACE OF THE PINTLE PLATE IN CONTACT WITH THE LAMINATED NEOPRENE PADS SHALL BE FREE OF PROJECTIONS DUE TO THE GALVANIZING.  
 SOLE PLATES ARE TO BE SET IN FORMS WHEN BEAMS ARE CAST AND THE BOTTOM OF BEAMS FORMED OUT AS SHOWN TO EXCLUDE CONCRETE.  
 SOLE PLATES SHALL COMPLY WITH ONE OF THE FOLLOWING:  
 ASTM A 852  
 ASTM A 514 GRADE B  
 ASTM A 709 GRADE HPS 70W

**EXPANSION PIER**

**VARIABLE DIMENSIONS**

	BEAM BOTTOM FLANGE WIDTH	
	A & B BEAMS 1'-5"	C BEAMS 1'-8"
"A"	0'-6"	1'-0"
"B"	0'-5 1/2"	0'-4"
"C"	1'-3 1/2"	1'-6 1/2"
"E"	1'-5"	1'-8"
"F"	1'-3"	1'-6"
"G"		0'-6"
"H"	0'-11"	1'-2"

LATEST REVISION DATE  
 01-10  
 APPROVED BY BRIDGE ENGINEER  
 [Signature]

**Iowa Department of Transportation**  
**Highway Division**

STANDARD DESIGN - 24' ROADWAY, THREE SPAN BRIDGE  
**PRETENSIONED PRESTRESSED CONCRETE BEAM BRIDGES**  
 DECEMBER, 2006

PIER BEARING DETAILS H24-41-06