




SILT DITCH

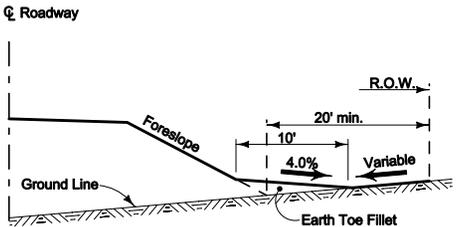


TOE FILLET ①

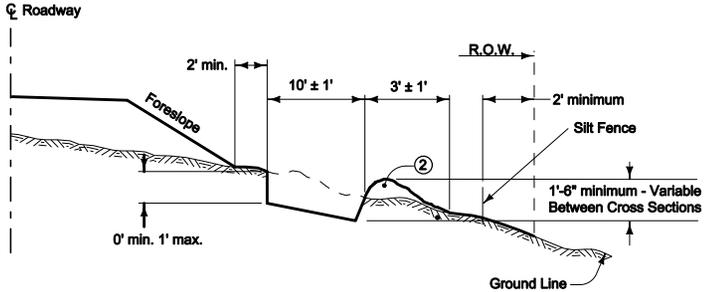


SILT DIKE

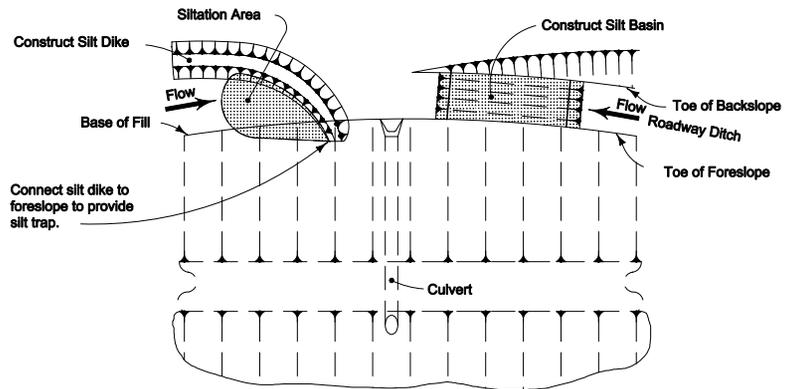

TYPICAL PLAN WITH PERMANENT CULVERT INSTALLATION

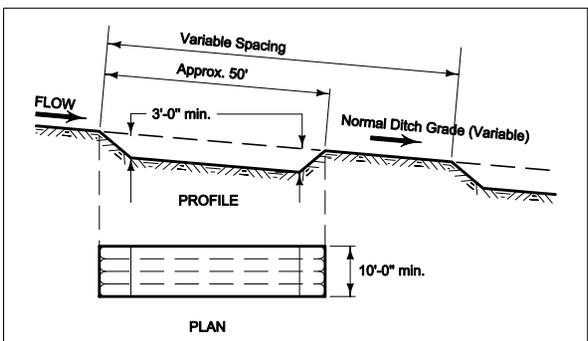

PLAN

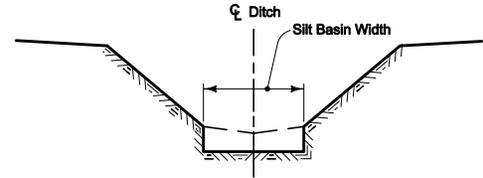

SECTION

SILT BASIN

All installation locations are to be approved by the engineer.

- ① Construct an earth fillet at the toe of the roadway foreslope for areas where a roadway ditch, silt ditch, or silt dike are not provided. This Toe Fillet is incidental to "Roadway and Borrow Excavation".
- ② Windrow of excavated and compacted silt material or deposited and compacted earth.

Possible Contract Items:

- Silt Ditch
- Silt Dike
- Silt Basin

Possible Tabulations:

- 100-13
- 100-14
- 100-15

<p>Iowa Department of Transportation</p> <p>STANDARD ROAD PLAN</p> <p>REVISIONS: Change reference from Tab 100-19 to 100-13, 100-14 and 100-15.</p> <p style="text-align: right;"><i>Deanna McFalls</i> APPROVED BY DESIGN METHODS ENGINEER</p>	REVISION 8 04-20-10
	RL-9
	SHEET 1 of 1
TEMPORARY EROSION CONTROL MEASURES	