Elevations and dimensions not given are as specified in the contract documents.

1. Drill four, 5/8 inch diameter holes, 3 inches from bottom of riser pipe and insert two, #4 bars in an "X" configuration.
   Length of bars = D+16 inches

2. Provide perforation configuration as specified in the contract documents.

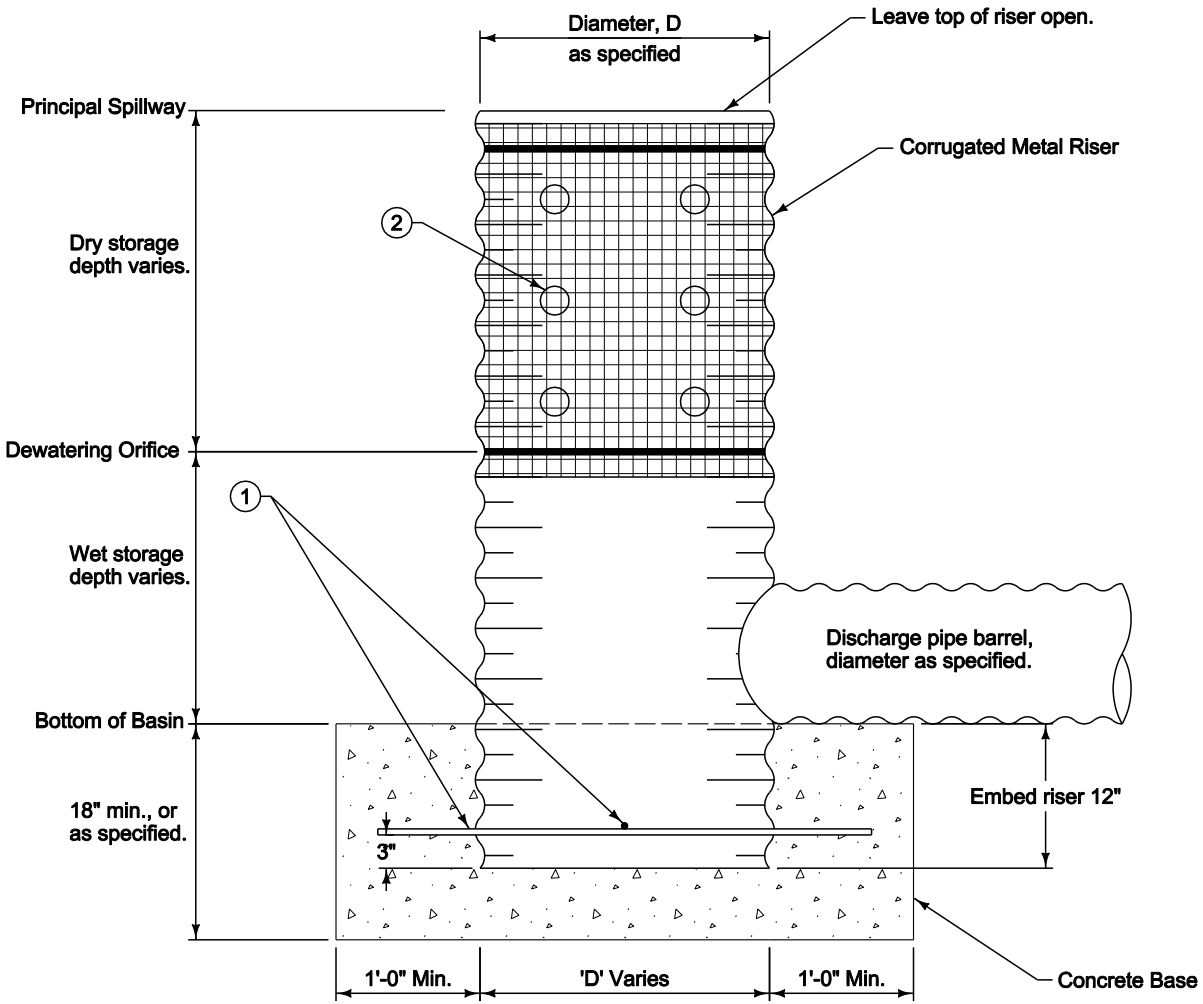

FIGURE 9040.15

SHEET 1 OF 1

SUDAS

REVISION	
1	10-18-11

9040.15

SHEET 1 of 1

SUDAS Standard Specifications

SEDIMENT BASIN
DEWATERING DEVICE
(PERFORATED RISER)