Diversion Types 1, 2, and 3 may be used interchangably unless otherwise specified in the contract documents.

Alternate configurations may be used upon approval from the Engineer.

(H) Total height of diversion (swale and berm): 18 inch minimum or as specified.

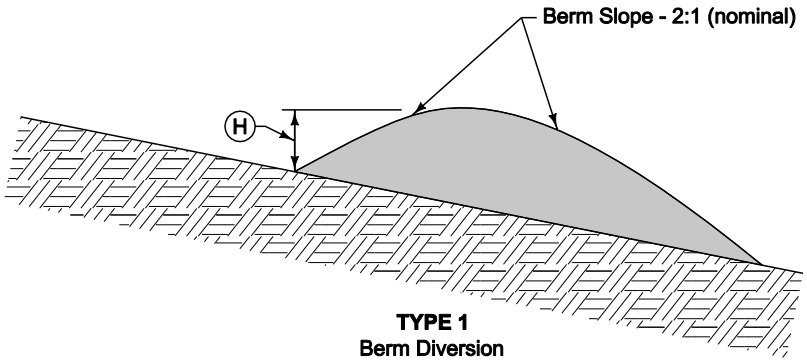

TYPE 1
Berm Diversion

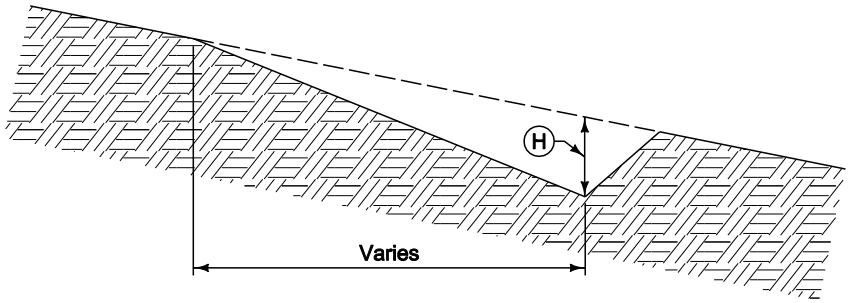

TYPE 2
'V' Ditch Diversion

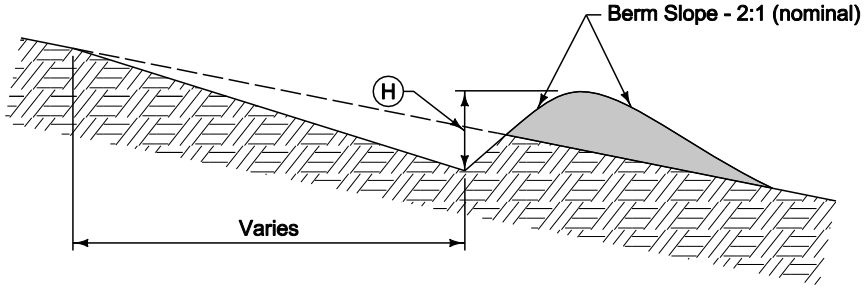

TYPE 3
Ditch/Berm Diversion

REVISION	
1	10-18-11

SUDAS

9040.8

SHEET 1 of 1

SUDAS Standard Specifications

TEMPORARY EARTH DIVERSION STRUCTURES

FIGURE 9040.8 | SHEET 1 OF 1