(1) Entrance length: 50 foot minimum (30 foot for single family residential), or as specified in the contract documents. Length of entrance may be increased if sediment track-out occurs.

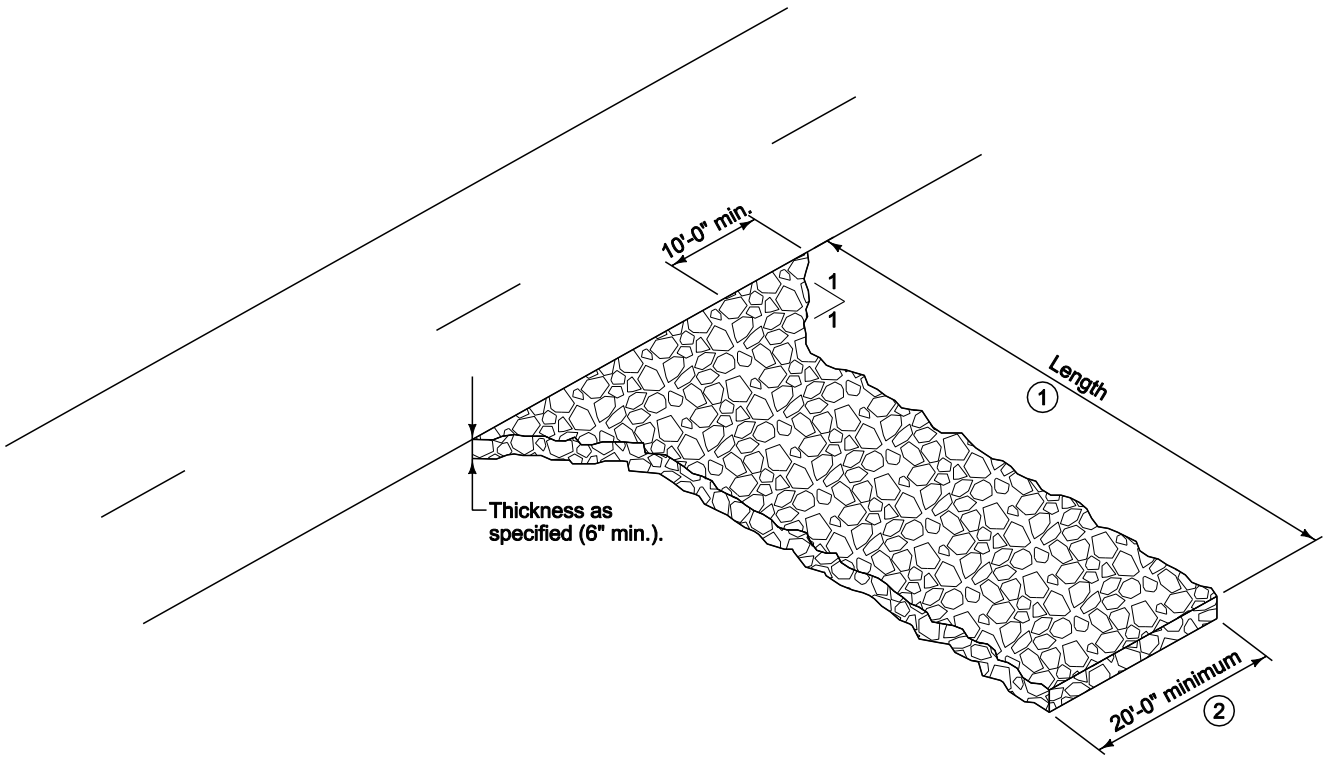

REVISION	
1	10-18-11

SUDAS

9040.20

SHEET 1 of 1

SUDAS Standard Specifications

STABILIZED
CONSTRUCTION ENTRANCE

FIGURE 9040.20 | SHEET 1 OF 1