


THE CONCRETE SEALER LIMITS ARE SHOWN
IN THE DETAIL AND SHALL APPLY TO THE
FULL LENGTH OF BRIDGE. CONCRETE SEALER
SHALL BE APPLIED IN ACCORDANCE WITH
ARTICLE 2403.03, P, 3, OF THE STANDARD
SPECIFICATIONS.

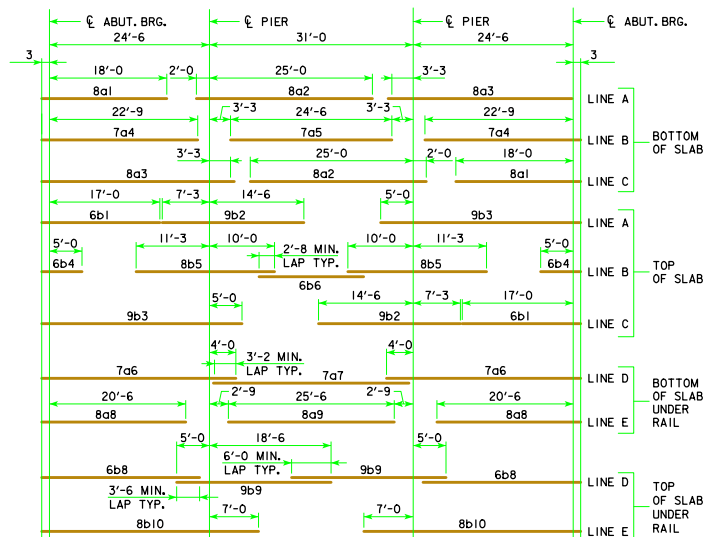

POSITION OF SLAB IMMEDIATELY AFTER FALSEWORK IS REMOVED

ABUT. BRG. PIER

TOP OF SLAB AS FORMED PIER

SYMMETRICAL ABOUT CL BRIDGE

FINAL GRADE LINE

4 SPA. @ 6'-1 1/2" = 24'-6"

2 SPA. @ 7'-9" = 15'-6"

THIS DIAGRAM SHOWS THE FORM CAMBER REQUIRED TO COMPENSATE FOR THE ANTICIPATED ULTIMATE DEAD LOAD DEFLECTION. THE ABOVE DIMENSIONS DO NOT INCLUDE ANY ALLOWANCE FOR FORM DEFLECTION OR FALSEWORK SETTLEMENT.