


LAPPING PROCEDURE

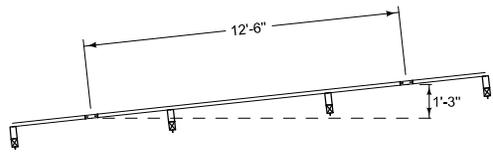

VARIABLE FLARE

Install delineators and object markers according to **SI-211**.
 For grading requirements, see **EW-301**.
 For general guardrail details, see **BA-200**.

- ① See **BA-201**.
- ② See **BA-202** for connections to concrete barriers and bridge end posts.
- ③ See **BA-205**.
- ④ See **BA-206**.

Possible Contract Items:
 Steel Beam Guardrail
 Steel Beam Guardrail Barrier Transition Section
 Steel Beam Guardrail End Anchor, Bolted
 Steel Beam Guardrail End Terminal

Possible Tabulation:
108-8A

<p style="margin: 0;">Iowa Department of Transportation</p>	REVISION
	2 10-18-11
STANDARD ROAD PLAN	BA-250
SHEET 1 of 1	
REVISIONS: Updated reference to renamed standards.	
<p style="margin: 0; font-size: x-small;">APPROVED BY DESIGN METHODS ENGINEER</p>	
STEEL BEAM GUARDRAIL INSTALLATION AT CONCRETE BARRIER OR BRIDGE END POST	