




PERIMETER CONTROL

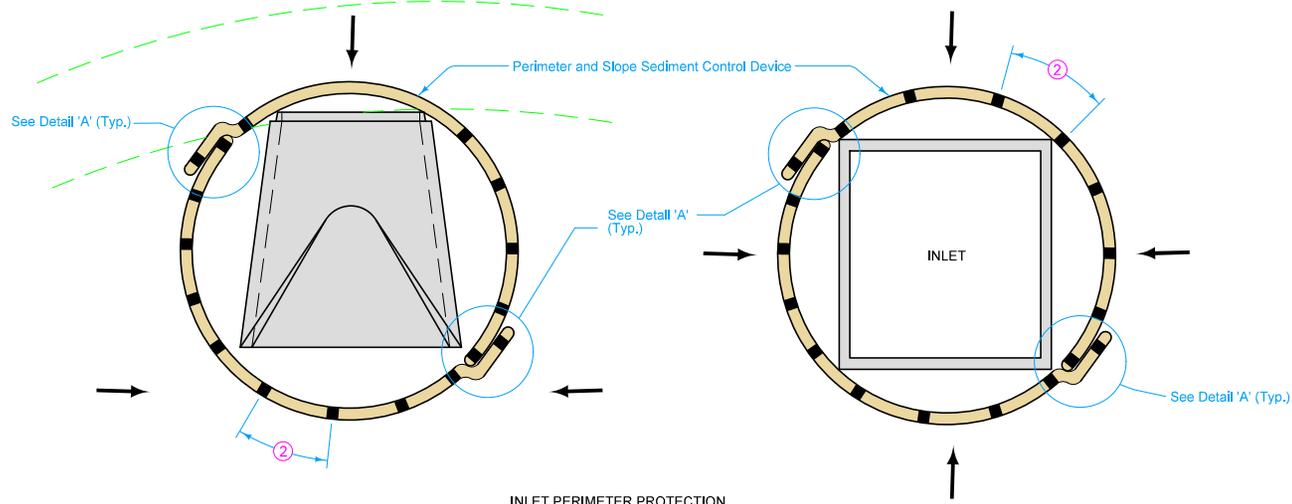

INLET PERIMETER PROTECTION

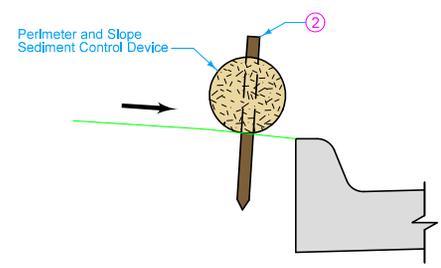

PERIMETER CONTROL ALONG CURB

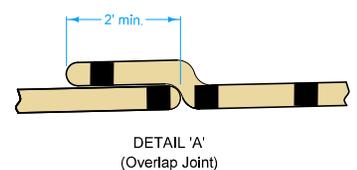

DETAIL 'A'
(Overlap Joint)

LEGEND	
	Contour Lines
	Flow
	Wood Stake ²

Not intended for use in perennial or intermittent streams.
 Ensure ground surface is smooth in order to provide continuous contact with Perimeter and Slope Sediment Control Device. Minor ground shaping may be required. Minor ground shaping is incidental to Perimeter and Slope Sediment Control Device.


- 1 Place devices continuously up to 60 feet. Overlap joints per Detail 'A'. Turn the lower 10 feet of each run up the slope to help contain runoff. When placed such that runoff is conveyed along the device, additional run-ups and/or means may be required to reduce erosion along the device.
- 2 Space stakes as follows:
 - Filter socks: 2" X 2" nominal wood stakes at 10 foot maximum spacing.
 - Wood Excelsior Logs and Straw Wattles: 1" X 1" nominal wood stakes at 4 foot maximum spacing.

Filter Sock Equivalency Table	
Filter Sock Diameter	Wood Excelsior Log or Straw Wattle Diameter
8 inch	9 inch
12 inch	12 inch
18 inch	20 inch

Possible Contract Items:
 Perimeter and Slope Sediment Control Device

Possible Tabulations:
 100-19

 Iowa Department of Transportation	REVISION New 10-16-12
	STANDARD ROAD PLAN
EC-204	
REVISIONS: New. SHEET 1 of 3	
<i>Deanna Macfild</i> APPROVED BY DESIGN METHODS ENGINEER	
PERIMETER AND SLOPE SEDIMENT CONTROL DEVICES	

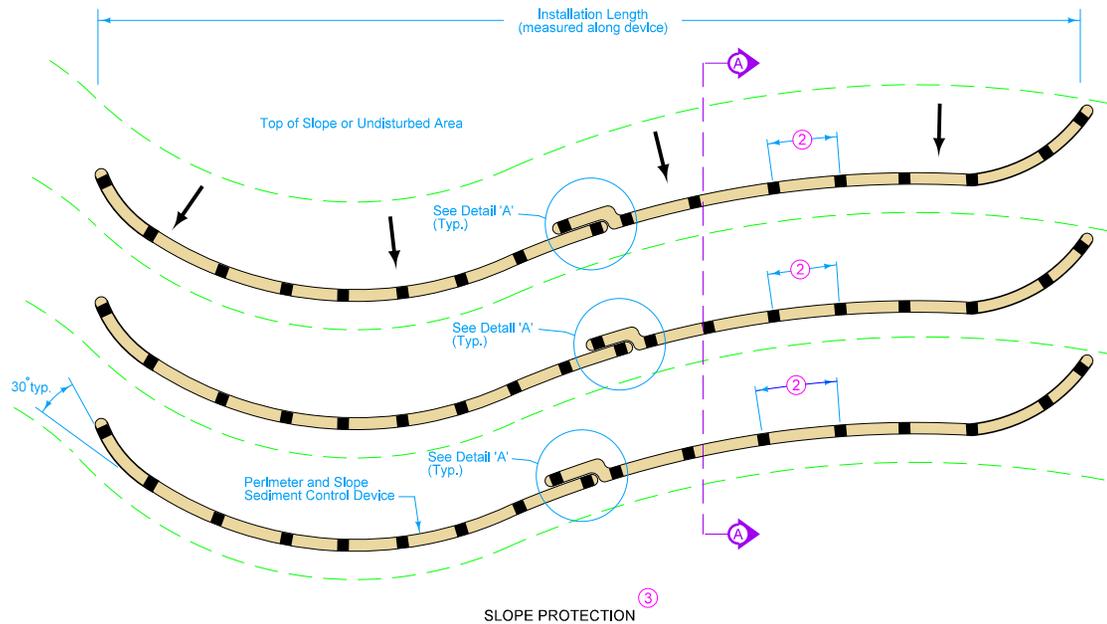


② Space stakes as follows:

Filter Socks: 2" X 2" nominal wood stakes at 10 foot maximum spacing.

Wood Excelsior Logs and Straw Wattles: 1" X 1" nominal wood stakes at 4 foot maximum spacing.

③ Install Slope Protection perpendicular to slope (parallel to contours). Overlap joints per Detail 'A'. Run the last 10 feet of each device up the slope to prevent flow runaround.

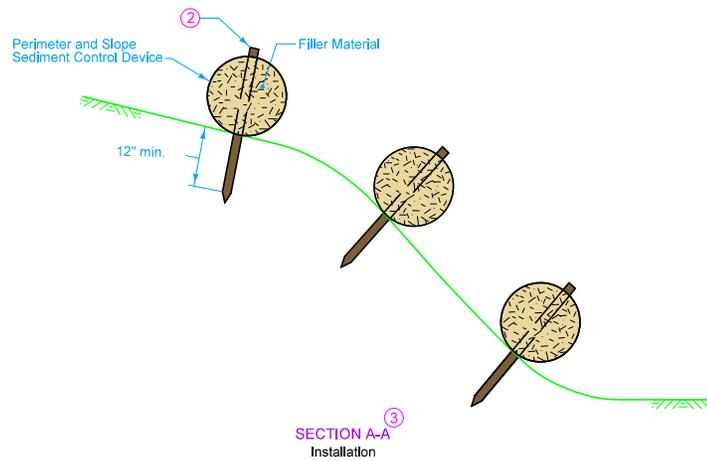


 Iowa Department of Transportation	REVISION
	New 10-16-12
STANDARD ROAD PLAN	EC-204
REVISIONS: New.	SHEET 2 of 3
<i>Deanna Macfild</i> APPROVED BY DESIGN METHODS ENGINEER	
PERIMETER AND SLOPE SEDIMENT CONTROL DEVICES	

④ Space stakes as follows:

Filter Socks: 2" X 2" nominal wood stakes at 5 foot maximum spacing.

Wood Excelsior and Straw Wattles: 1" X 1" nominal wood stakes at 2 foot maximum spacing.

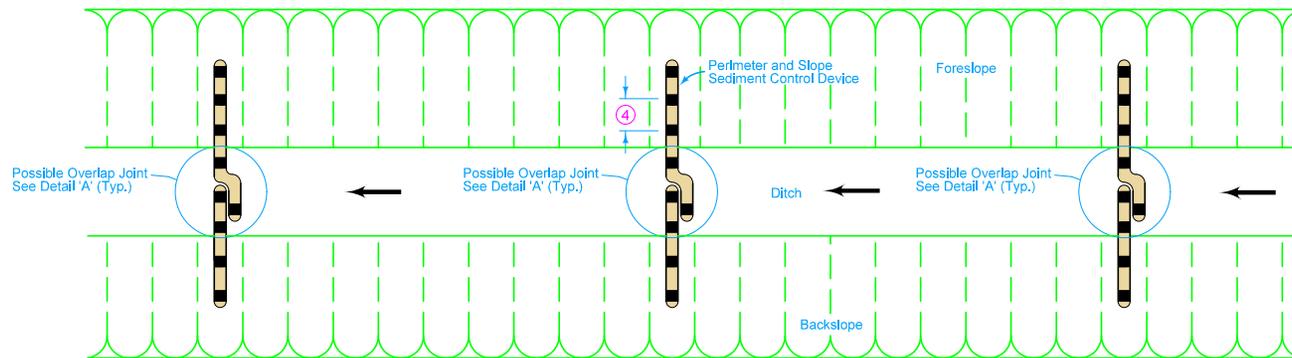

DITCH PROTECTION

 Iowa Department of Transportation	REVISION	
	New	10-16-12
STANDARD ROAD PLAN	EC-204	
	SHEET 3 of 3	
REVISIONS: New.		
<i>Deanna Mufitt</i> APPROVED BY DESIGN METHODS ENGINEER		
PERIMETER AND SLOPE SEDIMENT CONTROL DEVICES		