
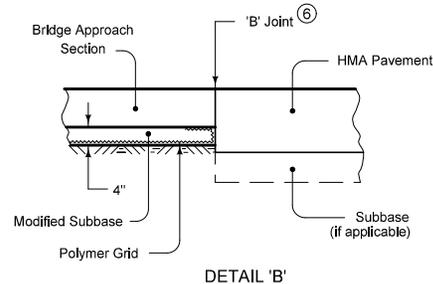
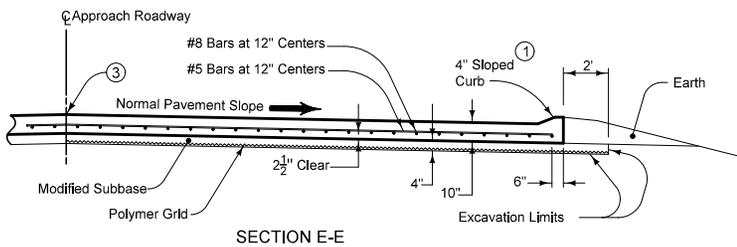


For joint details see PV-101.

- ① Build 4" Sloped Curb to end of Reinforced Bridge Approach Sections. See Curb Location Details (Section B-B).
- ② See RK-19A.
- ③ Longitudinal Joints: (PV-101)
Single Pour - Saw cut joint per detail B.
Two Pours - Use 'KS-1' Joint.
- ④ Excavation limits of Modified Subbase 2' outside of pavement edge; see RK-19A.
- ⑤ Minimum 2 panels, maximum 3 panels; 20' panel length, use 'CD' Joints.
- ⑥ The contractor may be required to saw cut the HMA pavement full depth to accommodate the 'B' joint.
- ⑦ Place 'RD' joint where PCC shoulder, 'B' joint otherwise.

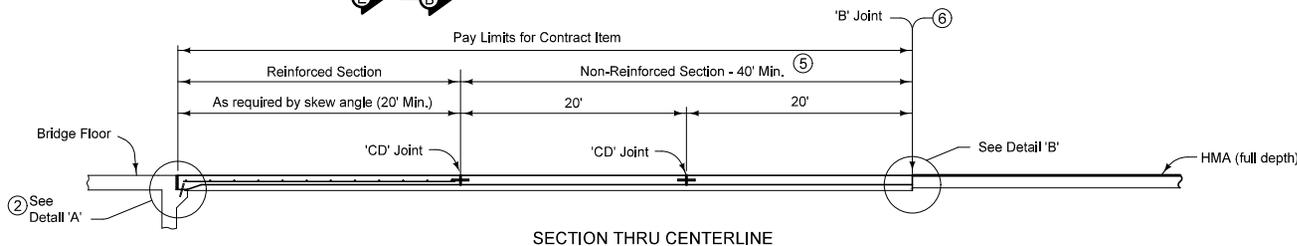

Possible Contract Item:
Bridge Approach, RK-19

 Iowa Department of Transportation	REVISION
	20 10-16-12
STANDARD ROAD PLAN	RK-19J
SHEET 1 of 1	
REVISIONS: Redrew reinforcing mat to place #5 bars on top of #8 bars.	
 Deanna Macfadyen APPROVED BY DESIGN METHODS ENGINEER	
BRIDGE APPROACH SECTION (AT EXISTING BRIDGES, HMA PAVEMENT)	