




PLAN

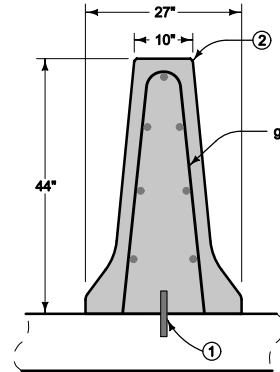


SECTION A-A

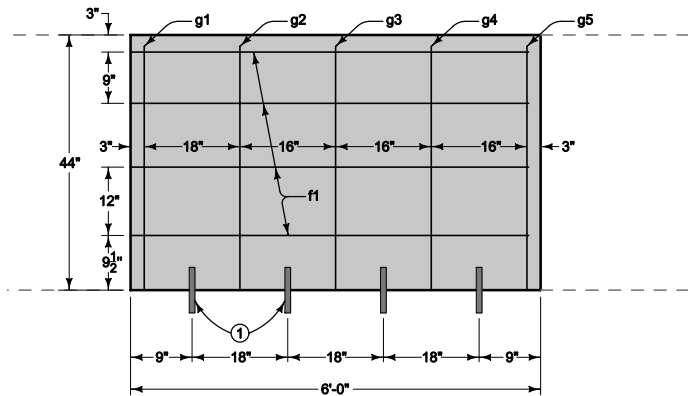

ELEVATION

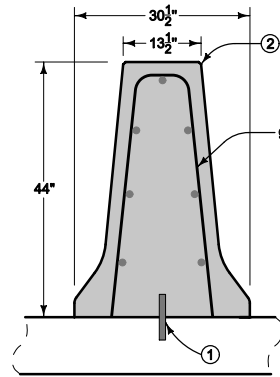


SECTION B-B

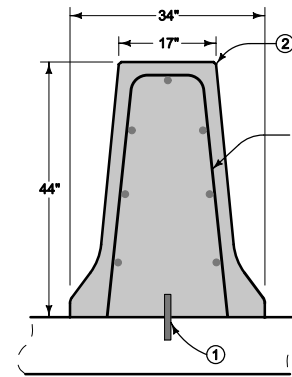


SECTION C-C

Use epoxy-coated grade 60 reinforcing bars. Provide 2 inches minimum cover. Anchor barrier reinforcement to prevent movement. Secure each section at the front, back, and at 3'-6" minimum intervals using a method approved by the Engineer.

- ① Use 1 inch diameter deformed dowel bars of sufficient length to ensure 6 inch minimum embedment in barrier and supporting surface. Install bars either in supporting surface when placed or in drilled holes using polymer grout complying with Materials I.M. 491.11 or hydraulic cement grout complying with Materials I.M. 491.13.
- ② Fillet all exposed corners with a $\frac{3}{4}$ inch dressed and beveled strip.
- ③ Provide 18 inch overlap of reinforcing steel between sections.

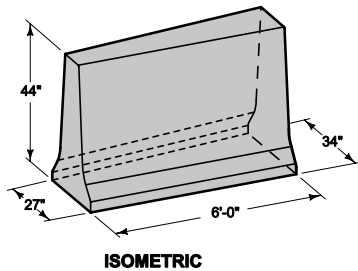

ISOMETRIC



REINFORCING BAR LIST Per Section (6'-0")				
Mark	Size	Number of Bars	Length	Weight (lbs.)
f1	5	7	89"	42
g1	5	1	87"	8
g2	5	1	89"	8
g3	5	1	91"	8
g4	5	1	92"	8
g5	5	1	94"	8

Possible Contract Item:
Concrete Barrier, BA-101

Possible Tabulation:
108-18

 Iowa Department of Transportation	REVISION
	New 04-20-10
STANDARD ROAD PLAN	BA-101
REVISIONS: New. Replaces RE-44B.	SHEET 1 of 1
<i>Deanna Maifield</i> APPROVED BY DESIGN METHODS ENGINEER	
44" CONCRETE MEDIAN BARRIER WIDTH TRANSITION	