

Price bid for "Bridge End Drain, RF-38" is full compensation for furnishing, installing, and constructing the Bridge End Drain as shown.


- ① Refer to [RK-20](#), [RK-25](#), [RK-26](#), or [RK-27](#) for details of 4 inch sloped curb.
- ② Continue 4 inch Sloped Curb 5 feet beyond centerline of intake, then transition to no curb as shown on [PV-102](#).
- ③ Install modified subbase and polymer grid under P.C.C. shoulder panels. See Section A-A ([RK-20](#), [RK-25](#), [RK-26](#) or [RK-27](#)) or Section C-C ([RK-23](#)).
- ④ DI-1 and DI-2 distances measured from center of bolt hole pattern. Locate center of intake 6 feet or more from the nearest transverse pavement joint and between guardrail posts to allow for storm sewer outlet. Joints are determined by the bridge approach section.

Possible Contract Items:
 Bridge End Drain, RF-38
 Paved Shoulder, Portland Cement Concrete (Paved Shoulder Panel for Bridge-End Drain)


Incidental to Paved Shoulder:
 Modified Subbase
 Polymer Grid

Possible Tabulation:
 104-8


 Iowa Department of Transportation	REVISION	
	13	10-15-13
	STANDARD ROAD PLAN	
RF-38		SHEET 1 of 5
<small>REVISIONS: Removed reference to RK-20 in PLAN view on page 1. Removed SECTION A-A on page 1. Modified circle notes.</small>		
 <small>APPROVED BY DESIGN METHODS ENGINEER</small>		
INTAKE FOR BRIDGE END DRAIN		

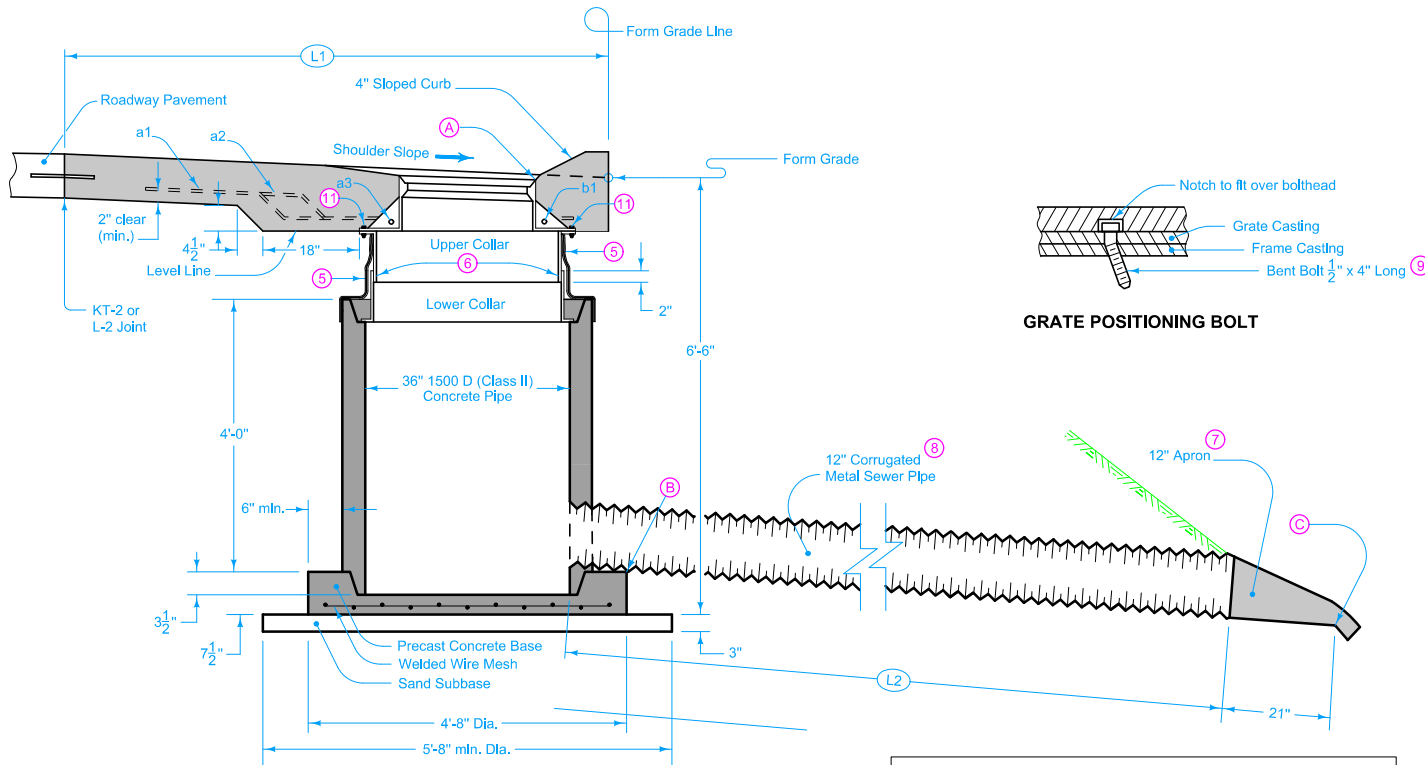


SECTION A-A THROUGH INTAKE

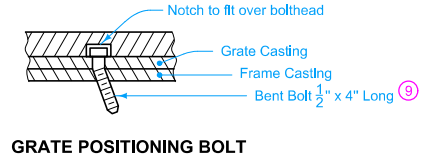

GRATE POSITIONING BOLT

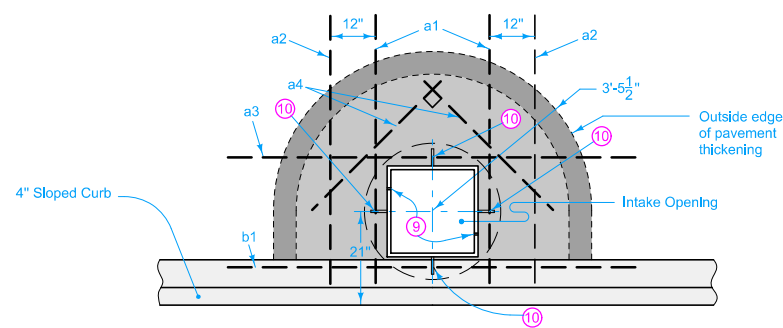

REINFORCING LAYOUT

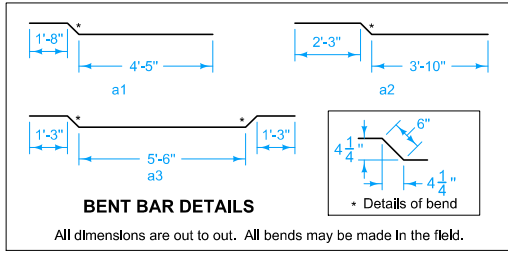

BENT BAR DETAILS
All dimensions are out to out. All bends may be made in the field.

REINFORCING BAR LIST						
MARK	SIZE	LOCATION	SHAPE	NO.	LENGTH	WEIGHT
a1 (10)	4	Shoulder		2	6'-7"	9
a2	4	Shoulder		2	6'-7"	9
a3 (10)	4	Shoulder		1	9'-0"	6
a4	4	Shoulder		2	4'-0"	5
b1 (10)	4	Curb		1	8'-9"	6
Total						35 lbs.

Construct precast base using 4 in. x 4 in. No. 6 steel wire mesh reinforcing or equivalent.

To ensure water-tight joints, use an approved asphaltic sealer for all corrugated metal pipe joints constructed using connecting bands.

Flow line (A) elevation is 0.10 feet below Form Grade Elevation.

Flow line (B) elevation is 5.75 feet below flow line (A).

Flow line (C) elevation is 0 - 0.5 feet above ditch grade.

Refer to project plans for actual flow line elevations of (A), (B), (C), and dimensions L1 and L2.

(5) Before backfilling around the intake assembly, wrap two thicknesses of engineering fabric around the settlement collar. Tape all the way around with 2 inch duct tape immediately below the flange of upper section and 4 inches below the top of well pipe.

(6) Fasten Slip joint temporarily with four 1/2 inch cap screws during pavement construction. Remove cap screws after pavement is hardened.

(7) Refer to RF-5.

(8) Connect to basin according to Section 2435 of the Standard Specifications.

(9) Field place 1/2 in. x 4 in. long bolt in upstream side and bend underside to prevent removal.

(10) Place bars a1, a3, and b1 through the appropriate holes in the intake frame.

(11) Fasten frame casting to Upper Collar casting at four locations using 1/2 in. x 2 in. long hex bolts and 1/2 inch nuts.

Iowa Department of Transportation

STANDARD ROAD PLAN

REVISION
13 10-15-13

RF-38


SHEET 2 of 5

REVISIONS: Removed reference to RK-20 In PLAN view on page 1. Removed SECTION A-A on page 1. Modified circle notes.

APPROVED BY DESIGN METHODS ENGINEER


INTAKE FOR BRIDGE END DRAIN

Minimum Weight = 90 lbs.

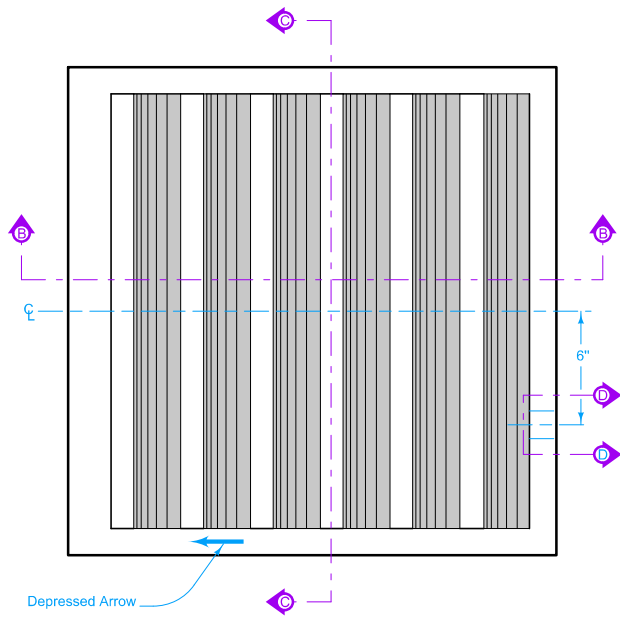


PLAN


← Flow

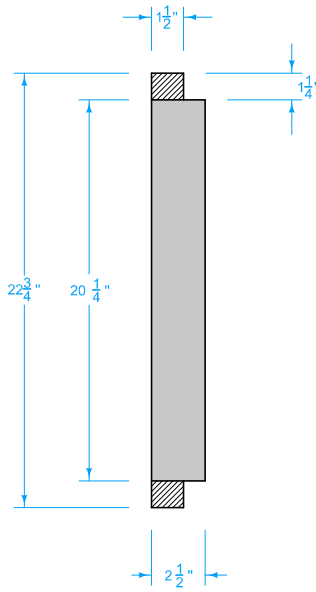


SECTION C-C




SECTION D-D

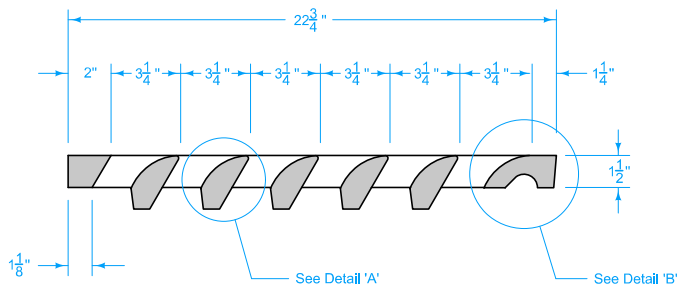

SECTION B-B




DETAIL 'A'




DETAIL 'B'

GRATE


<p>Iowa Department of Transportation</p>	REVISION	
	13	10-15-13
STANDARD ROAD PLAN	RF-38	
SHEET 3 of 5		
<small>REVISIONS: Removed reference to RK-20 In PLAN view on page 1. Removed SECTION A-A on page 1. Modified circle notes.</small>		
<small>APPROVED BY DESIGN METHODS ENGINEER</small>		
INTAKE FOR BRIDGE END DRAIN		

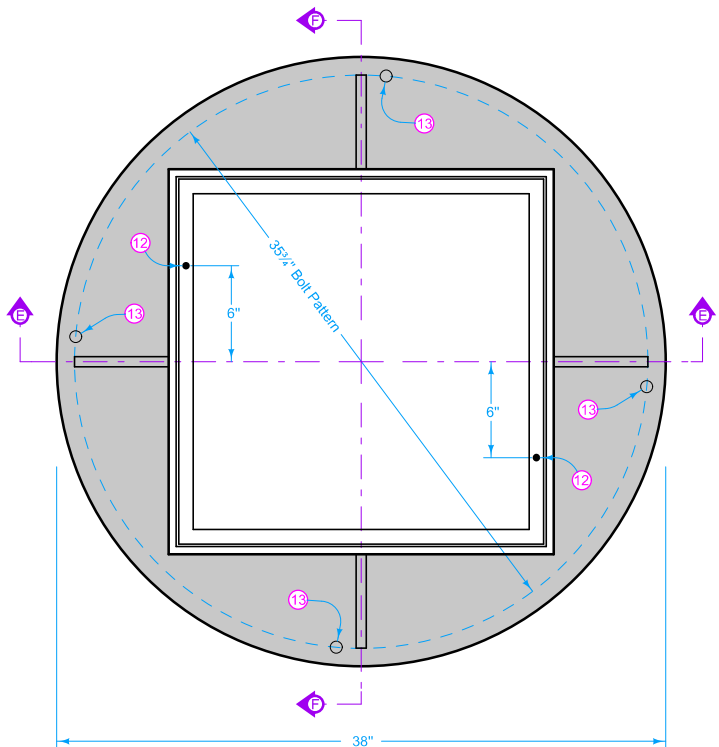

PLAN

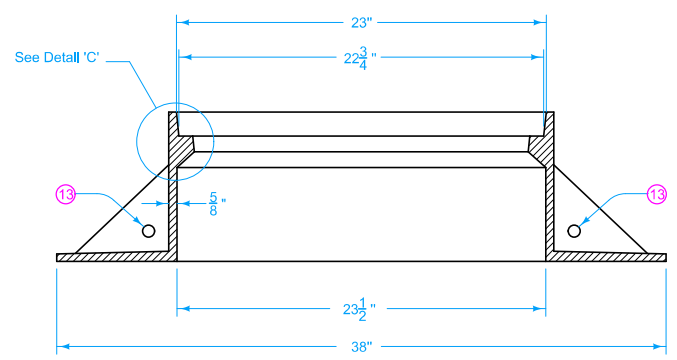


SECTION E-E

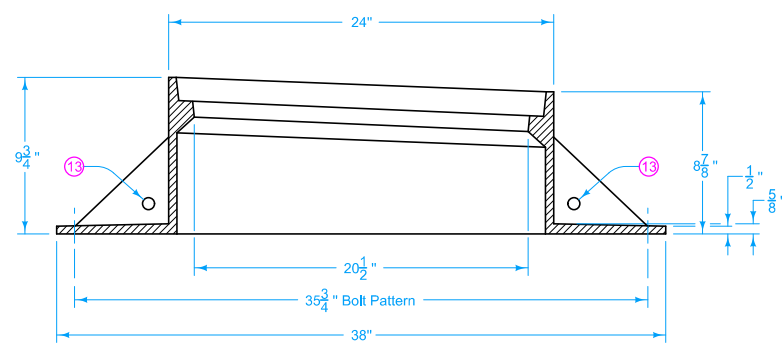

SECTION F-F

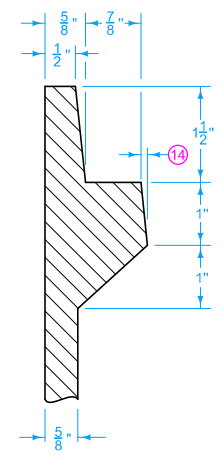

FRAME




DETAIL 'C'



Minimum Weight = 210 lbs.

- 12 Provide $\frac{9}{16}$ inch diameter holes at locations indicated.
- 13 Drill or Core $\frac{3}{4}$ inch holes.
- 14 DRAFT (Small Casting Taper) will be permitted.

 Iowa Department of Transportation	REVISION	
	13	10-15-13
STANDARD ROAD PLAN		RF-38
		SHEET 4 of 5
<small>REVISIONS: Removed reference to RK-20 In PLAN view on page 1. Removed SECTION A-A on page 1. Modified circle notes.</small>		
 <small>APPROVED BY DESIGN METHODS ENGINEER</small>		
INTAKE FOR BRIDGE END DRAIN		

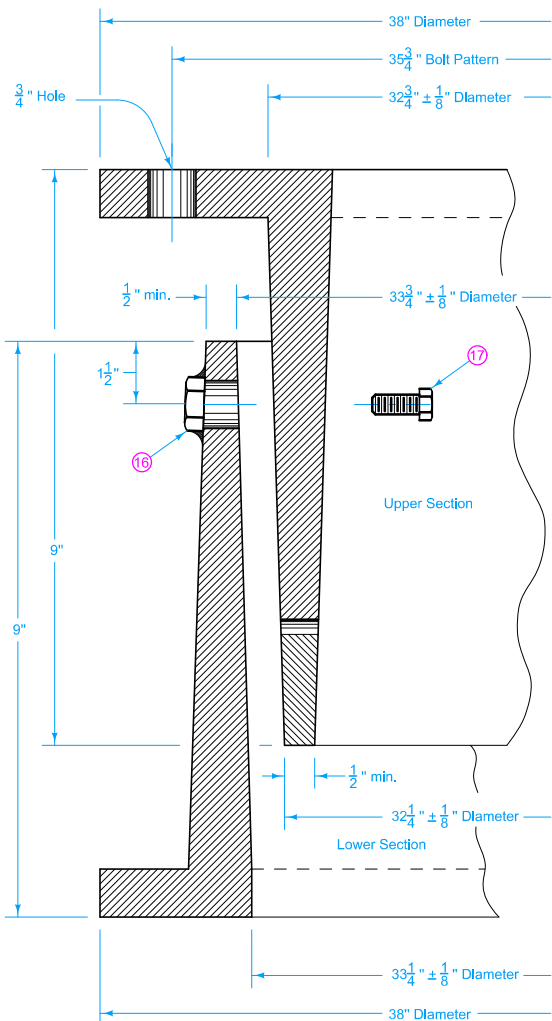

SETTLEMENT COLLAR

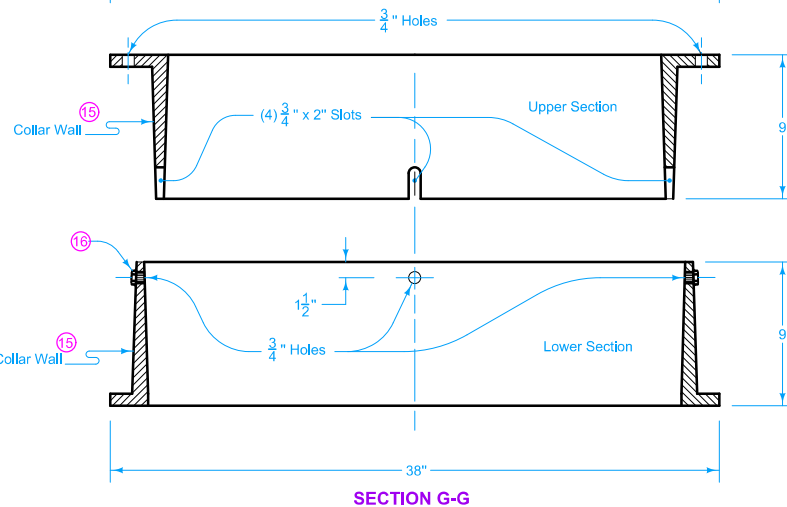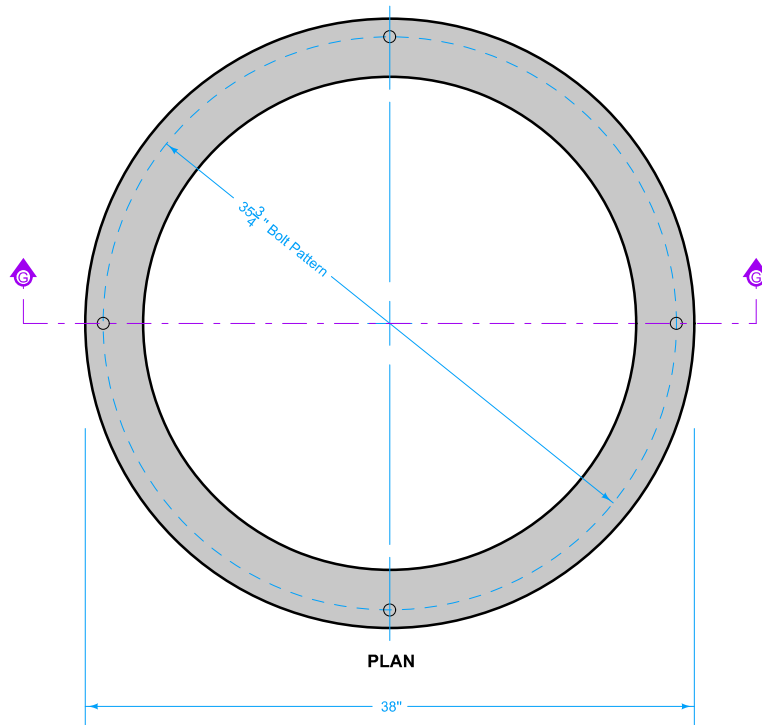

- 15 Wall thickness may vary uniformly from base to the top or bottom of the casting.
- 16 Tack weld four $\frac{1}{2}$ inch nuts to outside of bottom settlement collar or drill and tap four holes for $\frac{1}{2}$ inch Cap Screws in bottom settlement collar.
- 17 Remove the four $\frac{1}{2}$ inch Cap Screws after surrounding concrete has set.

MINIMUM WEIGHT	
Upper Section	210 lbs.
Lower Section	210 lbs.

 Iowa Department of Transportation	REVISION
	13 10-15-13
STANDARD ROAD PLAN	RF-38
	SHEET 5 of 5
<small>REVISIONS: Removed reference to RK-20 In PLAN view on page 1. Removed SECTION A-A on page 1. Modified circle notes.</small>	
 <small>APPROVED BY DESIGN METHODS ENGINEER</small>	
INTAKE FOR BRIDGE END DRAIN	