




SECTION A-A

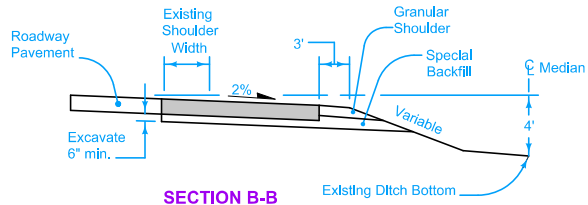


SECTION B-B

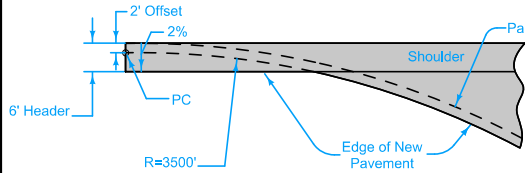


DETAIL 'A'

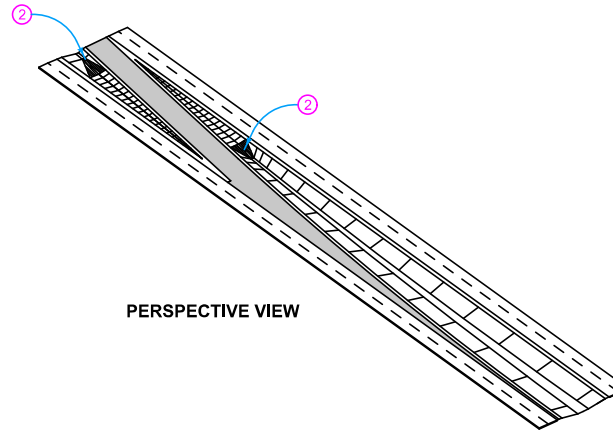

PERSPECTIVE VIEW

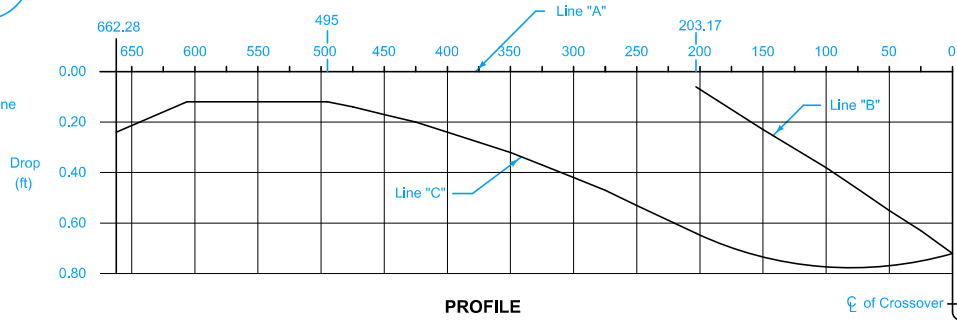

PROFILE

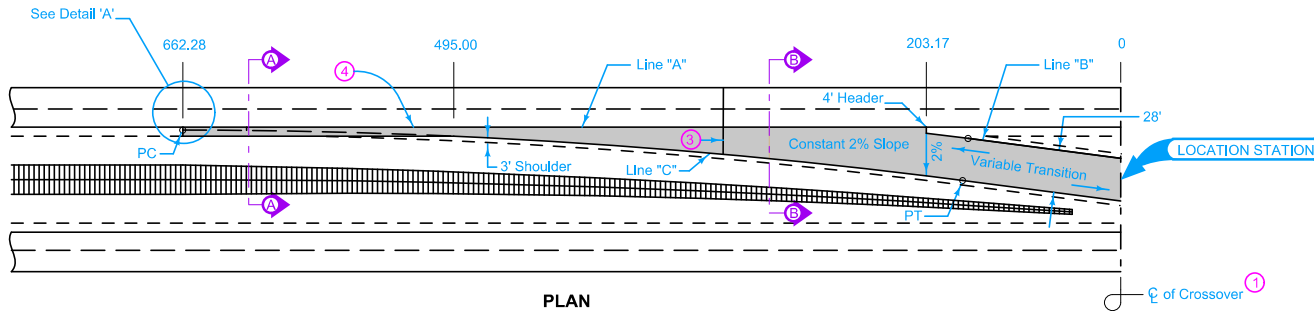

PLAN

TABLE OF OFFSETS AND DROPS																							
Distance (Feet)	662.28	625	600	575	525	495	475	450	425	400	375	350	325	300	275	250	203.17	150	100	75	50	25	0
Offset A to C (Feet)	6.00	6.00	6.00	6.00	6.00	6.00	7.01	8.44	10.05	11.84	13.81	15.96	18.29	20.80	23.49	26.37	32.24	39.69	47.46	51.61	55.81	60.00	64.19
Drop A to C (Feet)	0.24	0.16	0.12	0.12	0.12	0.12	0.14	0.17	0.20	0.24	0.28	0.32	0.37	0.42	0.47	0.53	0.64	0.73	0.77	0.78	0.77	0.75	0.72
Drop A to B (Feet)																	0.08	0.23	0.38	0.46	0.55	0.63	0.72

Detour Pavement options: 9" PCC or 12" HMA

For joint details, see PV-101.

- ① Median crossover is symmetrical about centerline.
- ② Median pipe for crossover. See Detail 500-19.
- ③ For PCC Detour Pavement, match existing roadway joints. 'CD' joints are required.
- ④ 'KT-2' or 'L-2' joint if mainline pavement is new construction. Bend bars out.  
'BT-3' joint if mainline pavement is existing.  
'B' joint if Detour Pavement is HMA.

DESIGN QUANTITY TABLE		
Detour Pavement Sq. Yds.	Special Backfill Tons	Granular Shoulder Tons
2610	1115	*305

\*Quantity based on 8" shoulder depth.



Possible Contract Items:

- Detour Pavement
- Embankment In Place
- Excavation, Class 10, Roadway and Borrow
- Excavation, Class 13, Roadway and Borrow
- Granular Shoulder, Type A
- Removal of Pavement
- Special Backfill

Possible Tabulation:

112-8

 Iowa Department of Transportation	REVISION
	New 4-15-14
<b>STANDARD ROAD PLAN</b>	<b>PV-514</b>
REVISIONS: New.	SHEET 1 of 1
 APPROVED BY DESIGN METHODS ENGINEER	
<b>MEDIAN CROSSOVER</b> <b>(100' MEDIAN)</b> <b>28' WIDE 2 LANE</b>	