




REVISED 08-2022: UPDATED BRIDGE ENGINEER SIGNATURE, REVISED SUPERSTRUCTURE NOTES TO STATE "SLAB FALSEWORK SHALL BE REMOVED PRIOR TO CONSTRUCTION OF THE BARRIER RAILS, UNLESS SLAB CONSTRUCTION IS STAGED." CHANGED PAVING BLOCK LIFTING BAR MARK (WAS 5x1).

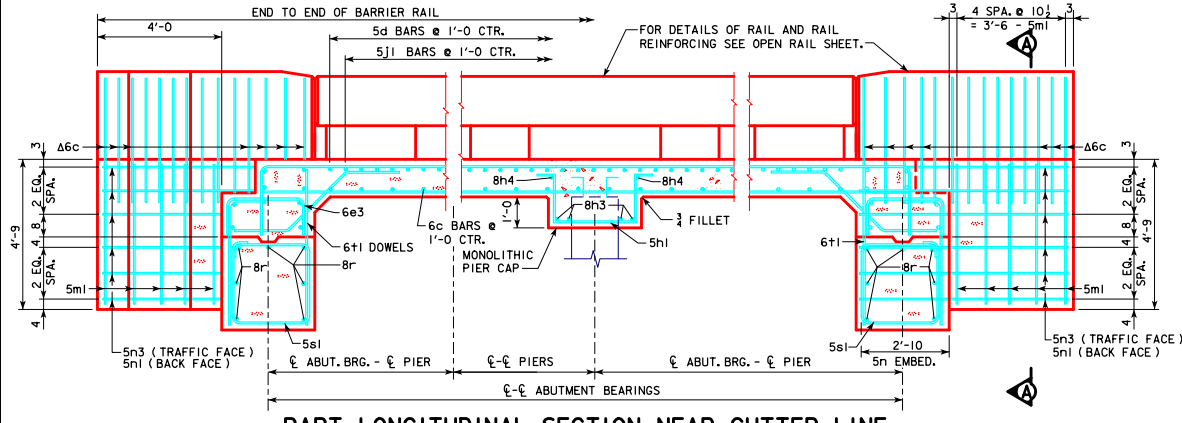


PART LONGITUDINAL SECTION NEAR GUTTER LINE

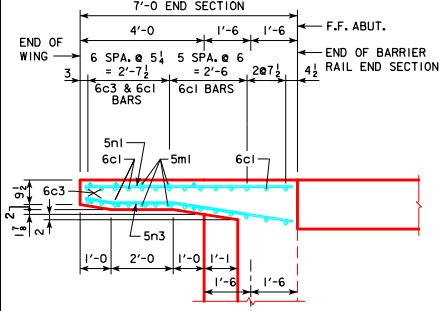


PART PLAN 0° SKEW
(RAILING NOT SHOWN)

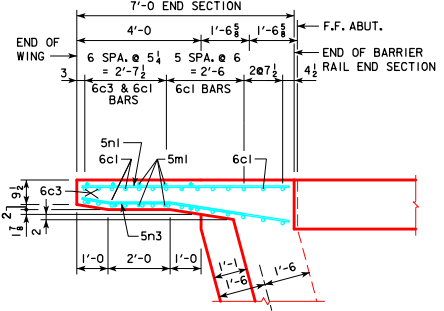


PART PLAN 15° SKEW
(RAILING NOT SHOWN)

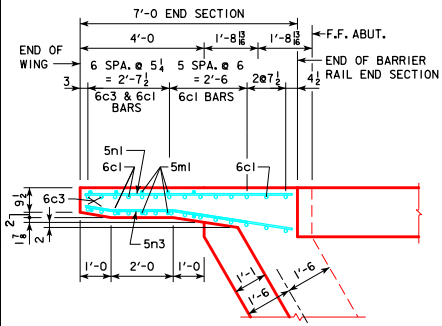

PART PLAN 30° SKEW
(RAILING NOT SHOWN)

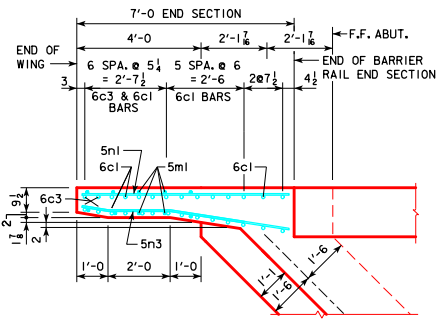

PART PLAN 45° SKEW
(RAILING NOT SHOWN)




SECTION A-A

NOTE: SEE OPEN BARRIER RAIL DETAILS IN THESE PLANS FOR DETAILS OF BARRIER RAIL END SECTION.
NOTE: 5m1, 5n1, & 5n3 BARS ARE INCLUDED IN SUPERSTRUCTURE BAR LIST. 6c, 6d & 4t1 BARS ARE INCLUDED IN BARRIER RAIL BAR LIST.


SUPERSTRUCTURE NOTES:
THIS BRIDGE IS DESIGNED FOR HL-93 LOADING PLUS AN ALLOWANCE OF 20 POUNDS PER SQUARE FOOT OF ROADWAY FOR FUTURE WEARING SURFACE.
THE SLAB AS SHOWN INCLUDES A 1/2 INCH INTEGRAL WEARING SURFACE.
THE MINIMUM CLEAR DISTANCE FROM FACE OF CONCRETE TO NEAR REINFORCING BAR SHALL BE 2 INCHES UNLESS OTHERWISE NOTED OR SHOWN. ALL REINFORCING STEEL IS TO BE SECURELY WIRED IN PLACE. SEE "BAR CHAIR NOTE".
ALL REINFORCING SHALL BE GRADE 60.

THE CONCRETE SLAB IS TO BE PLACED WITH A MINIMUM OF CONSTRUCTION JOINTS. PROCEDURES FOR PLACING SLAB CONCRETE SHALL BE SUBMITTED FOR APPROVAL TOGETHER WITH A STATEMENT OF THE PROPOSED METHOD AND EVIDENCE THAT THE CONTRACTOR POSSESSES THE NECESSARY EQUIPMENT AND FACILITIES TO ACCOMPLISH THE REQUIRED RESULT. SLAB FALSEWORK SHALL BE REMOVED PRIOR TO CONSTRUCTION OF THE BARRIER RAILS, UNLESS SLAB CONSTRUCTION IS STAGED.
NOTE THAT WHEN PORTLAND CEMENT APPROACH PAVEMENT IS PLACED, COMPRESSIBLE JOINT MATERIAL MUST BE USED BETWEEN PAVEMENT AND END OF BRIDGE.


BAR CHAIR NOTE:
TOP MAT OF REINFORCING STEEL IS TO BE SUPPORTED BY INDIVIDUAL BAR CHAIRS SPACED AT NOT MORE THAN 3'-0 CENTERS LONGITUDINALLY AND TRANSVERSELY. THE BOTTOM MAT OF REINFORCING STEEL IS TO BE SUPPORTED BY INDIVIDUAL BAR CHAIRS SPACED AT NOT MORE THAN 3'-0 CENTERS LONGITUDINALLY AND TRANSVERSELY, OR BY CONTINUOUS ROWS OF BAR HIGH CHAIRS OR SLAB BOLSTERS SPACED 4'-0 APART. I.M. 451.01 REQUIREMENTS SHALL APPLY FOR BAR CHAIRS, BAR HIGH CHAIRS, AND SLAB BOLSTERS.

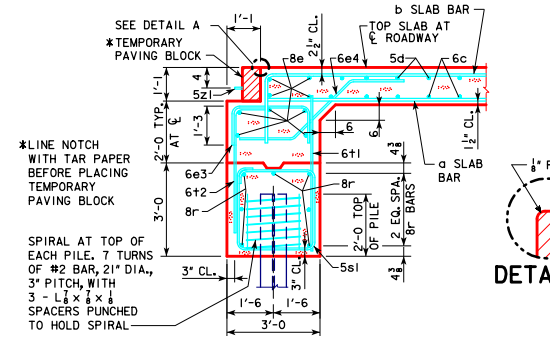

SECTION NORMAL TO ABUTMENT AT C
(BRIDGE LENGTHS 70'-110')

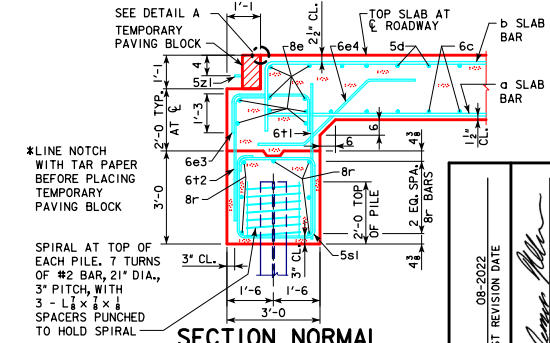

SECTION NORMAL TO ABUTMENT AT C
(BRIDGE LENGTHS 120'-0 - 150'-0')

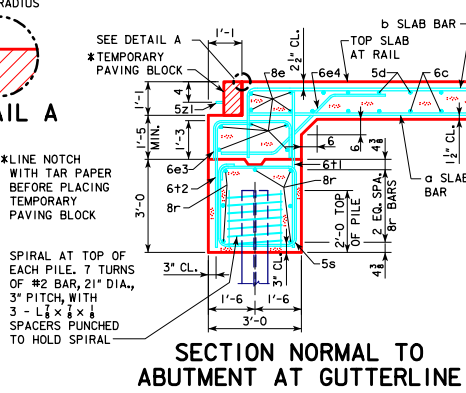

SECTION NORMAL TO ABUTMENT AT GUTTERLINE

08-2022 LATEST REVISION DATE APPROVED BY BRIDGE ENGINEER 	 STANDARD DESIGN - 24'-0 ROADWAY, 3 SPAN BRIDGES CONTINUOUS CONCRETE SLAB BRIDGES NOVEMBER, 2006	
	SUPERSTRUCTURE DETAILS ALL BRIDGES	J24-20-06