



Centerline rumble strip placement is the same regardless of centerline pavement marking.


Gap areas where painted median is present.

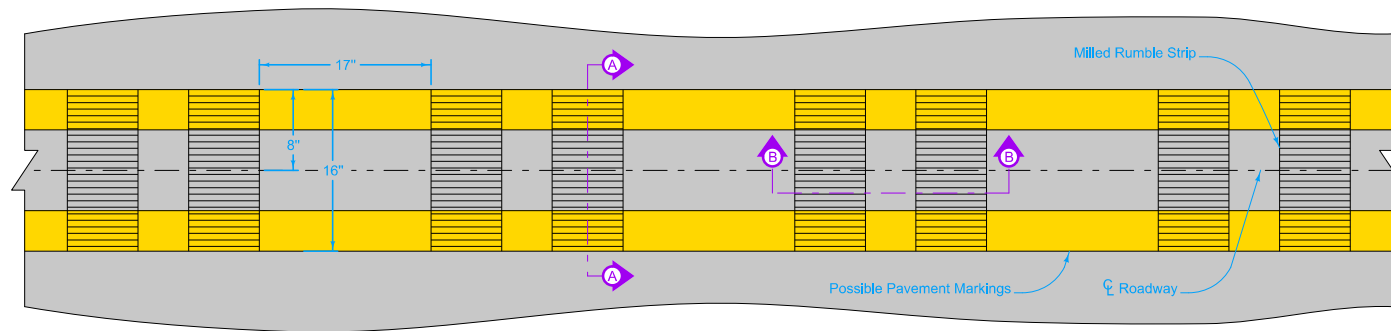

PLAN



SECTION A-A




SECTION B-B


Possible Contract Items:
 Milled Centerline Rumble Strips, HMA Surface
 Milled Centerline Rumble Strips, PCC Surface

Possible Tabulation:
 112-10

	REVISION
	2 04-21-15
STANDARD ROAD PLAN	PV-13
SHEET 1 of 2	
REVISIONS: Modified side road detail and added circle note 1 on page 2.	
APPROVED BY DESIGN METHODS ENGINEER	
MILLED CENTERLINE RUMBLESTRIPS	

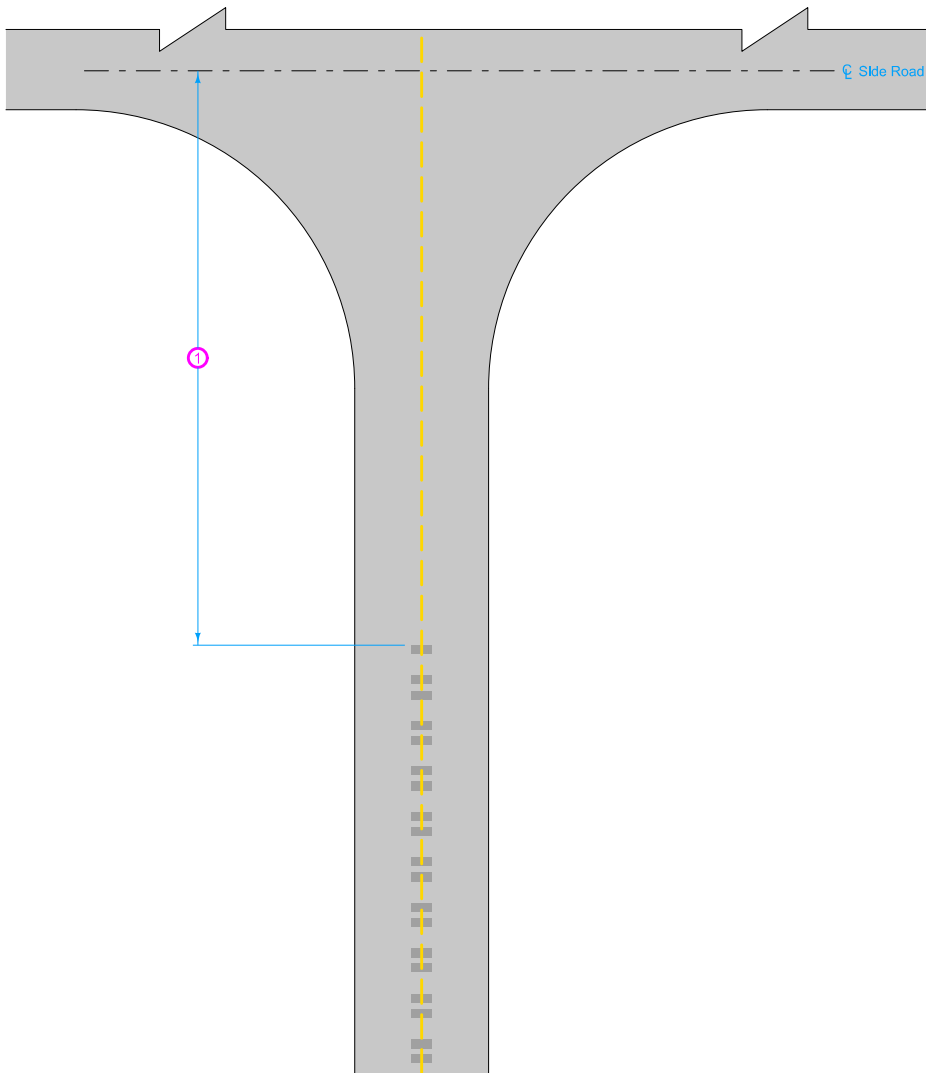



INTERSECTION WITH
SIDE ROAD

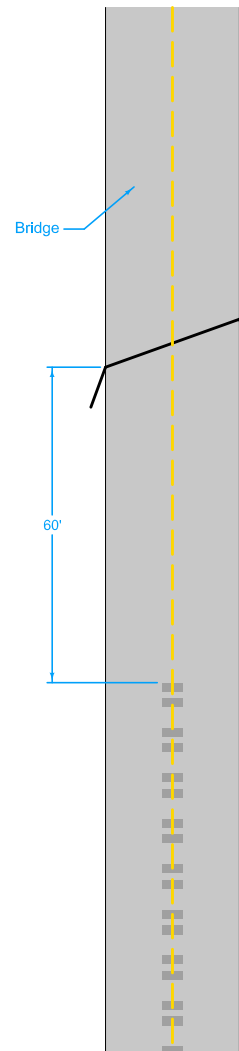

BRIDGE APPROACH

① 180 feet for paved slide roads. 75 feet for granular slide roads

	REVISION	
	2	04-21-15
STANDARD ROAD PLAN PV-13	SHEET 2 of 2	
	REVISIONS: Modified slide road detail and added circle note 1 on page 2.	
 APPROVED BY DESIGN METHODS ENGINEER		
MILLED CENTERLINE RUMBLESTRIPS		