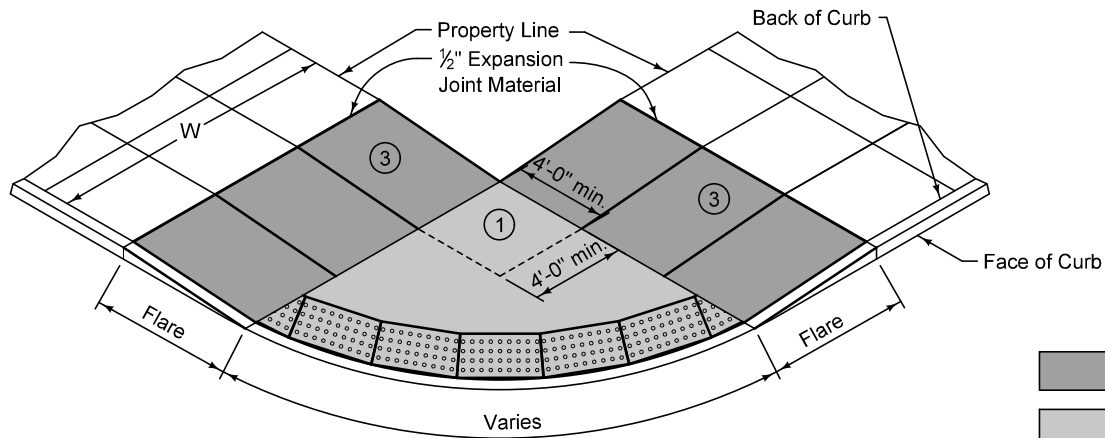






CLASS A SIDEWALK CURB RAMP

- ① Turning Space: Target slope of 1.5% with maximum slope perpendicular to the travel direction of 2.0%. Minimum 4 feet by 4 feet (turning spaces may overlap).
- ② Perpendicular Curb Ramp: Target running slope of 6.25% with maximum running slope of 8.3%.
- ③ Parallel Curb Ramp: Target running slope of 6.25% with maximum running slope of 8.3%. The length of the parallel ramp is not required to exceed 15 feet, regardless of the resulting slope. Do not exceed 8.3% for parallel ramps shorter than 15 feet.



CLASS A SIDEWALK CURB RAMP ALTERNATIVE

Key	
	Curb Ramp
	Turning Space
	Detectable Warning

	REVISION New 10-16-12
	7030.209 SHEET 1 of 1
	SUDAS Standard Specifications
CURB RAMPS FOR CLASS A SIDEWALK	