




SECTION A-A

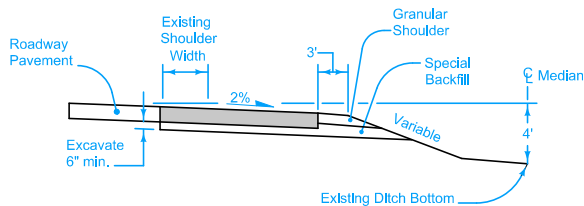


SECTION B-B

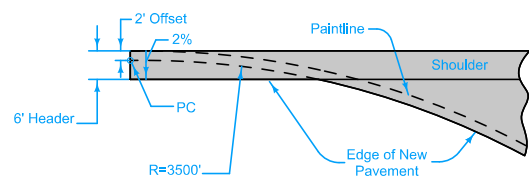


DETAIL 'A'

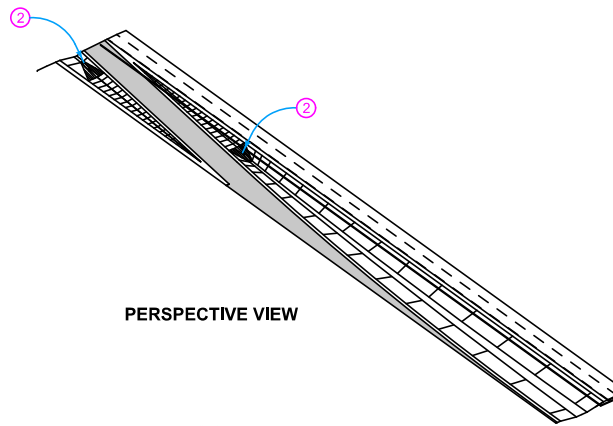

PERSPECTIVE VIEW

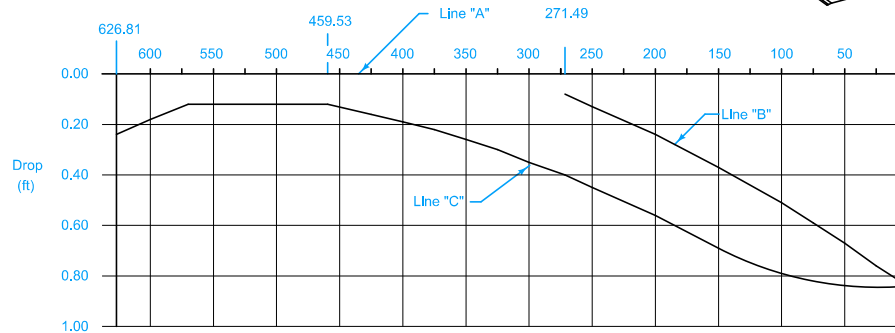

PROFILE

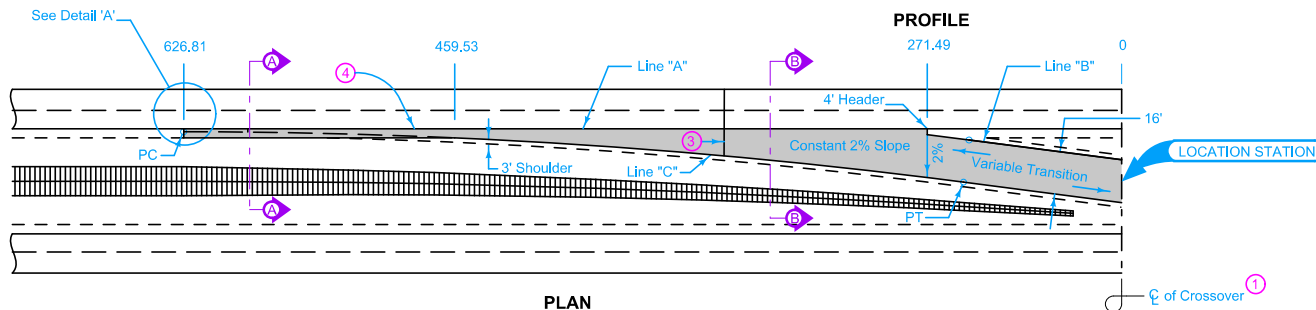

PLAN

TABLE OF OFFSETS AND DROPS

Distance (Feet)	626.81	600	575	550	500	459.53	425	400	375	350	325	300	271.49	250	200	150	100	75	50	25	0	
Offset A to C (Feet)	6.00	6.00	6.00	6.00	6.00	7.82	9.36	11.07	12.96	15.04	17.29	20.08	22.34	28.12	34.63	41.87	45.77	49.85	55.95	58.11		
Drop A to C (Feet)	0.24	0.18	0.13	0.12	0.12	0.12	0.16	0.19	0.22	0.26	0.30	0.35	0.40	0.45	0.56	0.69	0.79	0.82	0.84	0.85	0.84	
Drop A to B (Feet)															0.08	0.13	0.24	0.37	0.51	0.59	0.67	0.84

Detour Pavement options: 9" PCC or 12" HMA

For joint details, see PV-101.

- ① Median crossover is symmetrical about centerline.
- ② Median pipe for crossover. See DR-504.
- ③ For PCC Detour Pavement, match existing roadway joints. 'CD' joints are required.
- ④ 'KT-2' or 'L-2' joint if mainline pavement is new construction. Bend bars out. 'BT-3' joint if mainline pavement is existing. 'B' joint if Detour Pavement is HMA.

DESIGN QUANTITY TABLE		
Detour Pavement Sq. Yds.	Special Backfill Tons	Granular Shoulder Tons
1710	845	*320

*Quantity based on 8" shoulder depth.



Possible Contract Items:

- Detour Pavement
- Embankment In Place
- Excavation, Class 10, Roadway and Borrow
- Excavation, Class 13, Roadway and Borrow
- Granular Shoulder, Type A
- Removal of Pavement
- Special Backfill

Possible Tabulation:
112-8

 STANDARD ROAD PLAN	REVISION
	1 04-21-20
	PV-513
SHEET 1 of 1	

REVISIONS: New logo and modified circle note 2.

APPROVED BY DESIGN METHODS ENGINEER

MEDIAN CROSSOVER
(100' MEDIAN)
16' WIDE 1 LANE