



REVISED 01-10 - ABUT. WINGS\_SHAPE\_CHANGED.

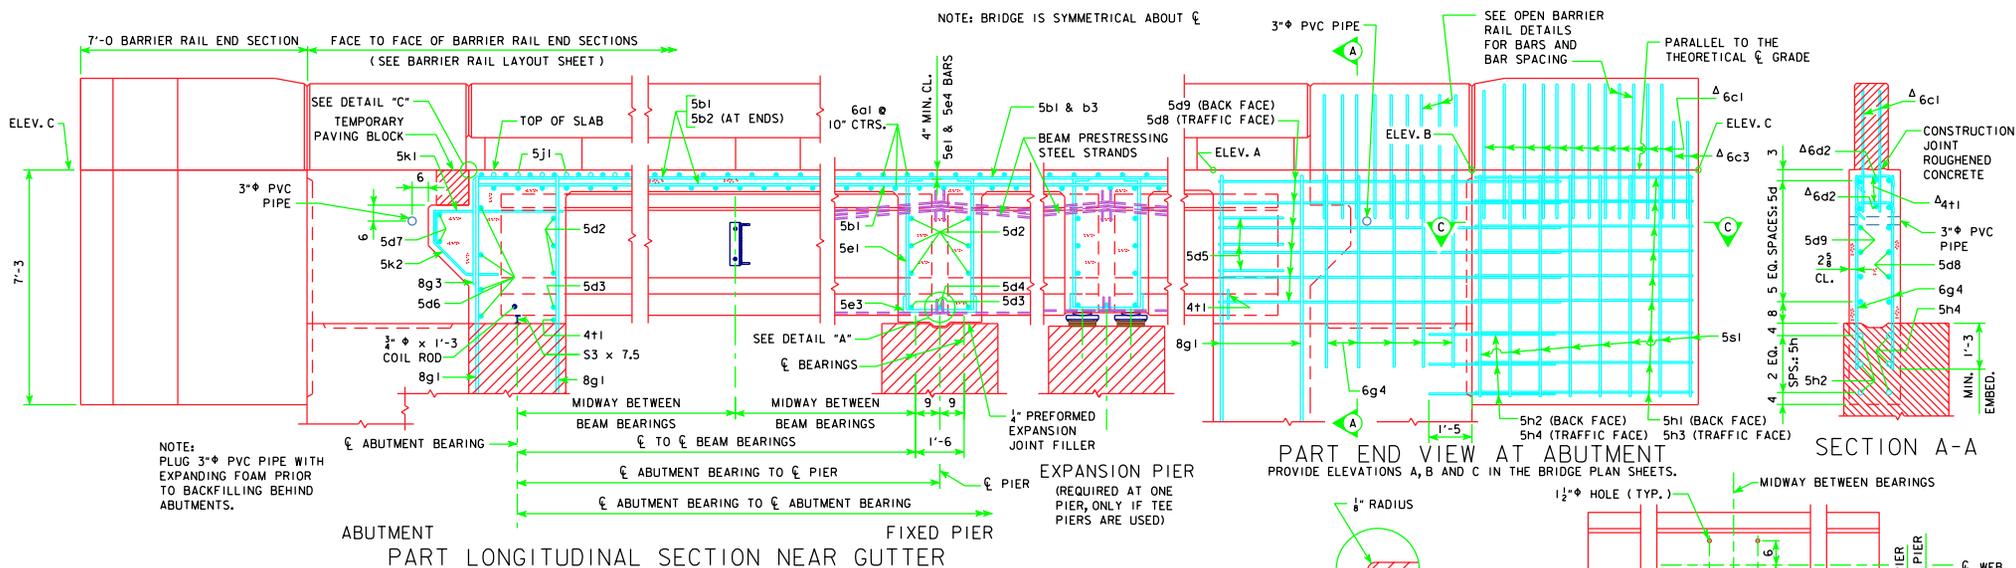


ABUTMENT PART LONGITUDINAL SECTION NEAR GUTTER (FOR DETAILS OF INTERMEDIATE DIAPHRAGM SEE SHEET H24-38-06)

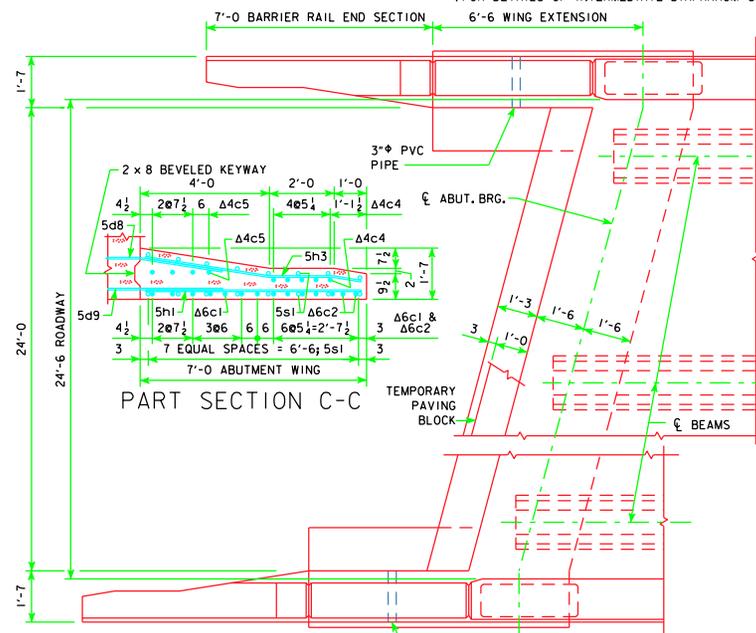


PART SECTION C-C




PART PLAN

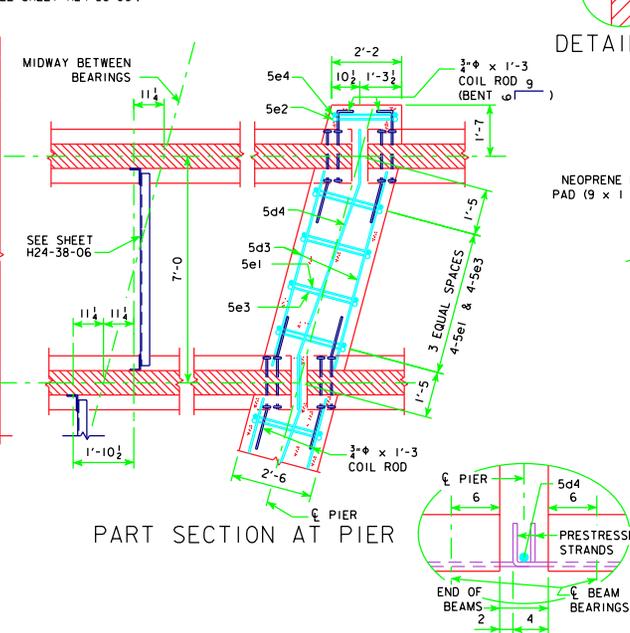


PART SECTION AT PIER




DETAIL "A"

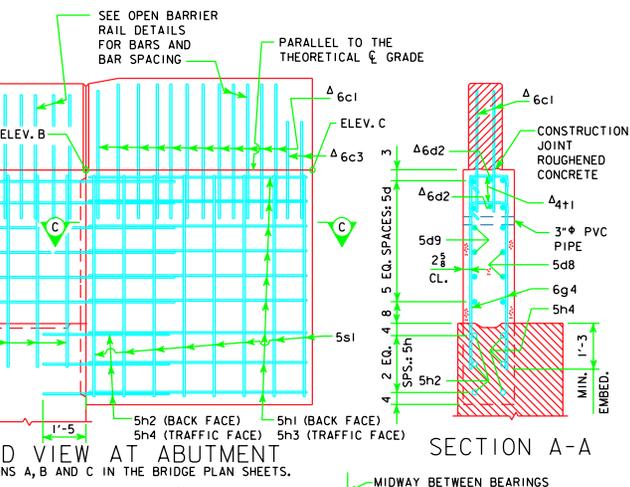


PART END VIEW AT ABUTMENT PROVIDE ELEVATIONS A, B AND C IN THE BRIDGE PLAN SHEETS.



DETAIL "C"

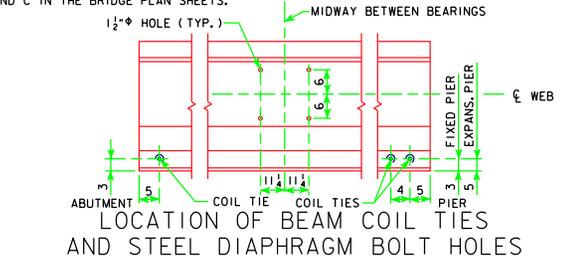

LOCATION OF BEAM COIL TIES AND STEEL DIAPHRAGM BOLT HOLES

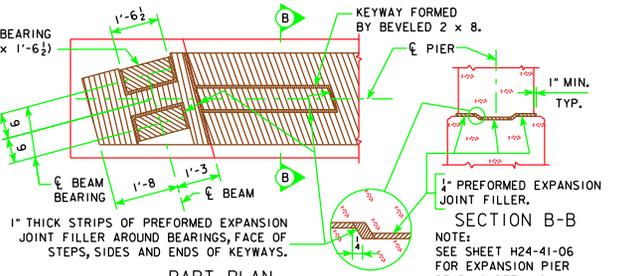

PART PLAN TOP OF FIXED PIER DETAILS

LATEST REVISION DATE 01-10	APPROVED BY BRIDGE ENGINEER <i>Norman C. McQuinn</i>		
		STANDARD DESIGN - 24' ROADWAY, THREE SPAN BRIDGE <b>PRETENSIONED PRESTRESSED CONCRETE BEAM BRIDGES</b> DECEMBER, 2006	
LONGITUDINAL SECTION 15° SKEW C BEAMS		H24-14-06	