


PART LONGITUDINAL SECTION NEAR GUTTER

PART END VIEW AT ABUTMENT


SECTION A-A


NOTE:
PLUG 3" PVC PIPE WITH
EXPANDING FOAM PRIOR
TO BACKFILLING BEHIND
ABUTMENTS.

NOTE:
FOR ELEVATION A, ELEVATION B, ELEVATION C AND
DIMENSION C SEE "MISCELLANEOUS DETAILS"
FOR THE APPROPRIATE LENGTH BRIDGE.

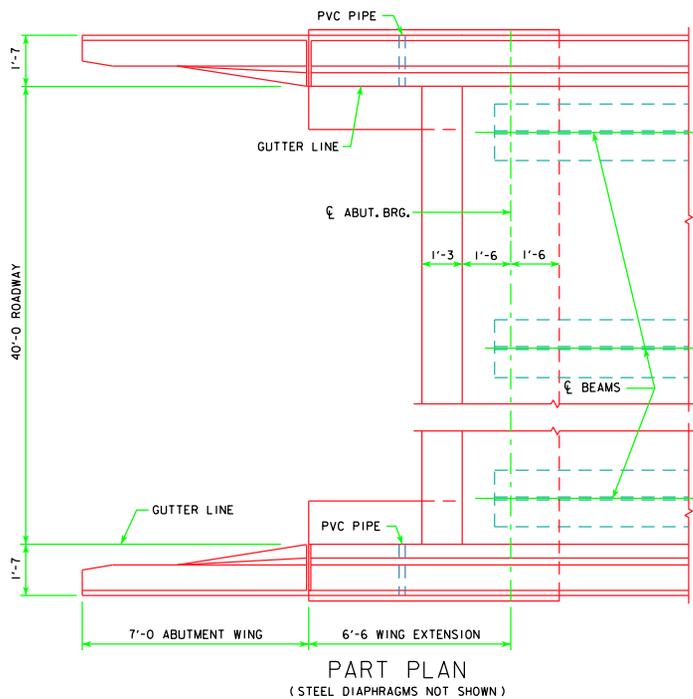

PART PLAN
(STEEL DIAPHRAGMS NOT SHOWN)



LATEST REVISION DATE	 APPROVED BY BRIDGE ENGINEER	 Iowa Department of Transportation Highway Division	
		STANDARD DESIGN - 40' ROADWAY, 3 SPAN BRIDGES ROLLED STEEL BEAM BRIDGES JUNE, 2010	
		LONGITUDINAL SECTION 0° SKEW	RS40-020-10