


PLAN

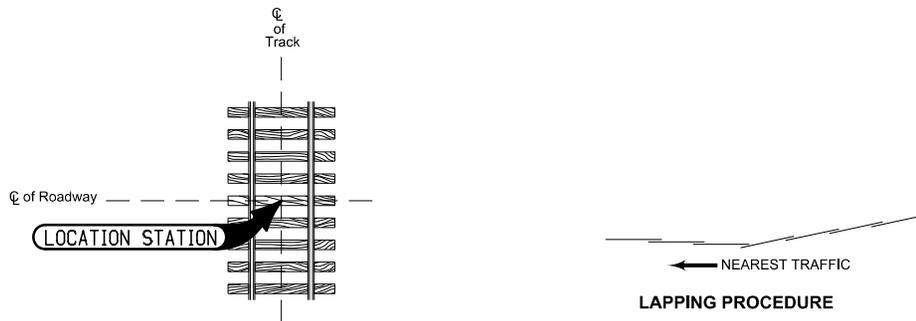

For grading requirements, refer to **EW-301**.

For additional guardrail requirements, refer to **BA-200**.

① Cover entire face of terminal section with alternating black and yellow striped adhesive sheeting. Stripes shall be approximately 3 inches in width and shall be sloped down at an angle of 45 degrees toward the side on which traffic is to pass the end anchorage. Yellow stripes shall meet the retroreflectivity requirements for Type III or Type IV reflective sheeting.

② Refer to **BA-205**.

③ Refer to **BA-204**.

Possible Contract Items:  
 Steel Beam Guardrail End Anchor, Thrie-Beam  
 Steel Beam Guardrail End Terminal

Possible Tabulation:  
**108-8D**

 <b>Iowa Department        of Transportation</b>	<small>REVISION</small> 1   10-18-11
	<b>BA-253</b> <small>SHEET 1 of 1</small>
<b>STANDARD ROAD PLAN</b>	
<small>REVISIONS: Updated references to renamed standards. Modified dimensioning on plan view.</small>	
 <small>APPROVED BY DESIGN METHODS ENGINEER</small>	
<b>STEEL BEAM GUARDRAIL        INSTALLATION AT RAILROAD SIGNAL</b>	