




### GUTTERLINE JOINTING

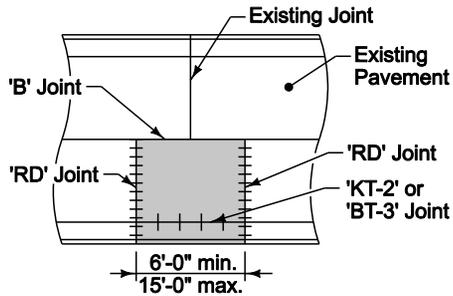

ONE PANEL WIDTH PATCH WITH OPPOSING JOINT

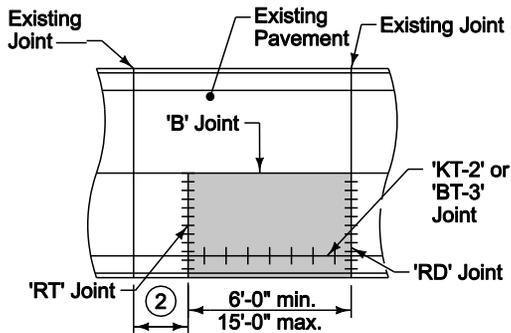


ONE PANEL WIDTH PATCH NO OPPOSING JOINT

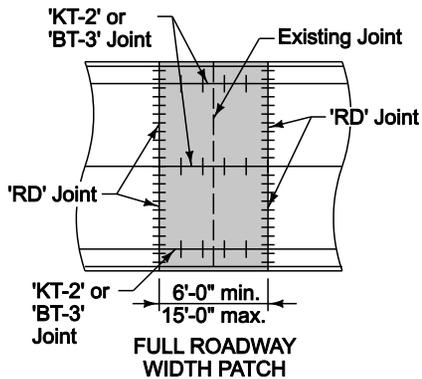


FULL ROADWAY WIDTH PATCH


### THIRD POINT JOINTING ①

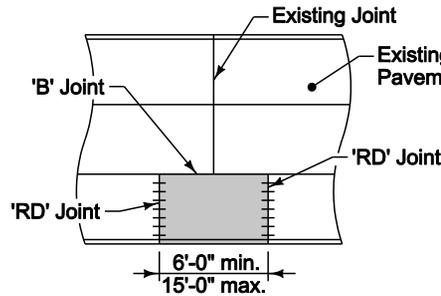


OUTSIDE PANEL PATCH WITH OPPOSING JOINT

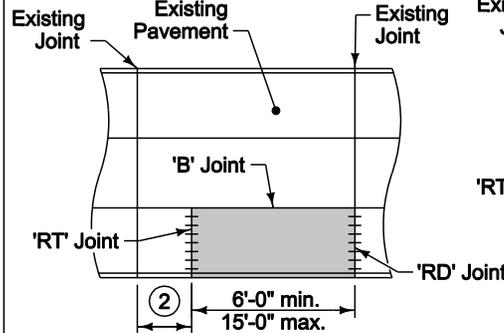


OUTSIDE PANEL PATCH NO OPPOSING JOINT

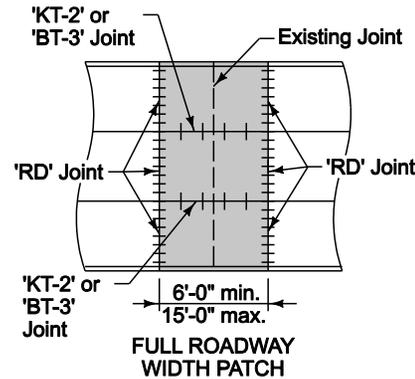


FULL ROADWAY WIDTH PATCH

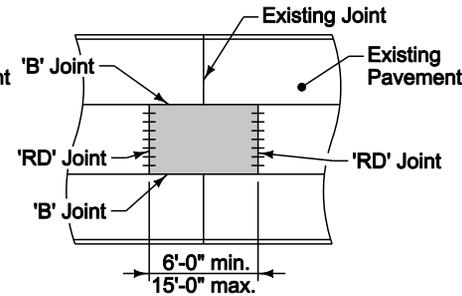

CENTER PANEL PATCH WITH OPPOSING JOINTS

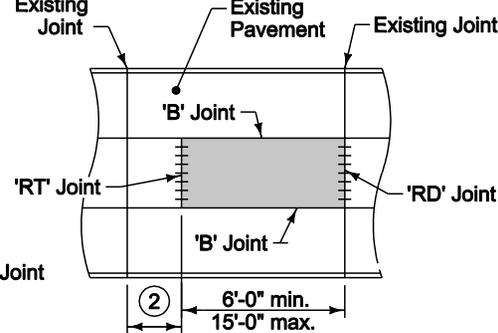


CENTER PANEL PATCH NO OPPOSING JOINT

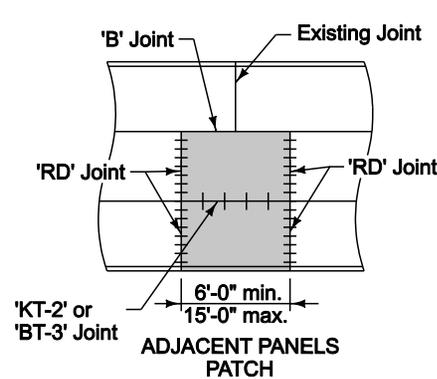

ADJACENT PANELS PATCH

- ① Patches on roadways with quarter point jointing will be similar to third point jointing details.
- ② Minimum distance between existing joint and patch is 6 feet. If distance is less than 6 feet, extend patch to existing joint.
- ③ When subgrade or subbase material is required below patch, bring material to bottom of pavement and match existing patch thickness.

### LONGITUDINAL SECTION THRU PCC PATCH

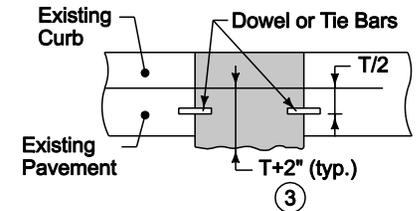

③

	REVISION
	New 10-19-10
	<b>7040.101</b>
SHEET 1 of 1	

SUDAS Standard Specifications

FULL DEPTH PCC PATCHES  
LESS THAN OR EQUAL TO 15' LONG