




**6" STANDARD CURB**

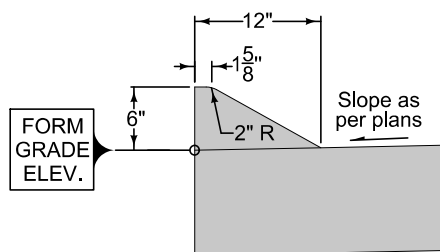


**6" SLOPED CURB**

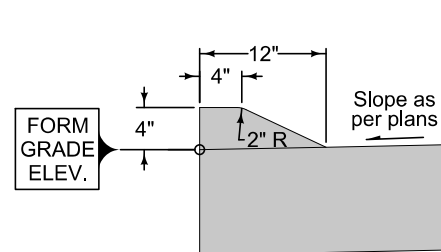


**4" SLOPED CURB**

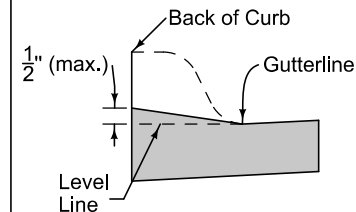


**DROP CURB  
AT SIDEWALK**

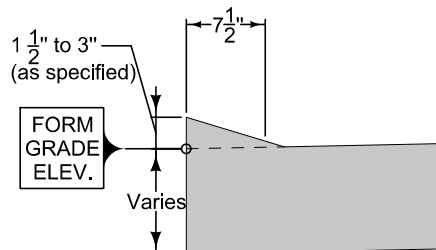


**DRIVEWAY DROP CURB**

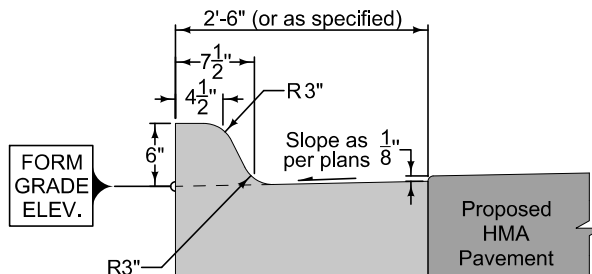


**6" STANDARD CURB AND GUTTER**

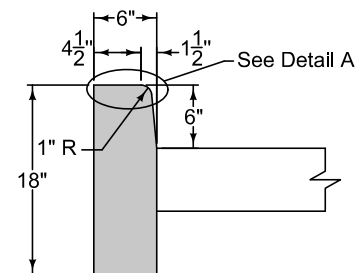


**BEAM CURB\***  
\*For short replacement sections,  
match existing curb profile




**DETAIL A**

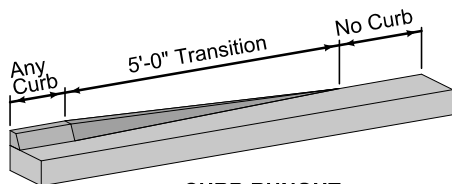


**CURB RUNOUT  
FOR ALL CURBS**



**CURB TRANSITION  
FROM 6" STANDARD TO 6" SLOPED**



**CURB TRANSITION  
FROM 6" SLOPED TO 4" SLOPED**



**CURB TRANSITION  
FROM 6" STANDARD TO 4" SLOPED**

REVISION	
1	10-16-12
<b>PV-102</b>	
SHEET 1 of 1	

REVISIONS: Added detail for CURB DROP AT SIDEWALK.

*Paul D. Wiegand* SUDAS DIRECTOR  
*Deanna Markoff* DESIGN METHODS ENGINEER