



Plan

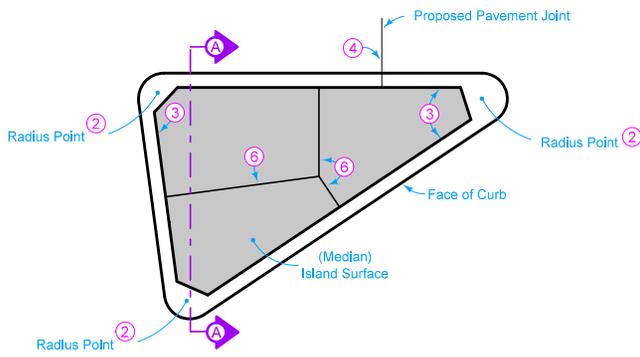

Jointing

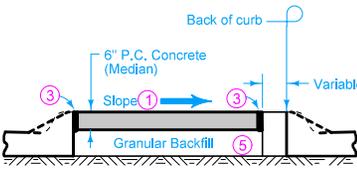

Section A-A

After required signs have been placed, fill any unused holes for sign posts with Flowable Mortar meeting the requirements of Section 2506 of the Standard Specifications. This work is incidental to sign placement.

Refer to Standard Road Plan PV-102 for curb information.

- ① Shape surface of island as necessary to drain.
- ② Radius point is located at back of curb. Pave across and between curbs on a straight line. See tabulation 101-13.
- ③ 'E' Joint, see PV-101.
- ④ Construct 'C' Joint In Curb as needed to continue intersection pavement joints. See PV-101.
- ⑤ The furnishing and placing of granular backfill is incidental to the price bid for 6 inch P.C. Concrete Median.
- ⑥ 'C' Joints as required. See PV-101.

Possible Contract Items:
Curb and Gutter, P.C. Concrete
Median, P.C. Concrete, 6 inch

Possible Tabulation:
112-04

 Iowa Department of Transportation	REVISION	
	1	10-15-13
STANDARD ROAD PLAN	PV-20	
	SHEET 1 of 1	

REVISIONS: Removed One Post Hole drawing and added a general note. Removed Possible Tabulation 100-24. Added Possible Contract Item.

Brian Smith
APPROVED BY DESIGN METHODS ENGINEER

PAVED ISLANDS