



Provide expansion joint at 48'-0" max. spacing (top and bottom rail. See expansion sleeve detail.

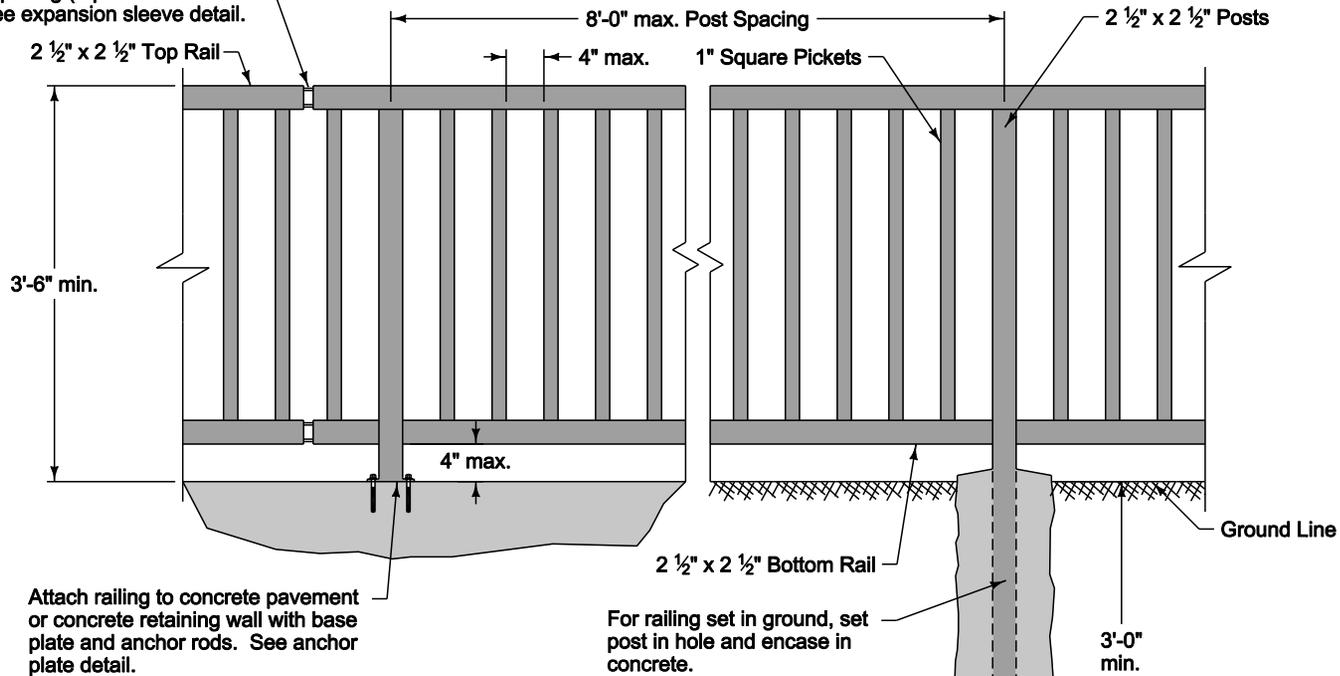


Weld all components with 1/4 inch fillet welds. Grind welds and connections as required to provide a smooth surface, free of burrs.

Field paint safety rail after installation as specified in the contract documents.

① Detail shown is for top rail. Expansion joint for bottom rail is similar.

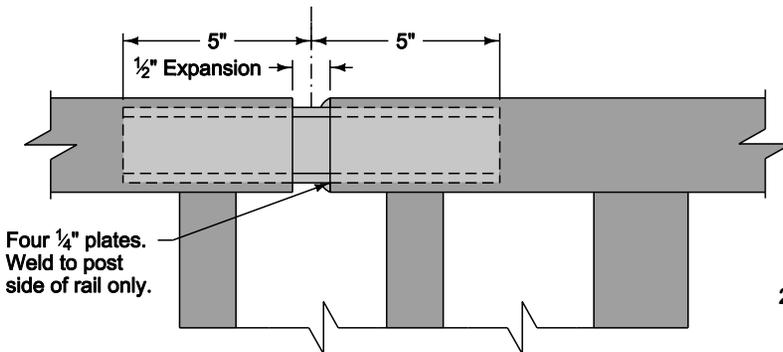

EXPANSION SLEEVE DETAIL ①

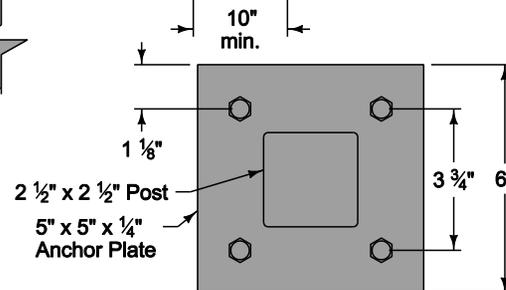

ANCHOR PLATE DETAIL

FIGURE 9080.103 SHEET 1 OF 1

| | |
|---|--------------------------|
|  | REVISION New 10-18-11 |
| | 9080.103 |
| | SHEET 1 of 1 |
| SUDAS Standard Specifications | |
| SAFETY RAIL | |