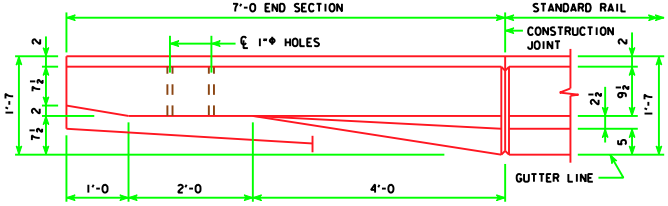

PART PLAN VIEW

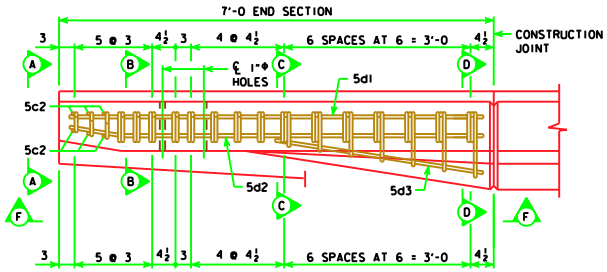

PART VIEW E-E

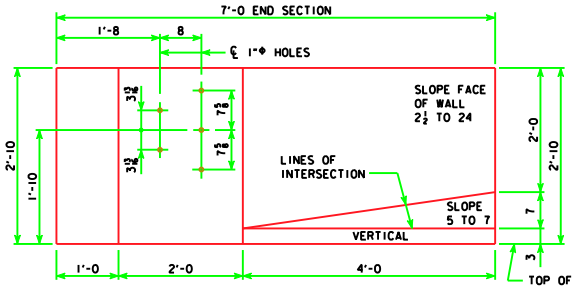

PART ELEVATION VIEW

PROVIDE 5 HOLES FORMED WITH 1"Φ PLASTIC CONDUIT. COST TO BE INCLUDED IN PRICE BID FOR CONCRETE BARRIER RAILING.

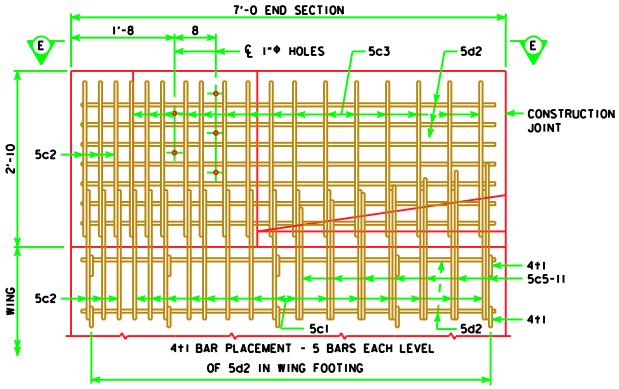

PART VIEW F-F

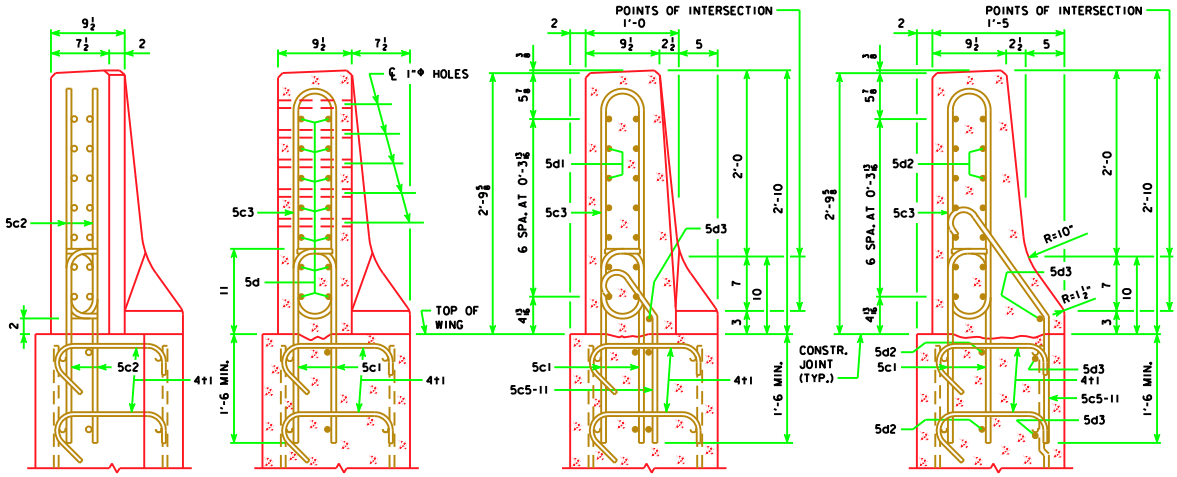

VIEW A-A SECTION B-B SECTION C-C SECTION D-D

EPOXY REINFORCING STEEL - ONE END SECTION

BAR	LOCATION	SHAPE	NO.	LENGTH	WEIGHT
5c1	VERTICAL, RAIL TO WING FOOTING		30	2'-10	89
5c2	VERTICAL AT NOSE, RAIL TO WING FOOTING		12	2'-9	34
5c3	VERTICAL		15	6'-1	95
5c5-11	VERTICAL		7	VARIES	27
5d1	HORIZONTAL		7	6'-8	49
5d2	HORIZONTAL		9	6'-9	63
5d3	HORIZONTAL		3	3'-5	11
4t1	WING FOOTING TIE BARS		10	VARIES	13
(INCLUDE WITH BARRIER RAIL REINFORCING)		TOTAL WEIGHT (LBS.)			381

CONCRETE PLACEMENT SUMMARY

SECTION	TOTAL
BARRIER RAIL ONE END SECTION	0.62 CU. YDS.

BENT BAR DETAILS

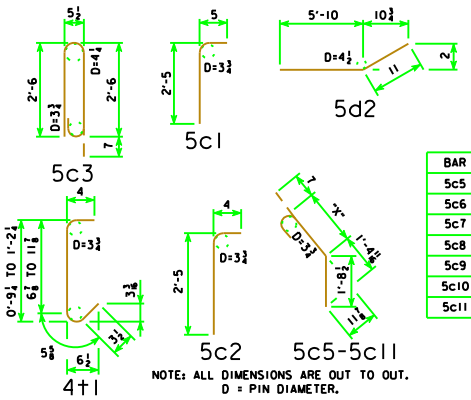

BAR	"X"
5c5	0'-6½
5c6	0'-8⅛
5c7	0'-9⅝
5c8	0'-11¼
5c9	1'-0⅞
5c10	1'-2⅜
5c11	1'-4

NOTE: ALL DIMENSIONS ARE OUT TO OUT.
D = PIN DIAMETER.

NOTES:

CONSTRUCTION JOINT BETWEEN TOP OF WING AND BARRIER RAIL IS ROUGHENED CONCRETE.

THE 10" RADIUS AND 1½" RADIUS ARE TYPICAL AND SHALL BE USED WHEN CONSTRUCTING THE CORNERS FOR VIEW A-A, SECTION B-B, SECTION C-C AND SECTION D-D.

THE 5c1, 6 - 5c2, 5c5-11, 2 - 5d2, 2 - 5d3 AND 4t1 BARS ARE TO BE PLACED WITH THE ABUTMENT WING FOOTING. THE DETAILS FOR PLACEMENT ARE SHOWN ON THE SUPERSTRUCTURE DETAIL SHEET.

DASHED LINES BELOW THE TOP OF WING ARE THE ABUTMENT WING REINFORCING STEEL. SEE SUPERSTRUCTURE DETAIL SHEETS FOR PLACEMENT.

LATEST REVISION DATE

APPROVED BY BRIDGE ENGINEER

Iowa Department of Transportation
Highway Division

STANDARD DESIGN - 44' ROADWAY, 3 SPAN BRIDGES

CONTINUOUS CONCRETE SLAB BRIDGES

NOVEMBER, 2006

BARRIER RAIL END SECTION

J44-47-06