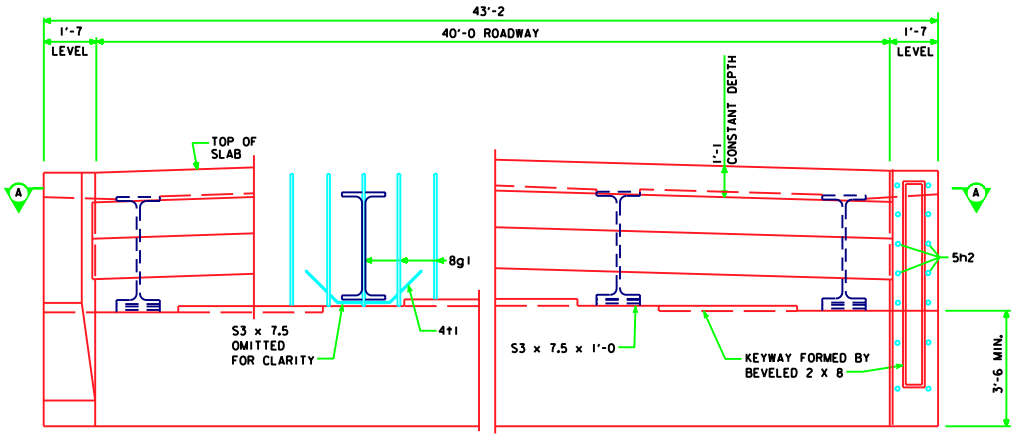

PART REAR ELEVATION AT ABUTMENT

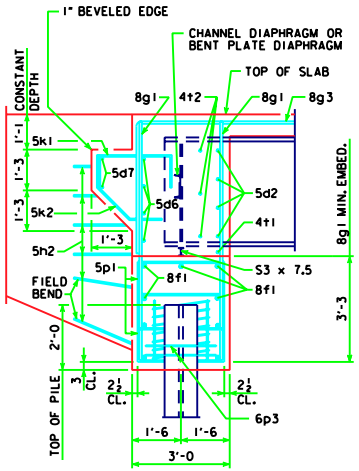

PART SECTION B-B

NOTES:
1. HOLES DRILLED THROUGH BEAM WEB FOR 5d2 AND 4t2 BARS.
2. THE SPIRAL AT THE TOP OF EACH PILE TO BE 7 TURNS OF No. 2 BAR, 21" DIAMETER, 3" PITCH WITH 2 - L 7/8 x 7/8 x 1/8 SPACERS PUNCHED TO HOLD SPIRAL.

ABUTMENT NOTES:

MINIMUM CLEAR DISTANCE FROM FACE OF CONCRETE TO NEAR REINFORCING BAR IS TO BE 2" UNLESS OTHERWISE NOTED OR SHOWN.

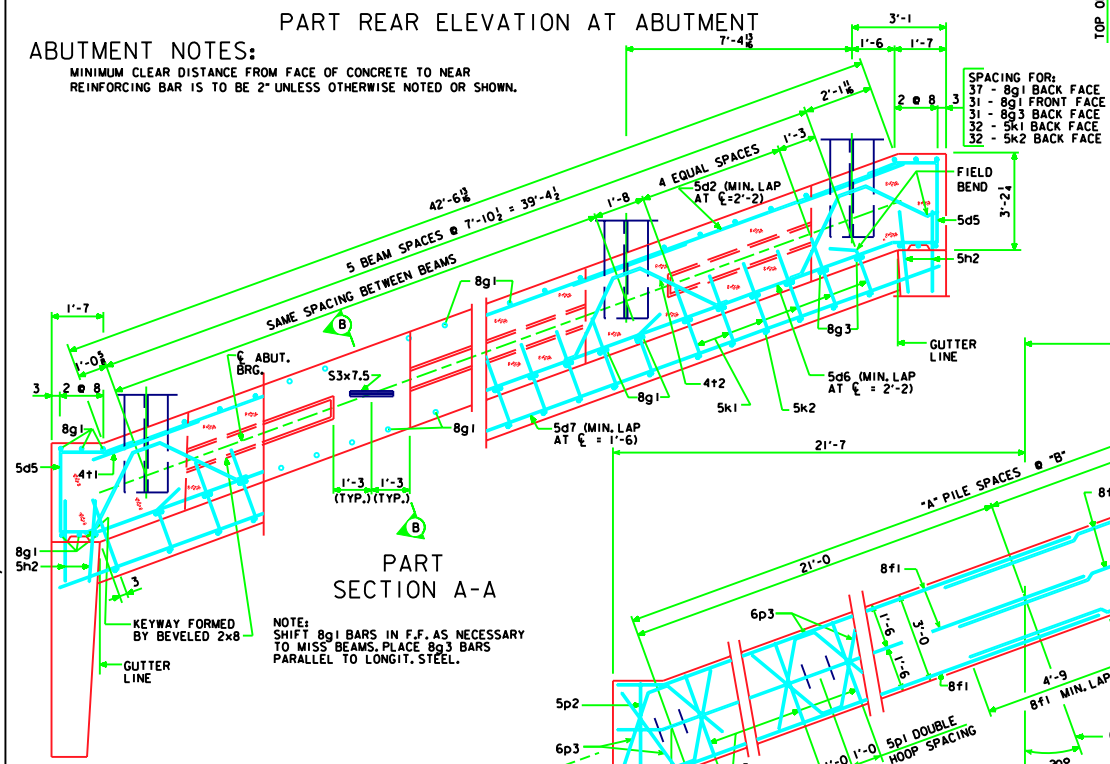

PART SECTION A-A

NOTE:
SHIFT 8g1 BARS IN F.F. AS NECESSARY TO MISS BEAMS. PLACE 8g3 BARS PARALLEL TO LONGIT. STEEL.

ABUTMENT PILE PLAN

ABUTMENT PILE SPACING

DIMENSION OR NO.	℄ TO ℄ ABUTMENT BEARING							
	160'-0	180'-0	200'-0	220'-0	240'-0	260'-0	280'-0	300'-0
"A" (IN)	6	6	7	7	7	8	8	8
"B" (FT-IN)	7'-0	7'-0	6'-0	6'-0	6'-0	5'-3	5'-3	5'-3
"C" EQUAL SPACES	5	5	4	4	4	3	3	3
NO. OF PILES PER ABUT.	7	7	8	8	8	9	9	9
DESIGN PILE LOAD (TONS)	35	37	34	35	37	34	35	37

NOTE: HP 10 x 42 STEEL BEARING PILING REQUIRED.

NOTE:
ABUTMENT STEP DIAGRAM PROVIDED BY DESIGNER, SEE "ESTIMATED BRIDGE QUANTITIES" SHEET.

NOTE: BARRIER RAIL NOT SHOWN IN DETAILS.

07-06
LATEST REVISION DATE

APPROVED BY BRIDGE ENGINEER

Iowa Department of Transportation
Highway Division

STANDARD DESIGN - 40' ROADWAY, 3 SPAN BRIDGES

ROLLED STEEL BEAM BRIDGES

FEBRUARY, 2004

ABUTMENT DETAILS
20° SKEW

RS40-23-04

REVISION - 07-06 - CHANGED TO ALL EPOXY, PAVING NOTCH EXTENDED. PILE SIZE NOTE AND BARRIER RAIL NOTE ADDED.