

**CHEVRON ALIGNMENT SIGN (W1-8)**

Colors: Chevron - Black (non-reflective)  
Background - Yellow (reflective)

To be effective, Chevron Alignment signs should be visible for at least 150 meters. The Chevrons should be attached to the adjustable bracket at an angle so headlight beams are not reflected back into the driver's eye. Trial runs at night may be desirable to determine final positioning.

The adjustable bracket shall be furnished in all aluminum or all galvanized steel products. All bolts shall include locking devices.


The price bid for "Guidance Marker, Chevron W1-8 (Special)" shall include furnishing and installing wood post, approved mounting bracket assembly, chevrons and all work necessary to install as shown.

Contract Item:


Guidance Marker, Chevron W1-8 (Special)

Tabulation: 108-34


① Adjust chevron locations as necessary to meet (S) as near as possible.

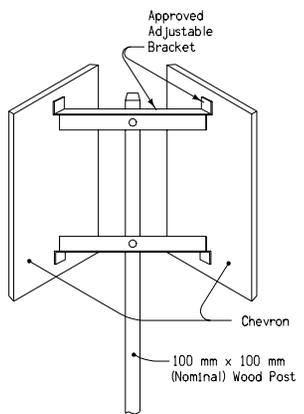

**BACK VIEW OF CHEVRON INSTALLATION**

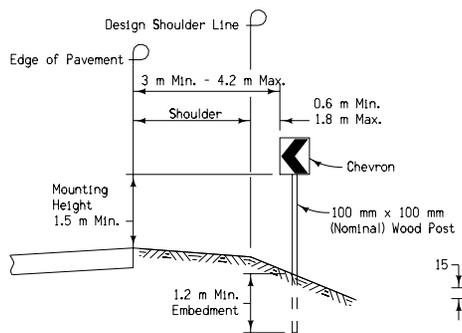


**TYPICAL SECTION**

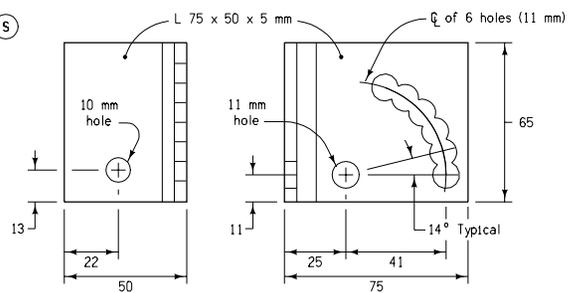

Right side. Left side is mirror image.

**BRACKET DETAIL**



**BRACE DETAIL**

All dimensions given in millimeters unless noted.

<b>M</b>		REVISION	1	10-17-06	
		<b>STANDARD ROAD PLAN</b>		<b>RD-34</b>	
		REVISIONS: Add backside chevron at P.C. and P.T. of curve.			
		SHEET 1 of 1			
<b>METRIC VERSION</b>	<i>Deanna Mayfield</i> APPROVED BY DESIGN METHODS ENGINEER				
<b>GUIDANCE MARKER CHEVRON</b> (Installation & Placement)					