



CAP PLAN

160'-0 TO 240'-0 SPANS 5c3 - 10 SP. @ 1'-0 = 10'-0
 260'-0 TO 280'-0 SPANS 5c3 - 13 SP. @ 9 1/4(-) = 10'-0
 300'-0 TO 340'-0 SPANS 5c3 - 17 SP. @ 7(+)= 10'-0

NOTE:
 SHIFT 5c1 BARS TO CLEAR
 d1 COLUMN BARS ALL SPANS.

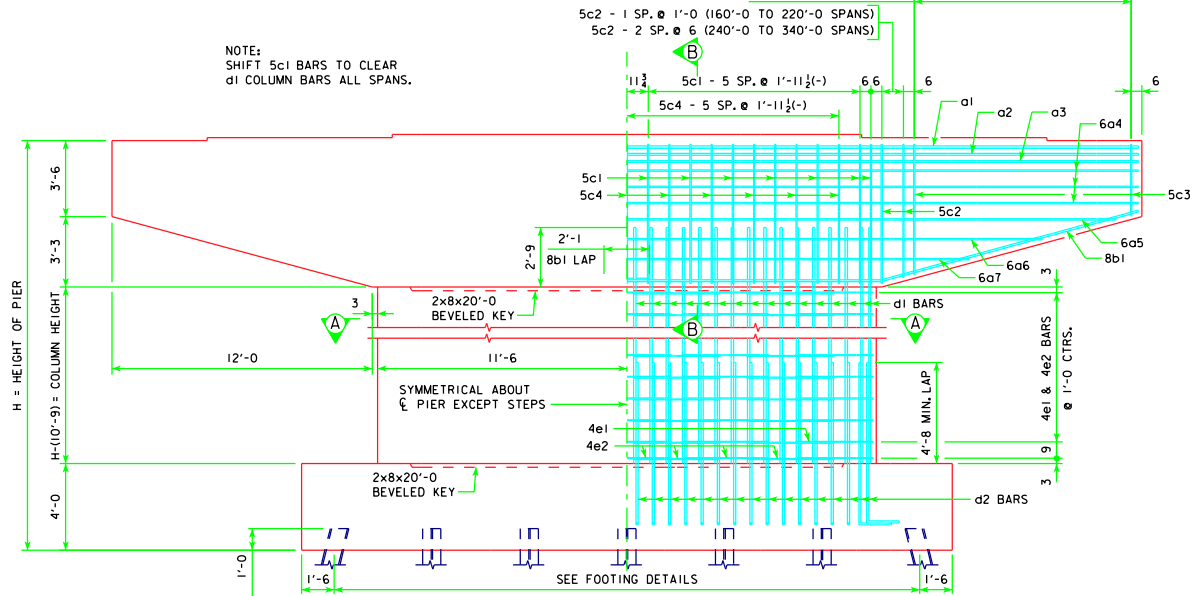


FRONT ELEVATION

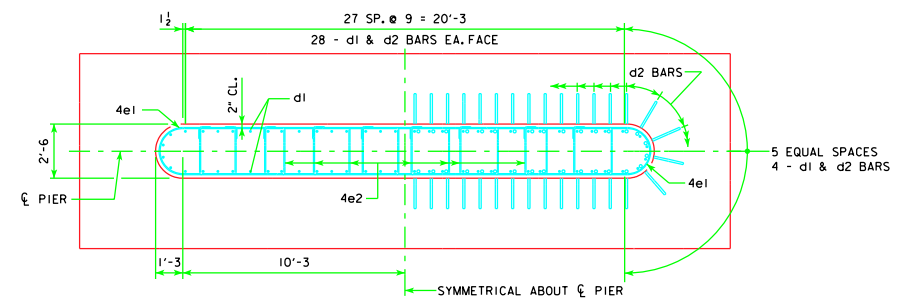


SECTION A-A



NOTE:
 ANCHOR BOLTS REQUIRED FOR FIXED
 PIER BEARINGS ONLY. FOR BOLT AND
 BEARING SIZES, SEE RS40-093-10,
 RS40-094-10 OR RS40-095-10.

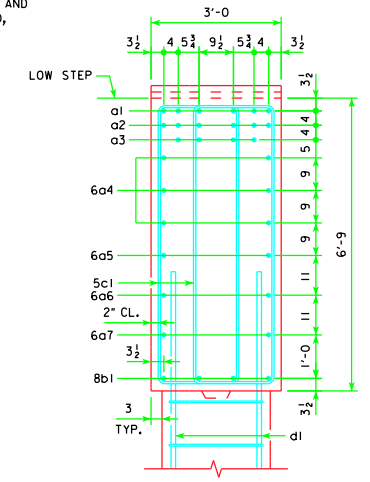

SECTION B-B

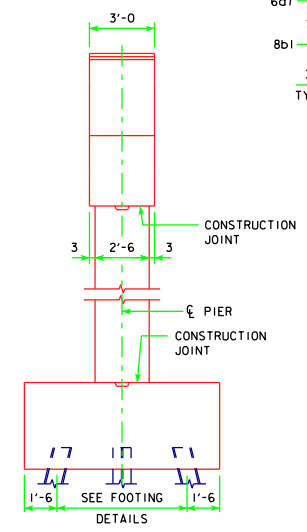

END ELEVATION

LATEST REVISION DATE	 APPROVED BY BRIDGE ENGINEER		
		STANDARD DESIGN - 40' ROADWAY, 3 SPAN BRIDGES ROLLED STEEL BEAM BRIDGES JUNE, 2010	
		TEE PIER CAP & COLUMN DETAILS 30° SKEW	RS40-146-10