


Furnish Type 1 delineator posts for each location unless specified otherwise in the plans.


$\frac{3}{16}$ " or $\frac{7}{16}$ " holes in delineators are acceptable.

All dimensions are in inches unless otherwise designated.

① Install post of sufficient length to provide a minimum of 30 inches of embedment when installed at the specified mounting height.



Hot dipped galvanized steel bolts, self-locking nuts, and washers, $\frac{5}{16}$ " x 2 $\frac{1}{2}$ " - 18 NC hex bolts and hex selflocking nuts with washers $\frac{11}{32}$ " I.D. x $\frac{11}{16}$ " O.D. x 0.091".

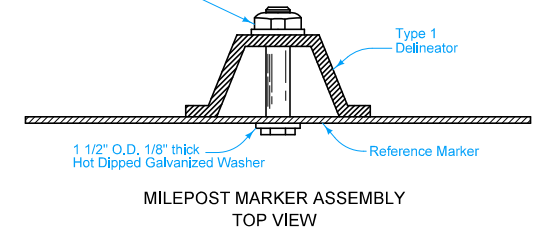


 STANDARD ROAD PLAN	REVISION
	2 04-19-16
	SI-171
SHEET 1 of 4	


REVISIONS: Updated sign colors and fonts on pages 2-4. Changed Neoprene Washer to Hot Dipped Galvanized on page 1.

Brian Smith
APPROVED BY DESIGN METHODS ENGINEER


REFERENCE POSTS

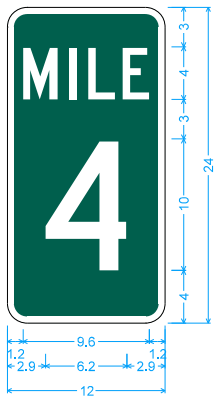


D10-1A:
1.50" Radius, 0.50" Border, White on Green;
[MILE] C 2K;
[4] C 2K;

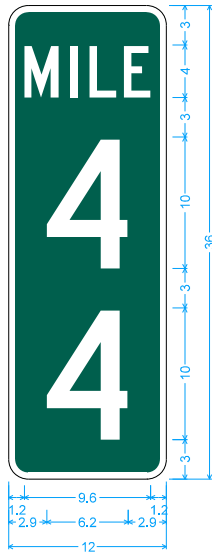


D10-2A:
1.50" Radius, 0.50" Border, White on Green;
[MILE] C 2K;
[4] C 2K; [4] C 2K;

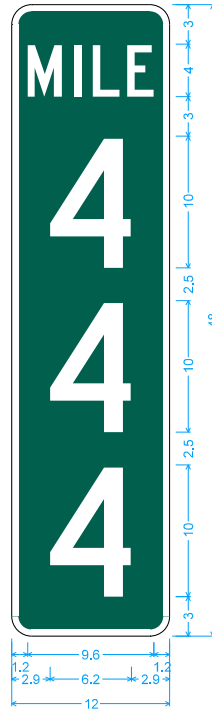


D10-3A:
1.50" Radius, 0.50" Border, White on Green;
[MILE] C 2K;
[4] C 2K; [4] C 2K;
[4] C 2K;




D10-5A:
1.50" Radius, No border, White on Black;




D10-9A:
1.50" Radius, No border, White on Black;
Rounded Rectangle 5.75" Radius;





D10-7A:
1.50" Radius, 0.50" Border, White on Green;
[A] E 2K;




D10-8A:
1.50" Radius, 0.50" Border, White on Green;
[AH] C 2K;




D10-9A:
1.50" Radius, 0.50" Border, White on Green;
[BK] C 2K;


 STANDARD ROAD PLAN	REVISION	
	2	04-19-16
	SI-171	
SHEET 2 of 4		
REVISIONS: Updated sign colors and fonts on pages 2-4. Changed Neoprene Washer to Hot Dipped Galvanized on page 1.		
APPROVED BY DESIGN METHODS ENGINEER 		
REFERENCE POSTS		

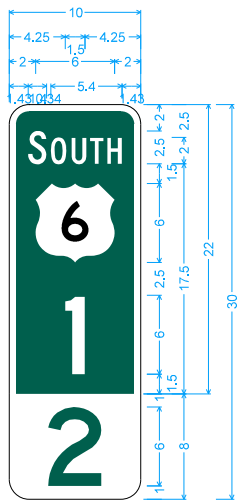

2.96 ← 4.08 → 2.96 |
 D10-1D;
 1.50" Radius, 0.50" Border, White on Green;
 [SOUTH] C 2K;
 [1] D 2K;
 1.50" Radius, No border, Green on White;
 [2] D 2K;

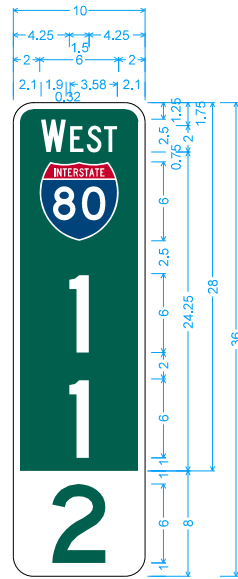


2.96 ← 4.08 → 2.96 |
 D10-2D;
 1.50" Radius, 0.50" Border, White on Green;
 [WEST] C 2K;
 [1] D 2K;
 [1] D 2K;
 1.50" Radius, No border, Green on White;
 [2] D 2K;

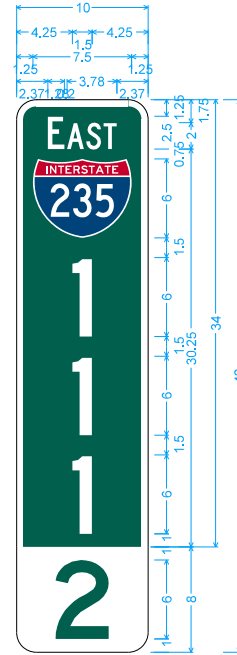


2.96 ← 4.08 → 2.96 |
 D10-3D;
 1.50" Radius, 0.50" Border, White on Green;
 [EAST] C 2K;
 [1] D 2K;
 [1] D 2K;
 [1] D 2K;
 [1] D 2K;
 1.50" Radius, No border, Green on White;
 [2] D 2K;


	REVISION	
	2	04-19-16
STANDARD ROAD PLAN	SI-171	
	SHEET 3 of 4	
<small>REVISIONS: Updated sign colors and fonts on pages 2-4. Changed Neoprene Washer to Hot Dipped Galvanized on page 1.</small>		
<small>APPROVED BY DESIGN METHODS ENGINEER</small>		
REFERENCE POSTS		

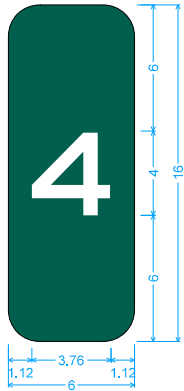


D10-1;
1.50" Radius, No border, White on Green;
[4] E 2K;

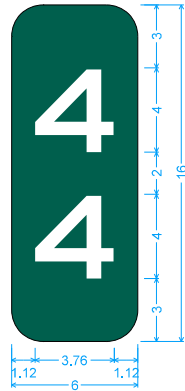


D10-2;
1.50" Radius, No border, White on Green;
[4] E 2K;
[4] E 2K;

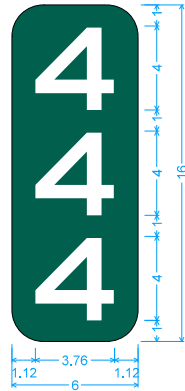


D10-3;
1.50" Radius, No border, White on Green;
[4] E 2K;
[4] E 2K;
[4] E 2K;




D10-5;
1.50" Radius, No border, White on Black;




D10-7;
1.50" Radius, No border, White on Green;
[A] E 2K;




D10-8;
1.50" Radius, No border, White on Green;
[AH] C 2K;




D10-9;
1.50" Radius, No border, White on Green;
[BK] C 2K;




D10-6;
1.50" Radius, No border, White on Black;
State Highway 92 M1-5;



0.50" Radius, No border, White on Green;
[A] E 2K;



0.50" Radius, No border, White on Green;
[AH] C 2K;



0.50" Radius, No border, White on Green;
[BK] C 2K;

	REVISION	
	2	04-19-16
STANDARD ROAD PLAN		SI-171
		SHEET 4 of 4
REVISIONS: Updated sign colors and fonts on pages 2-4. Changed Neoprene Washer to Hot Dipped Galvanized on page 1.		
APPROVED BY DESIGN METHODS ENGINEER		
REFERENCE POSTS		