



TYPICAL PLAN

NOTE:
ANCHOR BOLTS REQUIRED FOR FIXED PIER BEARINGS ONLY. FOR BOLT AND BEARING SIZES, SEE RS40-093-14, RS40-094-14 OR RS40-095-14.

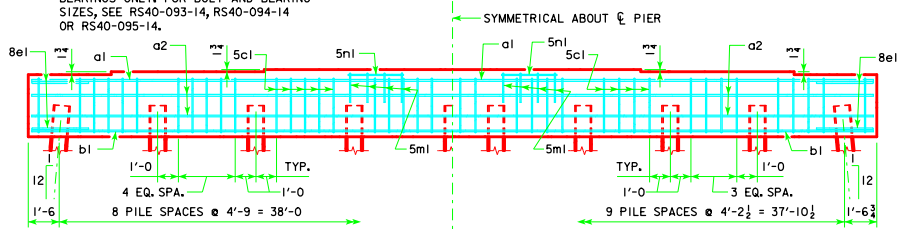


9 PILE BENT

10 PILE BENT

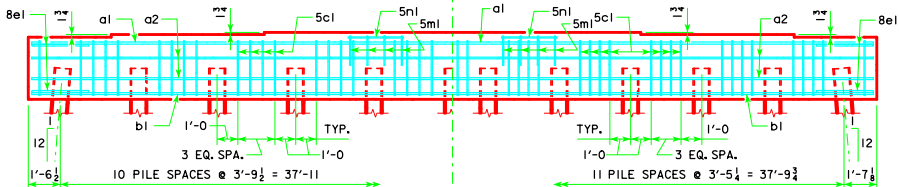


11 PILE BENT

12 PILE BENT

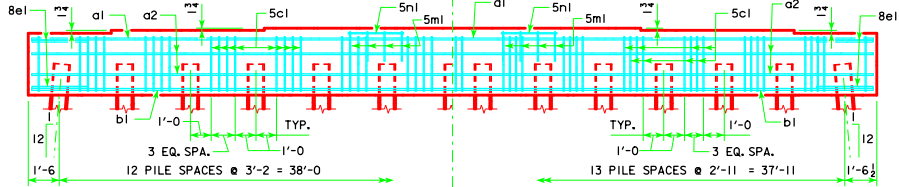


13 PILE BENT

14 PILE BENT

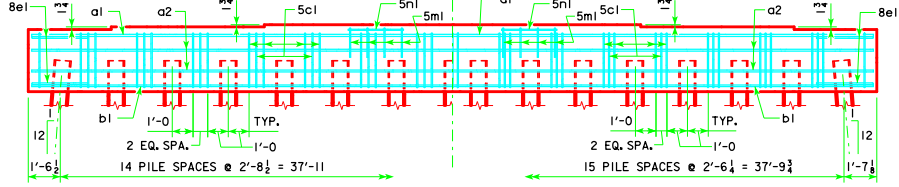


15 PILE BENT


16 PILE BENT



5ml & 5nl BAR LAYOUT



VIEW A-A FOR 9 & 10 PILE BENTS



VIEW A-A FOR 11, 12, 13, 14, 15 & 16 PILE BENTS

LATEST REVISION DATE APPROVED BY BRIDGE ENGINEER <i>Thomas E. Mc Donald</i>	
	STANDARD DESIGN - 40' ROADWAY, 3 SPAN BRIDGES ROLLED STEEL BEAM BRIDGES OCTOBER, 2014
	PILE BENT PIERS 0° SKEW
RS40-096-14	