


**TECHNICAL DATA INFORMATION - GEOTEXTILE FABRIC**

| MECHANICAL PROPERTIES             | TEST METHOD | UNIT  | MINIMUM AVERAGE ROLL VALUE |               |
|-----------------------------------|-------------|---|----------------------------|---------------|
|                                   |             |   | MD                         | CD            |
| TENSILE STRENGTH ( AT 5% STRAIN ) | ASTM D 4595 | kN/m ( LBS/FT )                                     | 19.8 ( 1356 )              | 19.8 ( 1356 ) |
| PERMEABILITY                      | ASTM D 4491 | CM/SEC ( IN/SEC )                                   | 0.038 ( 0.015 )            |               |
| FLOW RATE                         | ASTM D 4491 | L/MIN/m <sup>2</sup><br>( GAL/MIN/FT <sup>2</sup> ) | 733<br>( 18 )              |               |
| UV RESISTANCE ( AT 500 HOURS )    | ASTM D 4355 | % STRENGTH RETAINED                                 | 70                         |               |

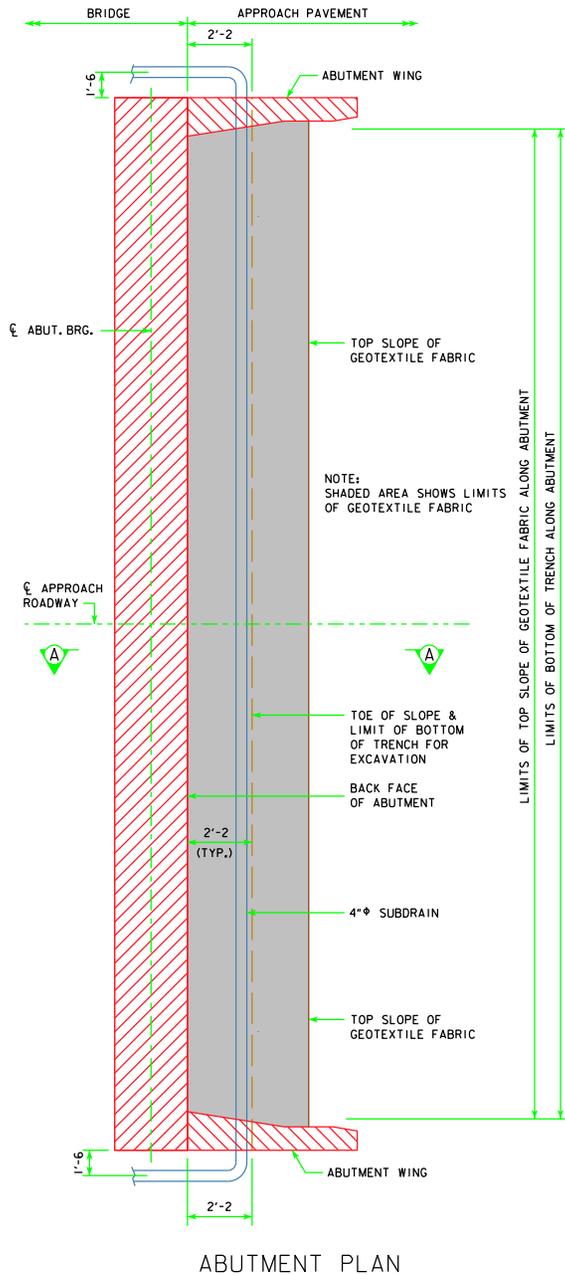

**ABUTMENT BACKFILL PROCESS:**

THE BASE OF THE EXCAVATION SUBGRADE BEHIND THE ABUTMENT IS TO BE GRADED WITH A 4% SLOPE AWAY FROM THE ABUTMENT FOOTING AND A 2% CROSS SLOPE IN THE DIRECTION OF THE SUBDRAIN OUTLET. THIS EXCAVATION SHAPING IS TO BE DONE PRIOR TO BEGINNING INSTALLATION OF THE GEOTEXTILE AND BACKFILL MATERIAL.

AFTER THE SUBGRADE HAS BEEN SHAPED THE GEOTEXTILE FABRIC SHALL BE INSTALLED IN ACCORDANCE WITH THE DETAILS SHOWN. THE FABRIC IS INTENDED TO BE INSTALLED IN THE BASE OF THE EXCAVATION AND EXTENDED VERTICALLY UP THE ABUTMENT BACKWALL, ABUTMENT WING WALLS, AND EXCAVATION FACE TO A HEIGHT THAT WILL BE APPROXIMATELY 1 TO 2 FOOT HIGHER THAN THE HEIGHT OF THE POROUS BACKFILL. THE STRIPS OF THE FABRIC PLACED SHALL OVERLAP APPROXIMATELY 1 FOOT AND SHALL BE PINNED IN PLACE. THE FABRIC SHALL BE ATTACHED TO THE ABUTMENT BY USING LATH FOLDED IN THE FABRIC AND SECURED TO THE CONCRETE WITH SHALLOW CONCRETE NAILS. THE FABRIC PLACED AGAINST THE EXCAVATION FACE SHALL BE PINNED.

WHEN THE FABRIC IS IN PLACE, THE SUBDRAIN SHALL BE INSTALLED DIRECTLY ON THE FABRIC AT THE TOE OF THE REAR EXCAVATION SLOPE. A SLOT WILL NEED TO BE CUT IN THE FABRIC AT THE POINT WHERE THE SUBDRAIN EXITS THE FABRIC NEAR THE END OF THE ABUTMENT WING WALL.

POROUS BACKFILL IS THEN PLACED AND LEVELED, NO COMPACTION IS REQUIRED.

THE REMAINING WORK INVOLVES BACKFILLING WITH GRANULAR BACKFILL, SURFACE FLOODING, AND VIBRATORY COMPACTION. THE GRANULAR BACKFILL MATERIAL SHALL HAVE 4% OR LESS PASSING THE #200 SIEVE (I.E. WASHED CONCRETE SAND). THE GRANULAR BACKFILL SHALL BE PLACED IN INDIVIDUAL LIFTS, SURFACE FLOODED, AND COMPACTED WITH VIBRATORY COMPACTION TO ENSURE FULL CONSOLIDATION. LIMIT THE LOOSE LIFTS TO NO MORE THAN 2 FEET OF THICKNESS.

START SURFACE FLOODING FOR EACH SAND LIFT AT THE HIGH POINT OF THE SUBDRAIN AND PROGRESS TO THE LOW POINT WHERE THE SUBDRAIN EXITS THE FABRIC. TO ENSURE UNIFORM SURFACE FLOODING, WATER RUNNING FULL IN A 2-INCH DIAMETER HOSE SHOULD BE SPRAYED IN SUCCESSIVE 6-FOOT TO 8-FOOT INCREMENTS FOR 5 MINUTES WITHIN EACH INCREMENT.

LIFT PLACEMENT, FLOODING, AND COMPACTION SHALL PROGRESS UNTIL THE REQUIRED FULL THICKNESS OF THE ABUTMENT BACKFILL HAS BEEN COMPLETED.


WATER REQUIRED FOR FLOODING, SUBDRAINS, POROUS BACKFILL, GRANULAR BACKFILL, AND GEOTEXTILE FABRIC FURNISHED AT THE BRIDGE ABUTMENTS WILL NOT BE MEASURED SEPARATELY FOR PAYMENT.

THE COST OF WATER REQUIRED FOR FLOODING, SUBDRAINS, POROUS BACKFILL, GRANULAR BACKFILL, AND GEOTEXTILE FABRIC FURNISHED AT THE BRIDGE ABUTMENTS SHALL BE INCLUDED IN THE CONTRACT UNIT PRICE BID FOR STRUCTURAL CONCRETE (BRIDGE).

**NOTE:**

SUBDRAIN SHALL SLOPE DOWNWARD 2% FROM  $\epsilon$  APPROACH ROADWAY WHEN OUTLETTING BOTH SIDES OF THE ABUTMENT.

SUBDRAIN SHALL SLOPE DOWNWARD 2% FROM HIGH END WHEN OUTLETTING AT ONE END OF THE ABUTMENT.

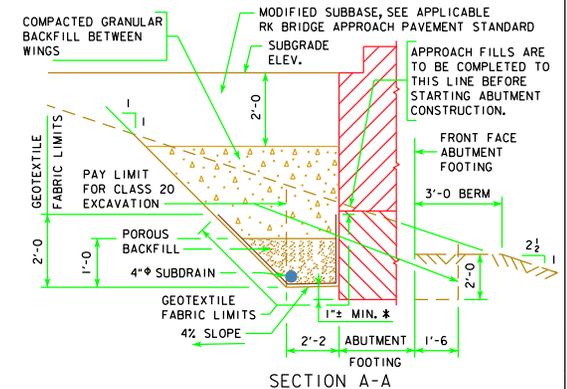

**SECTION A-A GRANULAR BACKFILL DETAILS**

NOTE: GEOTEXTILE FABRIC WILL BE ATTACHED TO FACE OF ABUTMENT FOOTING AND WINGS.

\* DIMENSION VARIES DUE TO 2% SUBDRAIN SLOPE.

NOTE: SEE SUBDRAIN DETAILS SHEET FOR DETAILS NOT SHOWN ON THIS SHEET WHICH ARE PERTINENT TO THIS STRUCTURE.

|                      |   |  |           |
|----------------------|---|--|-----------|
| LATEST REVISION DATE | <i>Thomas C. McQuinn</i><br>APPROVED BY BRIDGE ENGINEER |  |           |
|                      |   | STANDARD DESIGN - 30' ROADWAY, 3 SPAN BRIDGES<br><b>CONTINUOUS CONCRETE SLAB BRIDGES</b><br>DECEMBER, 2008 |           |
|                      |   | ABUTMENT BACKFILL DETAILS  | J30-47-06 |