


TYPE A


Two-piece fixed casting

TYPE C

Two-piece fixed casting with bolt-down cover ②

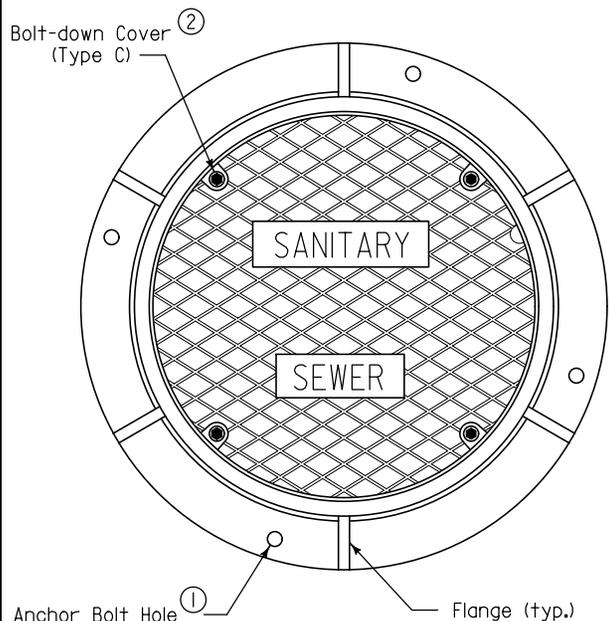

PLAN

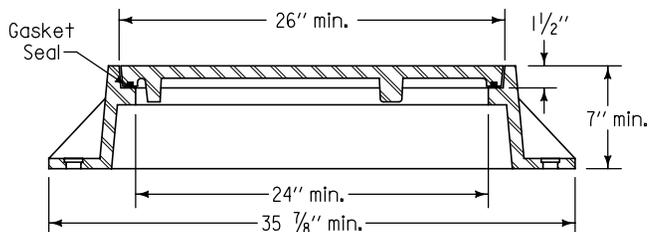


TYPICAL SECTION

TYPE B


Three-piece floating casting

TYPE D

Three-piece floating casting with bolt-down cover ②

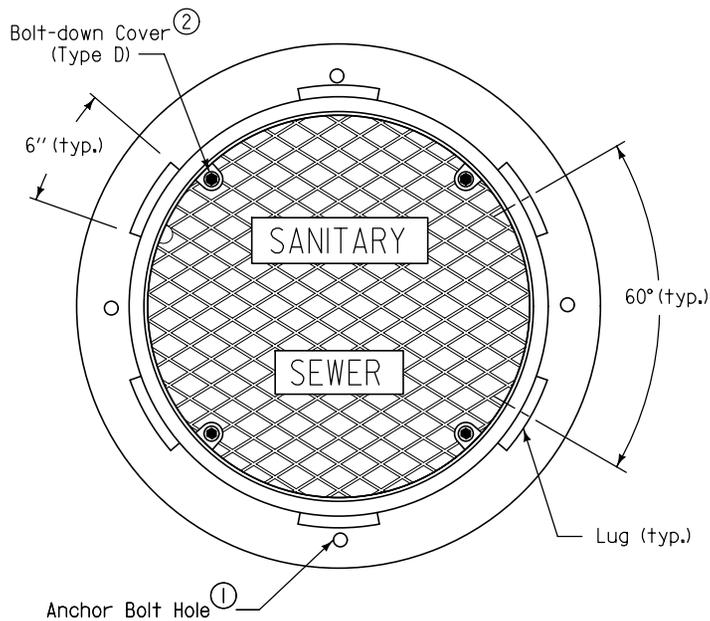

PLAN

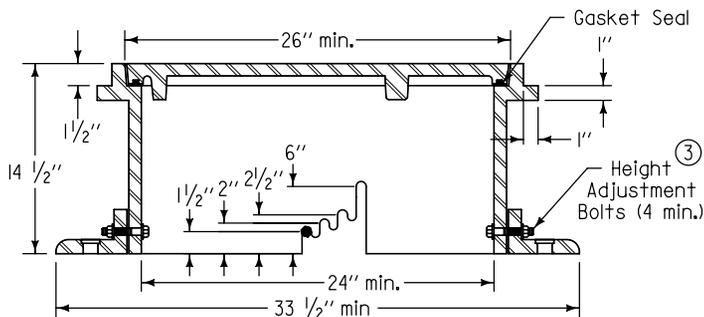

TYPICAL SECTION

Frame Notes:
Size and spacing of lugs and flanges may vary.

Cover Notes:
Roughness pattern and text style may vary.
Minimum one concealed pickhole.

- ① If frame is required to be attached to structure, drill four 7/8" diameter holes or slots, equally spaced around frame.
- ② If specified, furnish bolt down frame and cover with four 1/2" x 2 1/2" stainless steel, hex head, recessed cap screws. Secure cover with screws, washers, and rubber gasket seals.
- ③ Remove bolts upon completion of paving.

FIGURE 6010.601 SHEET 1 OF 1

| | | |
|---|--------------------|-------------------------|
| | | REVISION |
| | | NEW 04-21-09 |
| FIGURE 6010.601 | STANDARD ROAD PLAN | SW-601 |
| | | SHEET 1 of 1 |
| REVISIONS: New. Replaces SUDAS Figures 6020.7, 6020.8, 6020.9, and 6020.10. | | |
| | | |
| SUDAS DIRECTOR | | DESIGN METHODS ENGINEER |

**CASTINGS FOR
SANITARY SEWER MANHOLES**