


SUDAS STANDARD SPECIFICATIONS

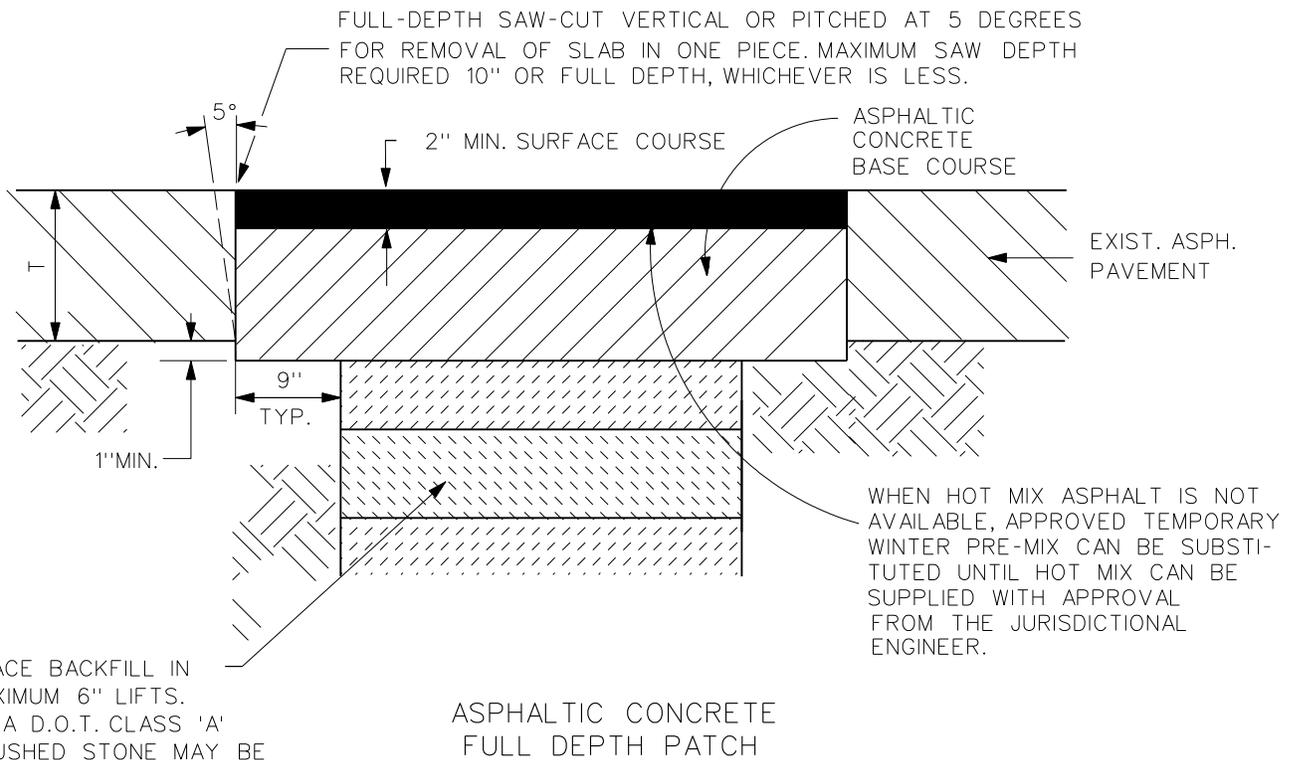

PLACE BACKFILL IN MAXIMUM 6" LIFTS. IOWA D.O.T. CLASS 'A' CRUSHED STONE MAY BE USED AS ALTERNATE BACKFILL MATERIAL COMPACTED TO 95% MAX. DENSITY.

REV.	DATE	BY	ASPHALTIC CONCRETE FULL DEPTH PATCH DETAILS	FIGURE: 7040.3
DATE: 01-01-98				SHEET 1 OF 1