



PAVEMENT REMOVAL DETAILS
LONGITUDINAL SECTION

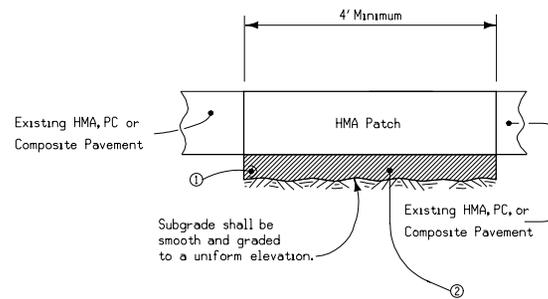


SECTION A-A

GENERAL NOTES:

- ① If longitudinal subdrain (shoulder) is not to be placed or if not present on the side of the roadway to be patched, then place proposed 3" slotted corrugated pipe at low end of patch.
- ② 6 inches granular subbase if required by plan. When placed, granular subbase should extend over longitudinal subdrain, if present.

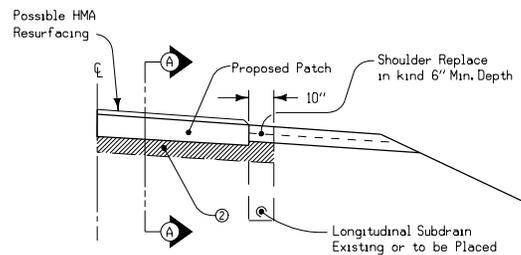

GRANULAR SUBBASE AND SUBDRAIN
(WHEN REQUIRED BY PLAN)
IF LONGITUDINAL SUBDRAIN IS PRESENT OR IS TO BE PLACED

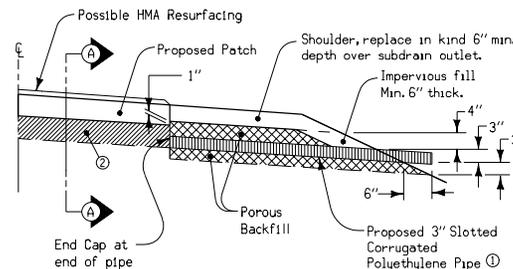

GRANULAR SUBBASE AND SUBDRAIN
(WHEN REQUIRED BY PLAN)
WITHOUT LONGITUDINAL SUBDRAIN

 Iowa Department of Transportation Highway Division	
STANDARD ROAD PLAN	RR-10
REVISION: NEW; Replaces Detail Sheet 532-1	REVISION NO. New
<i>William J. Allen</i> APPROVED BY: DESIGN METHODS ENGINEER	REVISION DATE 04-30-02
FULL DEPTH PATCH HOT MIX ASPHALT (EXISTING HMA, PC, OR COMPOSITE PAVEMENT)	