

STANDARD



BOTTOM RESTRAINED



CENTER RESTRAINED

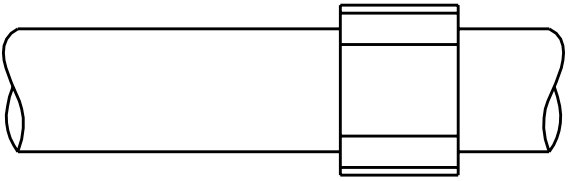

PIPE GUIDE

PIPE GUIDE SPACING	
NOMINAL PIPE SIZE (DIAMETER, IN.)	MAXIMUM GUIDE SUPPORT SPACING (FT.)
4	5
6	6
8	7
10	8
12	10
OVER 12	REFER TO PIPE MFR.

NOTE:
USE ONLY RESTRAINED TYPE GUIDES FOR PRESSURE CARRIER PIPES. PREVENT FLOTATION IF STANDARD TYPE GUIDE IS USED.

REV.	DATE	BY	PIPE GUIDE DETAIL	FIGURE: 3020.1
DATE: 01-01-98				SHEET 1 OF 1