

Price bid for "Bridge Drain Rock Splash Basin, RF-45" shall be considered full compensation for furnishing, installing, and constructing the Bridge Drain Rock Splash Basin as shown.

Contract Item:

Bridge Drain Rock Splash Basin, RF-45


Incidental to Bridge Drain Rock Splash Basin:

Erosion Stone or Class E Rip Rap



Engineering Fabric

Excavation, hauling and disposing of material

Tabulation: 100-25

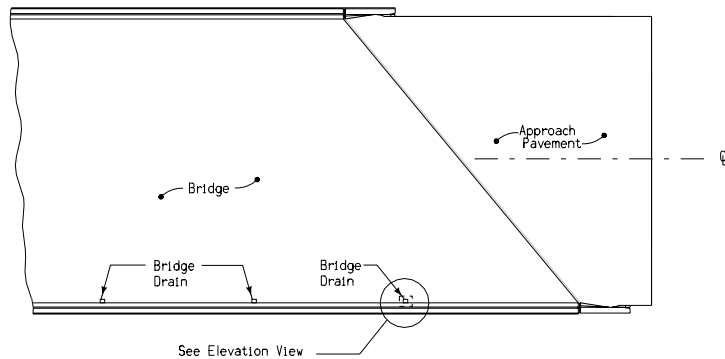


PLAN VIEW

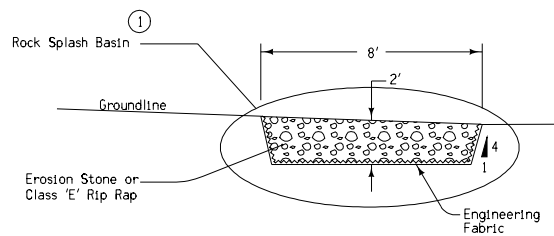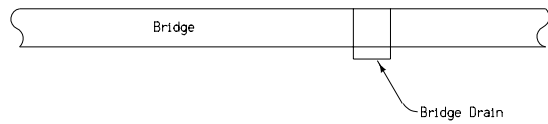

ELEVATION VIEW

① Rock splash basin shall be centered directly under the bridge drain, where water would otherwise land on soil.

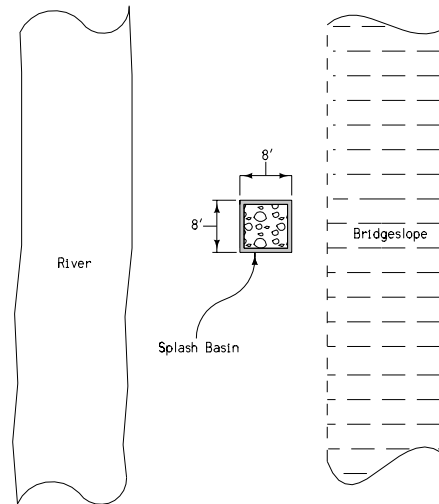

TOP VIEW

Table of Quantities

Item	Quantity
Erosion Stone or Class E Rip Rap	6.8 Tons
Engineering Fabric	14.2 Sq. Yds.
Class 10 Excavation	4.7 Cu. Yds.

 <b>Iowa Department of Transportation</b> Highway Division	
<b>STANDARD ROAD PLAN</b>	
<b>RF-45</b>	
REVISION: List Incidental Items, quantities, and Tabulation number.	REVISION NO. 1
APPROVED BY DESIGN METHODS ENGINEER <i>William J. Allen</i>	REVISION DATE 04-19-05

ROCK SPLASH BASIN  
UNDER BRIDGE DRAIN