


URBAN STANDARD SPECIFICATIONS for PUBLIC IMPROVEMENT MANUAL

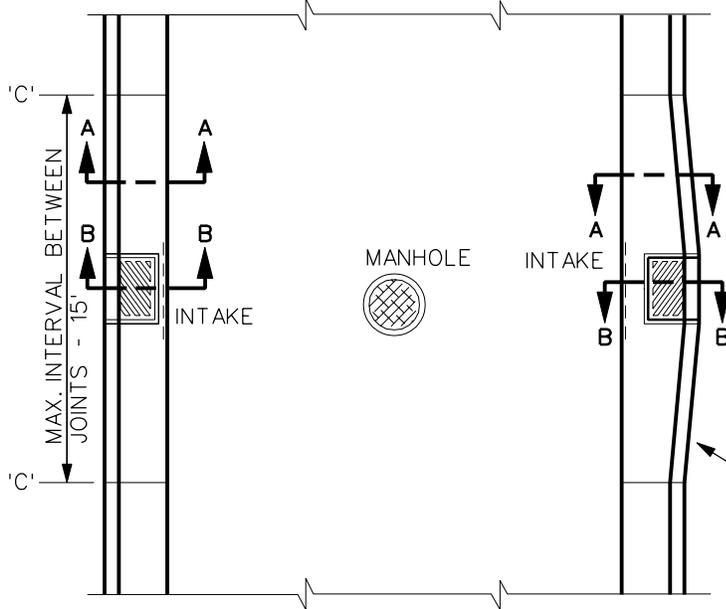


GENERAL NOTES


1. MANHOLES SHALL BE ADJUSTED IN ACCORDANCE WITH THE STANDARD SPECIFICATIONS
2. THE FACE OF GUTTER EDGE SHALL BE CLEANED AND SPRAYED WITH A TACK COAT.
3. WHERE PAVEMENT ABUTS AN UNIMPROVED STREET, IT SHALL BE TERMINATED WITH A HMA WEDGE
4. JOINTS IN P.C.C. CURB & GUTTER SHALL BE 'C' (DUMMY GROOVE JOINT).

ALTERNATE C & G SECTION: OFFSET 2.5' C & G 6" AT INTAKE LOCATIONS TO MAINTAIN 1 FT BETWEEN GUTTERLINE AND INSIDE EDGE OF CASTING.

TYPICAL PAVEMENT PLAN

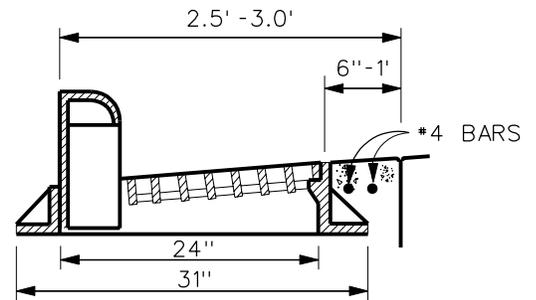


SECTION B-B

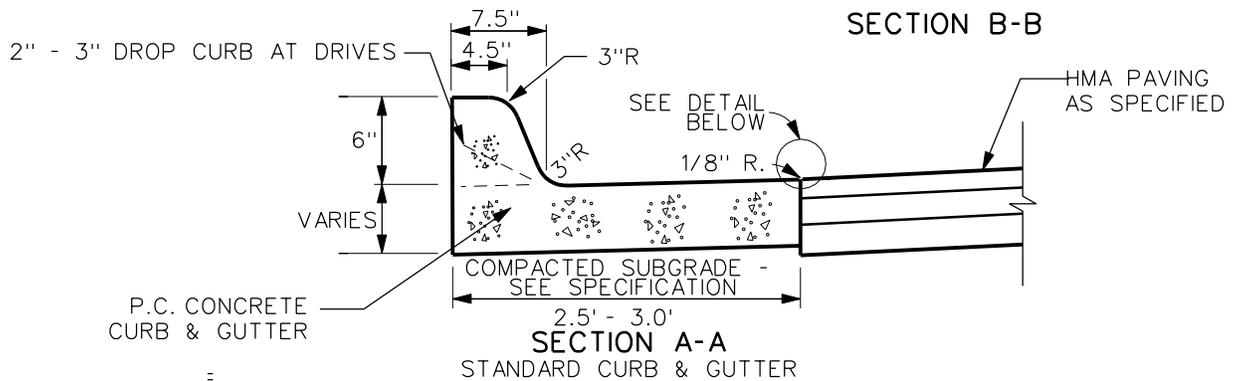


SECTION A-A

STANDARD CURB & GUTTER

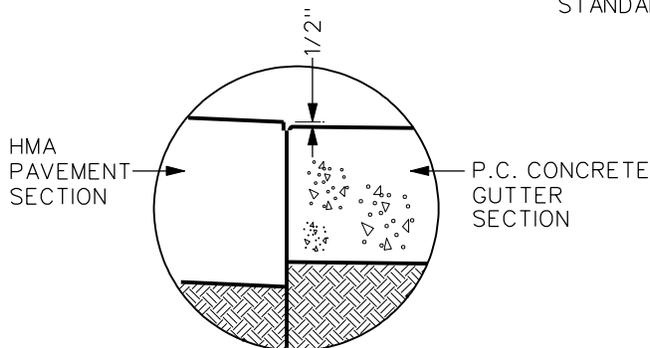

DETAIL

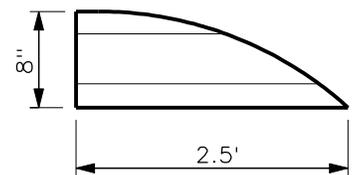

HMA WEDGE DETAIL (SEE NOTE 3)

2	10/19/04	
REV.	DATE	BY
DATE: 01-01-98		

PCC CURB FOR HMA PAVEMENT (GRATE INTAKE)

FIGURE: 7020.3

SHEET 1 OF 1