


SECTION A-A
(RAMP PROFILE FOR NEW PAVING)

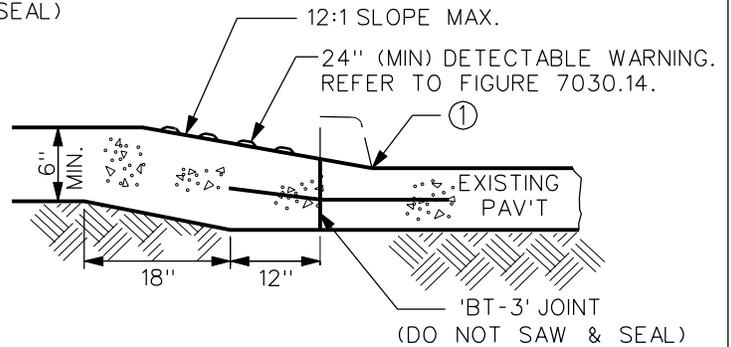

SECTION A-A
(RAMP PROFILE FOR GROUND/
SAWED CURB DROP)

① THE MAXIMUM ALLOWABLE GRADE BREAK BETWEEN CURB RAMP AND GUTTER SLOPE SHALL BE 13%.

NOTE:

USE OF THIS RAMP IS ACCEPTABLE ONLY IF RIGHT-OF-WAY RESTRICTIONS PROHIBIT USE OF RAMP SHOWN ON FIGURE 7030.10

3	10/19/04	
REV.	DATE	BY
DATE: 01-01-98		

**OPTIONAL PEDESTRIAN RAMP
WITHIN INTERSECTION RADIUS FOR
CLASS "A" SIDEWALK**

FIGURE: 7030.11

SHEET 1 OF 1