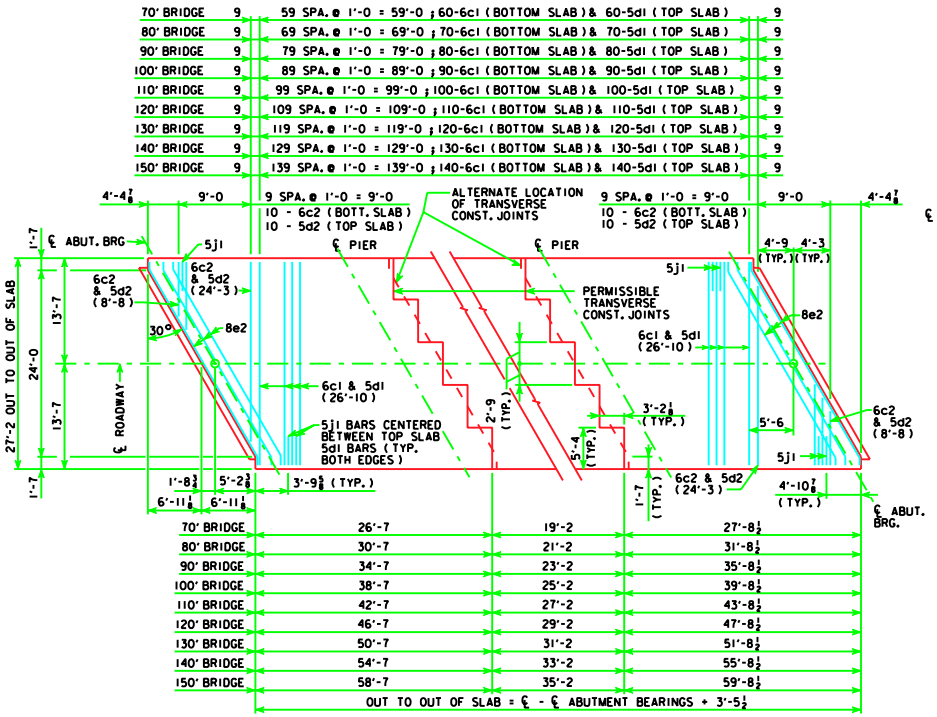

30° SKEW

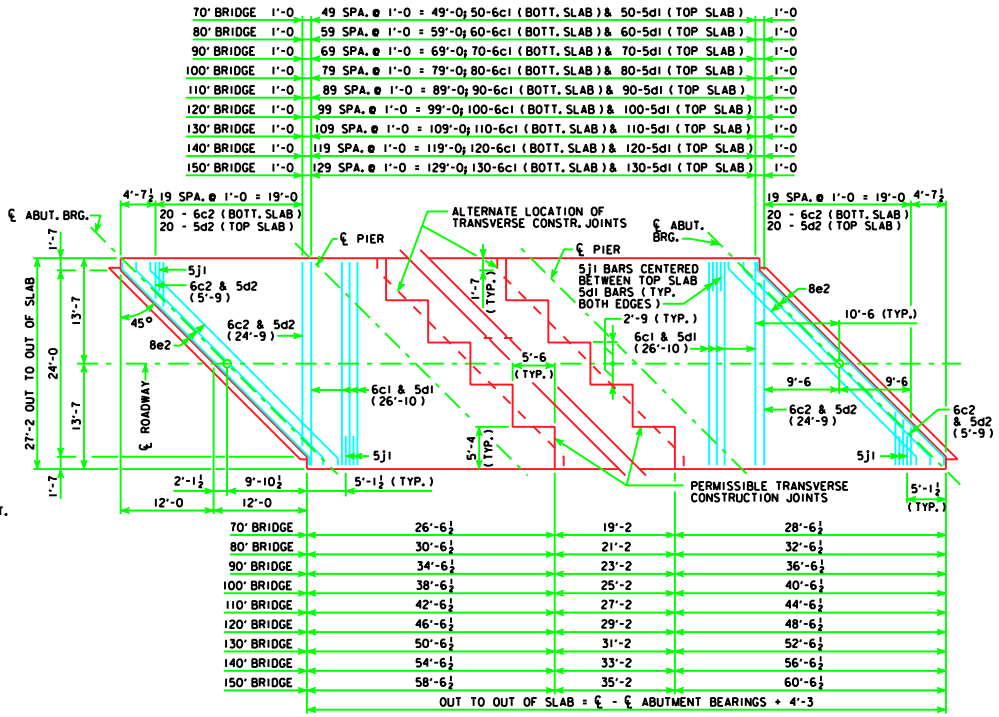

45° SKEW

TRANSVERSE REINFORCING STEEL LAYOUT

NOTE: 5d2 BARS ARE TO PASS UNDER 8e2 BARS IN CONFLICT AREAS ON 30° & 45° SKEW BRIDGES.



TRANSVERSE CONSTRUCTION JOINT

LATEST REVISION DATE	APPROVED BY BRIDGE ENGINEER	Iowa Department of Transportation Highway Division
		STANDARD DESIGN - 24' ROADWAY, 3 SPAN BRIDGES CONTINUOUS CONCRETE SLAB BRIDGES NOVEMBER, 2006
		SUPERSTRUCTURE DETAILS ALL BRIDGES 30° & 45° SKEW
		J24-22-06