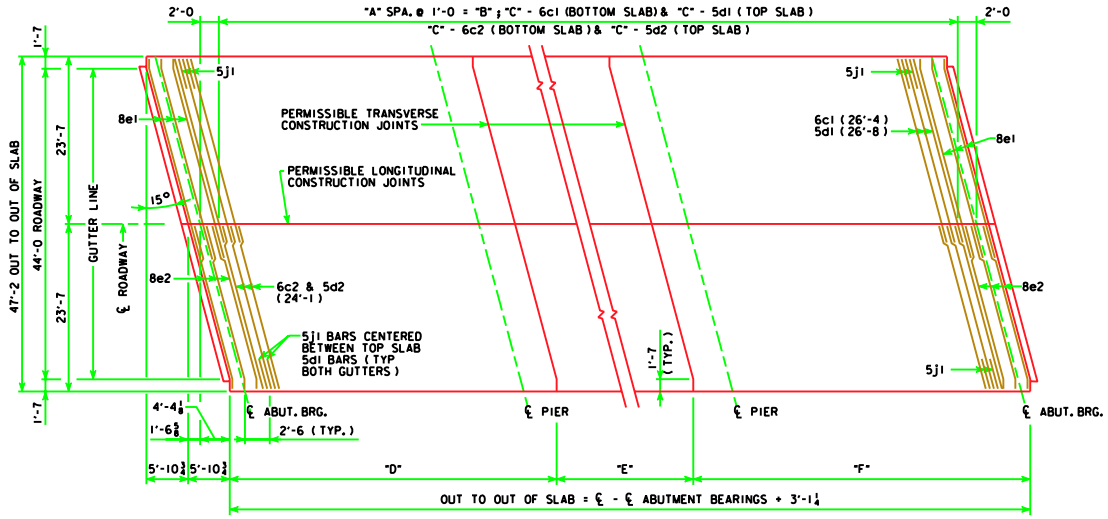

15° SKEW
TRANSVERSE REINFORCING STEEL LAYOUT

15° TRANSV. REINF. DIMENSION TABLE

BRIDGE	"A"	"B"	"C"	"D"	"E"	"F"
70' BRIDGE	66	66'-0	67	28'-0⅝	17'-0	28'-0⅝
80' BRIDGE	76	76'-0	77	32'-0⅝	19'-0	32'-0⅝
90' BRIDGE	86	86'-0	87	36'-0⅝	21'-0	36'-0⅝
100' BRIDGE	96	96'-0	97	40'-0⅝	23'-0	40'-0⅝
110' BRIDGE	106	106'-0	107	44'-0⅝	25'-0	44'-0⅝
120' BRIDGE	116	116'-0	117	48'-0⅝	27'-0	48'-0⅝
130' BRIDGE	126	126'-0	127	52'-0⅝	29'-0	52'-0⅝
140' BRIDGE	136	136'-0	137	56'-0⅝	31'-0	56'-0⅝
150' BRIDGE	146	146'-0	147	60'-0⅝	33'-0	60'-0⅝



TRANSVERSE CONSTR. JOINT

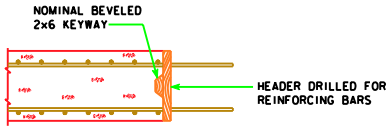

LONGITUDINAL CONSTR. JOINT



FLOOR DRAIN LOCATION

NOTE: 4" X 8" OUTSIDE DIMENSION ROLLED TUBE WITH ¼" WALL THICKNESS MAY BE SUBSTITUTED FOR THE WELDED DRAIN SHOWN.

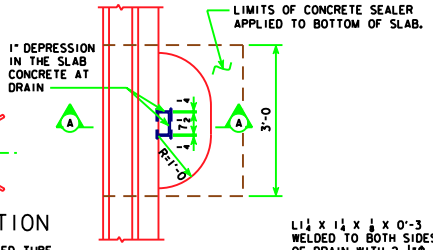

PART PLAN

FLOOR DRAIN DETAILS

(USE FOR BARRIER RAIL ONLY, NOT REQUIRED FOR OPEN RAIL)

NOTE: DRAINS ARE TO BE GALVANIZED. INCLUDE COST OF DRAINS IN PRICE BID FOR "STRUCTURAL CONCRETE". 4 DRAINS REQUIRED.

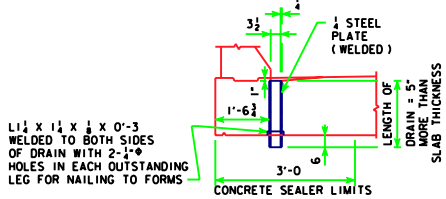

SECTION A-A

WEIGHT OF ONE FLOOR DRAIN			
SPAN	WEIGHT, LBS.	SPAN	WEIGHT, LBS.
70'-0	32	120'-0	41
80'-0	33	130'-0	43
90'-0	35	140'-0	45
100'-0	37	150'-0	48
110'-0	39		

LATEST REVISION DATE

APPROVED BY BRIDGE ENGINEER

Iowa Department of Transportation
Highway Division

STANDARD DESIGN - 44' ROADWAY, 3 SPAN BRIDGES

CONTINUOUS CONCRETE SLAB BRIDGES

NOVEMBER, 2006

SUPERSTRUCTURE DETAILS ALL BRIDGES
15° SKEW

J44-22-06