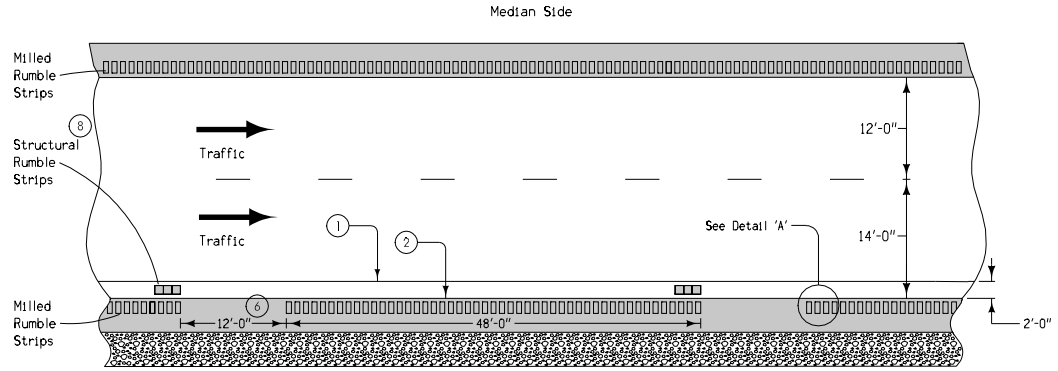

TYPICAL PLAN
(New Construction or Reconstruction)

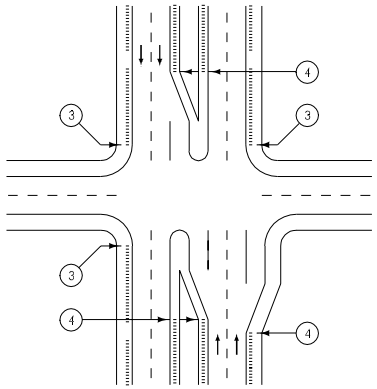

INTERSECTION

GENERAL NOTES:

Contract items:

Milled Shoulder Rumble Strips, HMA Surf.
Milled Shoulder Rumble Strips, PCC Surf.

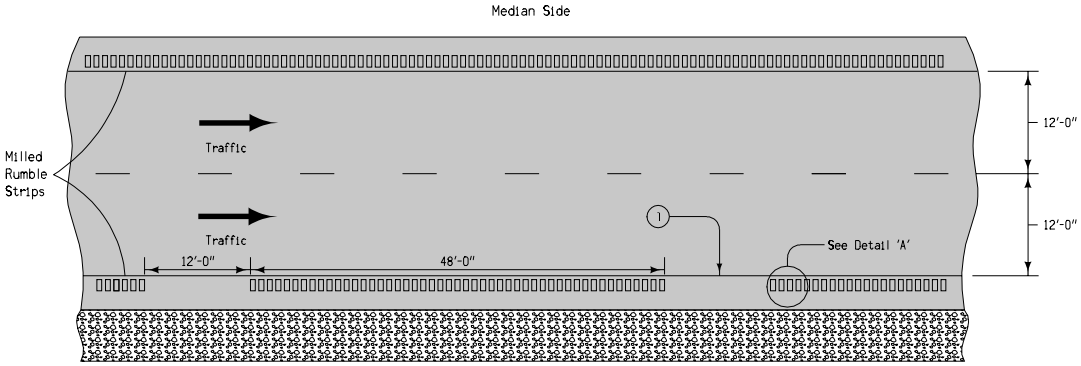

TYPICAL PLAN
(Retrofit)



RAMPS AND LOOPS

1. Painted edge line.
2. Edge of pavement.
3. End rumble strip at return.
4. End rumble strip at lane taper.
5. End rumble strips at gore area.
6. Start of 12'-0" gap shall coincide with end of formed rumble strip. Milled rumble strips shall be placed such that no structural rumble strips lay within 12'-0" gaps of milled rumble strips.
7. Painted edge line (HMA) or edge of pavement (PCC).
8. Structual Rumble Strips done by others as per RH-60.



DETAIL A
Plan View



DETAIL A
Profile View

Iowa Department of Transportation
Highway Division

STANDARD ROAD PLAN | **RH-62**

REVISION: Refer Structural Rumble Strips to RH-60.

REVISION NO.
1
REVISION DATE
10-21-03

William J. Stein
APPROVED BY DESIGN METHODS ENGINEER

SHOULDER RUMBLE STRIPS
(Expressways)