



4" PRECAST PCC PANELS  
 #4 BARS AT 6" C-C EACH WAY



DETAIL A

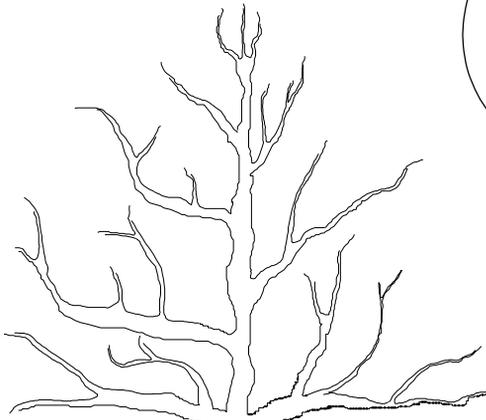

OPTIONAL TREE GUARD

1. AT INTERSECTIONS, TREES SHALL BE PLANTED AS PER PLAN OR OTHERWISE APPROVED BY ENGINEER.
2. FOR PLANTING DETAILS FIGURE 9030.1

TREE GRATE & FRAME (WITH SUBGRADE LIGHTING)  
 TREE GRATE TO BE A MINIMUM OF 5' SQUARE WITH MIN. 15" DIA. TREE OPENING.

FOR ALTERNATE TO GRATE AND FRAME SEE DETAIL A

3.5'

2" LAYER MULCH

PAVT.

8"

PLANTING SOIL  
 COMPACTED PLANTING SOIL  
 ENGINEERING FABRIC  
 SOIL SEPARATOR

12" LAYER OF 3/4" CLEAN SEPTIC TANK ROCK

4" DIAM. PERFORATED P.V.C. INSPECTION PIPE WITH ALUMINUM WINDOW SCREEN COVER.

NOTE:  
 REMOVE TOP ONE-THIRD OF ALL TWINE, BURLAP, AND WIRE BASKET FROM ROOTBALL.

1	10/2002	
REV.	DATE	BY
DATE: 04-04-97		

SIDEWALK TREE WELL

FIGURE: 9030.5

SHEET 1 OF 1